



15" RackMount Console



KVM-0115

H/W Version: 1

An Ideal Solution for Complete KVM Management

LevelOne announces the release of KVM-0115 and KVM-0117 KVM RackMount Console that incorporates a display with keyboard and trackball to manage the remote servers.

Multiple Input Interfaces

The LevelOne KVM-0115 and KVM-0117 provides the most economical and convenient server management-solutions available in today's competitive network management markets. Equipped with an integrated PS/2 and USB interface to control workstations through its integrated keyboard, touchpad and TFT display the KVM management switches provide full management access to server farms and other systems connected.

Bright Active Matrix TFT Display


The KVM-0115 and KVM-0117 KVM RackMount Console are available with either a 15 inch or 17 inch bright active matrix TFT display. With high resolutions display of up to 1024x768 on the 15 inch KVM-0115 and 1280x1024 on the 17 inch KVM-0117 LCD Drawers, system and server status can easily be monitored and managed from the TFT display.

Quick and Easy Installation

The LevelOne KVM-0115 and KVM-0117 also feature a unique 1U rack-mountable dual-rail design for easy installation and quick access in server control rooms or in a remotely controlled location.



1. DVI PC Port
2. VGA PC Port
3. USB PC Port
4. PS/2 PC Port
5. Power

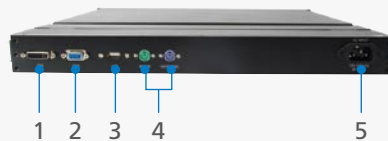

Key Features

- Bright Active Matrix TFT Display
- OSD function for LCD display
- Panel Protected by Tempered Glass
- 15 pins high density connector
- 15 Language keyboard format and easy glide touchpad
- Durable Keyboards (touchpad or trackball)
- Support PS/2 and USB Console Interface
- Support DVI Interface

Works Well With



KVM-1611
16-Port PS/2 KVM Switch



KVM-0831
8-Port combo KVM Switch w/
Expansion Slot

Technical Specification

Display Size

15"

Number of Port

1

Panel Type

Active Matrix TFT LCD

PC Interface

PS/2 x 2, USB x1, DVI x1

Resolution

1024 x 1786 (SXGA)

Pixel Pitch

0.297mm x0.297mm

Viewing Angle (CR > 10)

Right-Left view 130° (Typ) Up-Down View 100° (Typ)

Contrast Ratio

400:1

Brightness

White 250cd/m2 (Center 1 point Typ)

Back Light

Dual Lamps for Back Light

Colors Supported

16M Colors (6-bit with FRC)

Response Time

Rising Time 5ms, Decay Time 11ms

Operating System

Dos, Windows (3.1,9x, 2000, NT4, ME, XP, 2003 Server)

Linux, Novell 3.12-6, HP UX,SUN

Multi Platform

PS/2, SUN and USB

System cables

VGA, PS/2, DVI, USB

Keyboard Mouse

106 key PS/2 keyboard with touch pad

Sync

45-80KHZ

Power Source

100-240 VAC input

Dimension (mm)

447.5 x 482 x44mm

Weight

11.8Kg/ 26.0Lb

Power Consumption

16W, 10.41W for Panel

Operation Temp.

0~50 C


Storage Temp.

-20 ~ 60C

Humidity

10%~90%RH

Product Diagram

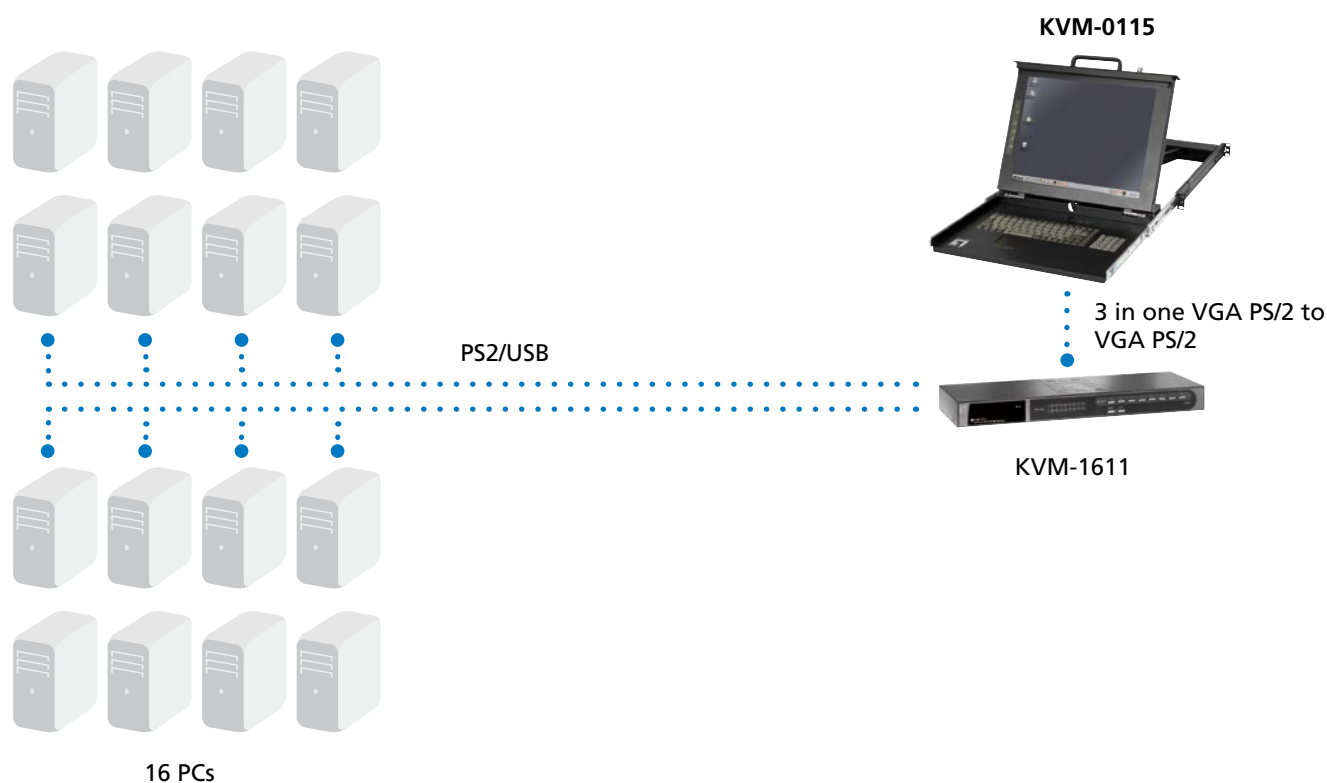

Order Information

KVM-0115: 15" RackMount Console

Package Contents

KVM-0115 x1, Rail with front and rear bracket x 1, Long brackets. (Needed for rack depth 828~1000mm) x 2, 1.8M cable (PS/2 mouse, PS/2 keyboard, DB15 VGA) x 1, USB x 1
DVI cable x1, Power cord x 1, CD with user manual x 1, QIG x 1, Keys x 2, Screws