


PHASE NOISE (1 Hz BW, typical)

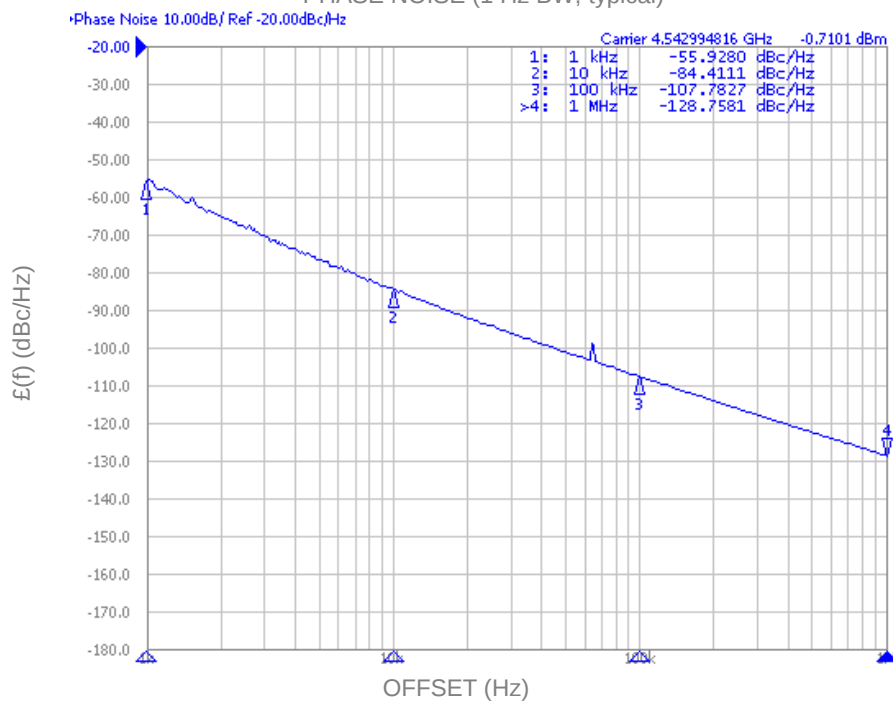

Voltage-Controlled Oscillator Surface Mount Module

Applications

- Cellular Receivers
- Satellite Communications
-

Application Notes


- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

Performance Specifications	Min	Typ	Max	Units
Oscillation Frequency Range	4200		4900	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-83		dBc/Hz
Harmonic Suppression (2nd)		-25	-22	dBc
Tuning Voltage	0.5		12	Vdc
Tuning Sensitivity (avg.)		110		MHz/V
Power Output	0	4.5	9	dBm
Load Impedance		50		Ω
Input Capacitance			50	pF
Pushing			7	MHz/V
Pulling (12 dB Return Loss, Any Phase)			44	MHz
Operating Temperature Range	-40		85	$^{\circ}\text{C}$
Package Style	MINI-14S-L			


Power Supply Requirements	Min	Typ	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		19	23	mA

Additional Notes


Tuning Curve, typ.

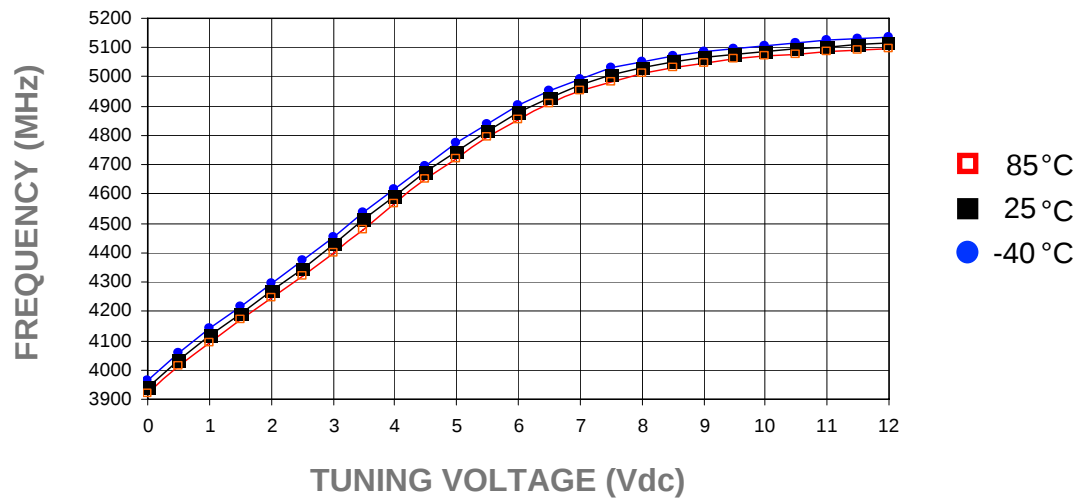


Power Curve, typ.

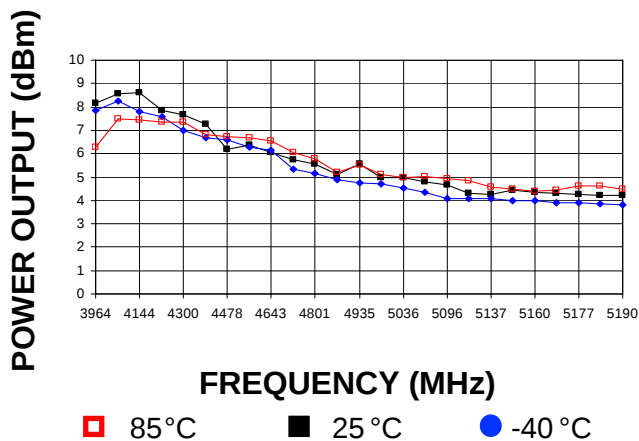

Footprint

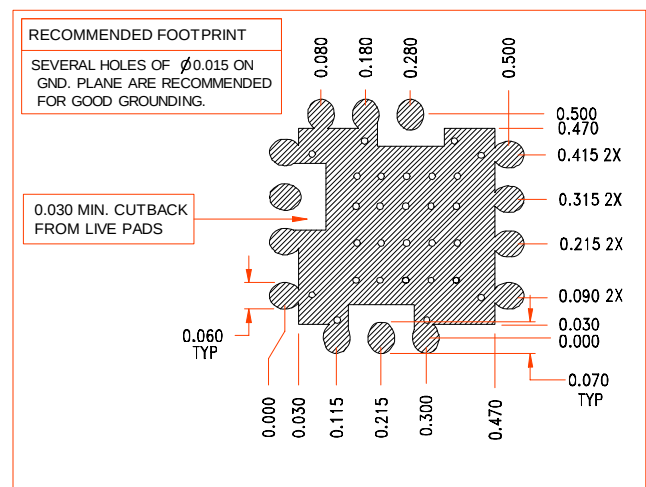

Physical Dimensions

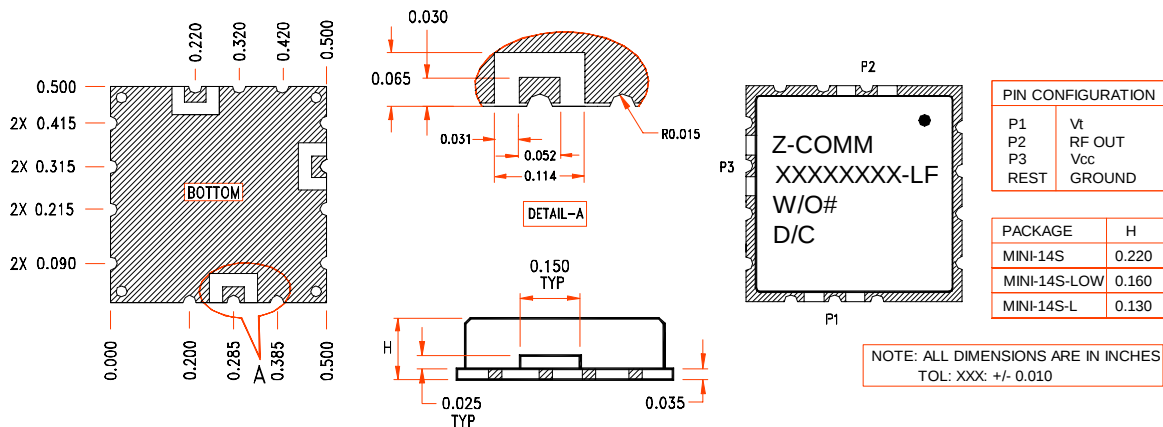

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.