

ADSL POTS LOW PASS FILTER FOR CUSTOMER PREMISES




- Compatible with all ADSL coding schemes
- Meets ANSI T1.413 and ITU-T G.992.1 (G.DMT) standards
- Compact package, includes connectors for ease of installation

Mechanical

Electrical Specifications @ 25°C – Operating Temperature -40°C to 85°C

Tested with up to:	100 mA DC Current
Impedance (Line and Phone Ports)	600 Ω
DCR each line	10 Ω MAX
Filter Characteristics	POTS/Loops/Modem
Voice Band Delay Distortion	200 μ Sec MAX
POTS Splitter 1 kHz Insertion Loss	0.75 dB MAX
200 Hz to 3.4 kHz I/L, Long Loop	+5.0 to -1.5 dB
3.4 kHz to 4 kHz I/L, Long Loop	+1.0 to -1.5 dB
-3dB Frequency (TYP)	14 kHz
Return Loss: (reference impedance)	ZNL-r (RT)
200 Hz: Long Loop (single frequency)	13 dB MIN
1000 Hz: Long Loop (single frequency)	10 dB MIN
2200 Hz: Long Loop (single frequency)	6.0 dB MIN
3400 Hz: Long Loop (single frequency)	4.5 dB MIN
POTS Longitudinal Balance	>53 dB
POTS Tip to Ring Capacitance	<115 nF
ADSL Attenuation (30 kHz - 1.1 MHz)	65 dB MIN
ADSL Disruption (30 kHz - 1.1 MHz)	0.25 dB MIN
High Frequency Disruption (2-10 MHz)	1.0 dB MAX

B2039A

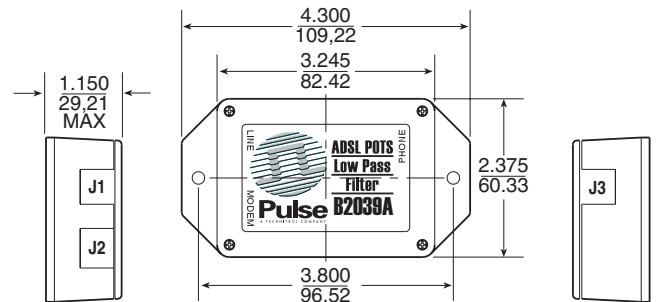


Connector	Function	Style	Tip	Ring
J1	Line	RJ11	Pin 3	Pin 4
J2	Modem	RJ45	Pin 4	Pin 5
J3	Phone	RJ11	Pin 3	Pin 4

NOTE: 2nd and 3rd pair Line Connections on J1 to J3 are unfiltered.




RJ11



RJ45

Frequency Response

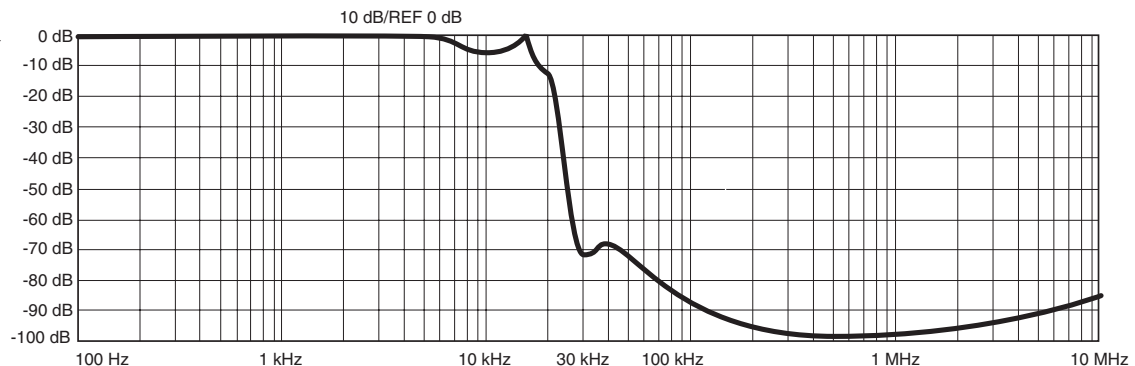

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 287 8998
FAX: 65 280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

19/F, China United Plaza
1008 Tai Nan West Street
Cheung Sha Wan, Kowloon
Hong Kong, China
Tel: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.