SPECIFICATIONS:

1. TEMP CLASS 105°C

2. INDUCTANCE: @ 0.1V, 10 KHz,
   1-4 = 225 µHy MIN


3. LEAKAGE INDUCTANCE: @ 100 KHz, 1-4
   WITH 5-8 SHORTED = 0.4 µHy MAX


4. TURNS RATIO: 1-4 : 5-8 = 1 : 1 ± 2%


5. DC RESISTANCE: 1-4, 5-8 = 0.1 OHMS, NOM

6. INTERWINDING CAPACITANCE @ 100 KHz
   1-4 TO 5-8 = 15 pF MAX


7. DIELECTRIC STRENGTH: 1500 Vac, 1 SECOND
   1 TO 5
   1, 5 TO CORE

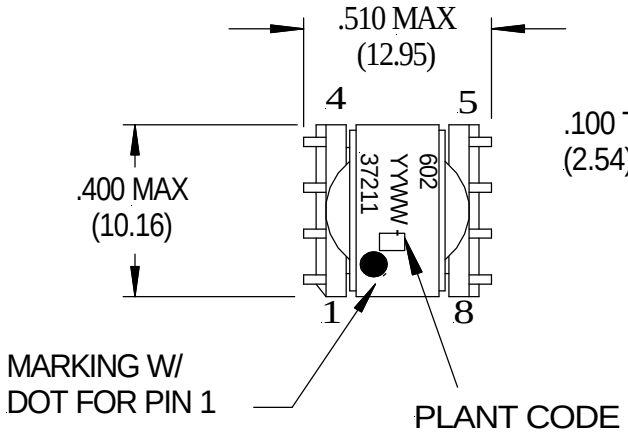

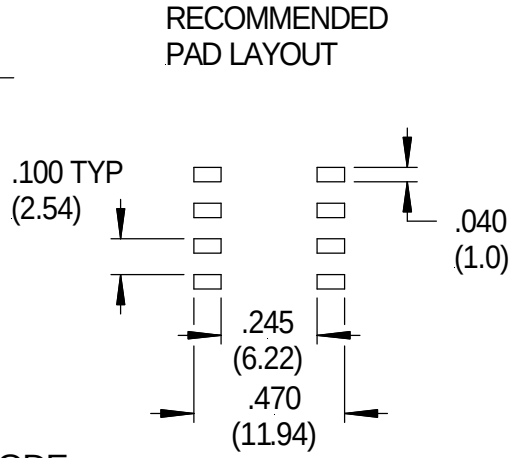

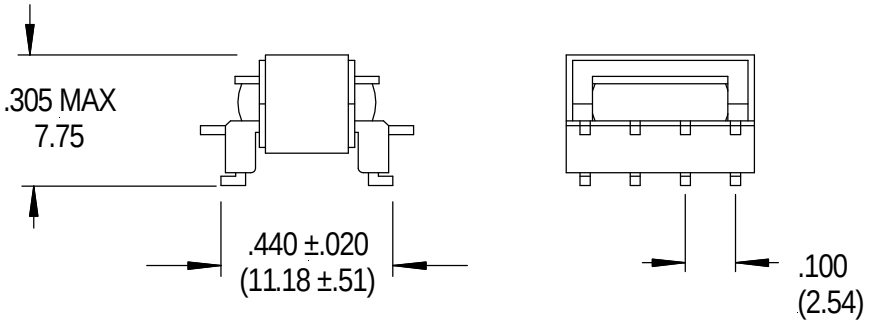

NOTE:
COPLANARITY < .006 (0.15)



TOLERANCES UNLESS OTHERWISE SPECIFIED	INCHES / DECIMAL	.XX = ± .01	.XXX = ±.005	ANGLES ± 1°
	MILLIMETERS (mm)	.XX = ± 0.20		