


KK74LV245

OCTAL BUS TRANSCEIVER; 3-State


The KK74LV245 is a low-voltage Si-gate CMOS device and is pin and function compatible with KK74HCT245.

The KK74LV245 is an octal transceiver featuring non-inverting 3-state bus compatible outputs in both send and receive directions. The KK74LV245 features an output enable (OE) input for easy cascading and a send/receive (DIR) input for direction control. OE controls the outputs so that the buses are effectively isolated.

- Output voltage levels are compatible with input levels of CMOS, NMOS and TTL ICs
- Supply voltage range: 1.2 to 3.6 V
- Low input current: 1.0 μ A; 0.1 μ A at T = 25 °C
- Output Current: 8 mA at V_{CC} = 3.0 V
- High Noise Immunity Characteristic of CMOS Devices

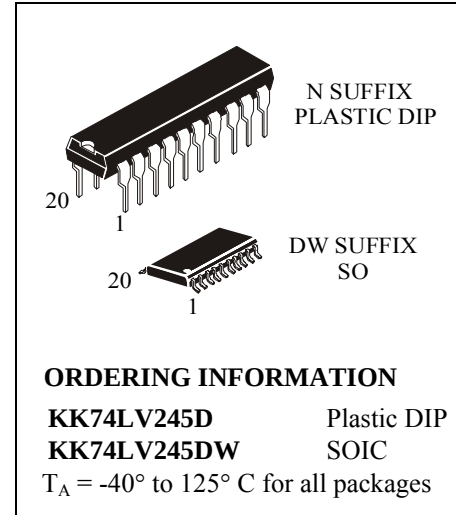


LOGIC DIAGRAM

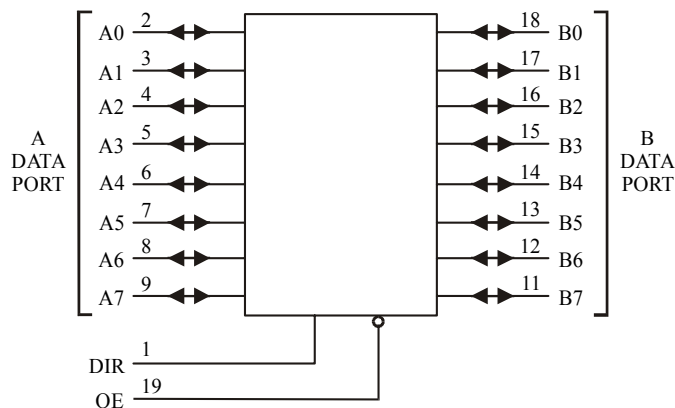

PIN 20=V_{CC}
PIN 10 = GND

PIN ASSIGNMENT

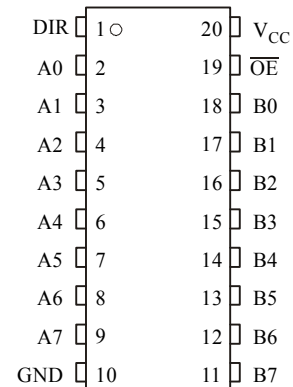

FUNCTION TABLE

Inputs		Inputs/outputs	
OE	DIR	A	B
L	L	A=B	input
L	H	input	B=A
H	X	Z	Z

H= high level
L = low level
X = don't care
Z = high impedance

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
V_{CC}	DC supply voltage	-0.5 to +5.0	V
I_{IK}^{*1}	DC Input diode current	± 20	mA
I_{OK}^{*2}	DC Output diode current	± 50	mA
I_O^{*3}	DC Output source or sink current	± 35	mA
I_{CC}	DC V_{CC} current	± 70	mA
I_{GND}	DC GND current	± 70	mA
P_D	Power dissipation per package: *4 Plastic DIP SO	750 500	mW
T_{stg}	Storage Temperature	-65 to +150	$^{\circ}C$
T_L	Lead Temperature, 1.5 mm (Plastic DIP Package), 0.3 mm (SO Package) from Case for 4 Seconds	260	$^{\circ}C$

*Maximum Ratings are those values beyond which damage to the device may occur.
Functional operation should be restricted to the Recommended Operating Conditions.

$^{*1} V_I < -0.5 \text{ V}$ or $V_I > V_{CC} + 0.5 \text{ V}$.

$^{*2} V_O < -0.5 \text{ V}$ or $V_O > V_{CC} + 0.5 \text{ V}$.

$^{*3} -0.5 \text{ V} < V_O < V_{CC} + 0.5 \text{ V}$.

*4 Derating - Plastic DIP: - 12 mW/ $^{\circ}C$ from 70 $^{\circ}$ to 125 $^{\circ}C$
SO Package: : - 8 mW/ $^{\circ}C$ from 70 $^{\circ}$ to 125 $^{\circ}C$

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
V_{CC}	DC Supply Voltage	1.2	3.6	V
V_I	Input Voltage	0	V_{CC}	V
V_O	Output Voltage	0	V_{CC}	V
T_A	Operating Temperature, All Package Types	-40	+125	$^{\circ}C$
t_r, t_f	Input Rise and Fall Time (Figure 1) $V_{CC}=1.2 \text{ V}$ $V_{CC}=2.0 \text{ V}$ $V_{CC}=3.0 \text{ V}$ $V_{CC}=3.6 \text{ V}$	0 0 0 0	1000 700 500 400	ns

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{IN} and V_{OUT} should be constrained to the range $GND \leq (V_{IN} \text{ or } V_{OUT}) \leq V_{CC}$.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

Symbol	Parameter	Test conditions	V _{CC} V	Guaranteed Limit						Unit
				25°C		-40°C to 85°C		125°C		
				min	max	min	max	min	max	
V _{IH}	HIGH level input voltage		1.2	0.9	-	0.9	-	0.9	-	V
			2.0	1.4	-	1.4	-	1.4	-	
			3.0	2.1	-	2.1	-	2.1	-	
			3.6	2.5	-	2.5	-	2.5	-	
V _{IL}	LOW level input voltage		1.2	-	0.3	-	0.3	-	0.3	V
			2.0	-	0.6	-	0.6	-	0.6	
			3.0	-	0.9	-	0.9	-	0.9	
			3.6	-	1.1	-	1.1	-	1.1	
V _{OH}	HIGH level output voltage	V _I = V _{IH} or V _{IL} I _O = -50 μA	1.2	1.1	-	1.0	-	1.0	-	V
			2.0	1.92	-	1.9	-	1.9	-	
			3.0	2.92	-	2.9	-	2.9	-	
			3.6	3.52	-	3.5	-	3.5	-	
		V _I = V _{IH} or V _{IL} I _O = -8 mA	3.0	2.48	-	2.34	-	2.20	-	V
V _{OL}	LOW level output voltage	V _I = V _{IH} or V _{IL} I _O = 50 μA	1.2	-	0.09	-	0.1	-	0.1	V
			2.0	-	0.09	-	0.1	-	0.1	
			3.0	-	0.09	-	0.1	-	0.1	
			3.6	-	0.09	-	0.09	-	0.09	
		V _I = V _{IH} or V _{IL} I _O = 8 mA	3.0	-	0.33	-	0.4	-	0.5	V
I _I	Input current	V _I = V _{CC} or 0 V	*	-	±0.1	-	±1.0	-	±1.0	μA
I _{OZ}	Three state leakage current	3-state outputs V _I (19) = V _{IH} V _O = V _{CC} or 0 V	1.2 *	-	±0.5	-	±5	-	±10	μA
I _{CC}	Supply current	V _I = V _{CC} or 0 V I _O = 0 μA	*	-	8.0	-	80	-	160	μA

* V_{CC} = 3.3 ± 0.3 V

AC ELECTRICAL CHARACTERISTICS ($C_L=50$ pF, $t_r=t_f=6.0$ ns, $R_L = 1$ k Ω)

Symbol	Parameter	Test conditions	V _{CC} V	Guaranteed Limit						Unit
				25°C		-40°C to 85°C		125°C		
				min	max	min	max	min	max	
t _{PHL} , t _{PLH}	Propagation delay , An to Bn, Bn to An	V _I = 0 V or V _{CC} Figure 1	1.2	-	100	-	125	-	140	ns
			2.0	-	23	-	28	-	34	
			*	-	14	-	18	-	21	
t _{PHZ} , t _{PLZ}	Propagation delay, OE, DIR to An, Bn	V _I = 0 V or V _{CC} Figure 2	1.2	-	120	-	140	-	160	ns
			2.0	-	30	-	37	-	43	
			*	-	20	-	24	-	28	
t _{PZH} , t _{PZL}	Propagation delay, OE to An, Bn	V _I = 0 V or V _{CC} Figure 2	1.2	-	120	-	140	-	160	ns
			2.0	-	28	-	35	-	43	
			*	-	17	-	21	-	26	
t _{THL} , t _{TLH}	Output Transition Time, Any Output	V _I = 0 V or V _{CC} Figure 1	1.2	-	60	-	75	-	90	ns
			2.0	-	16	-	20	-	24	
			*	-	10	-	13	-	15	
C _I	Input capacitance	For inputs 01,19	3.0	-	7.0	-	-	-	-	pF
C _{I/O}	Input/output capacitance	For inputs/ outputs 02-09, 11-18	3.0	-	20	-	-	-	-	pF
C _{PD}	Power dissipation capacitance (per one channel)	V _I = 0 V or V _{CC}		-	50	-	-	-	-	pF

* $V_{CC} = 3.3 \pm 0.3$ V

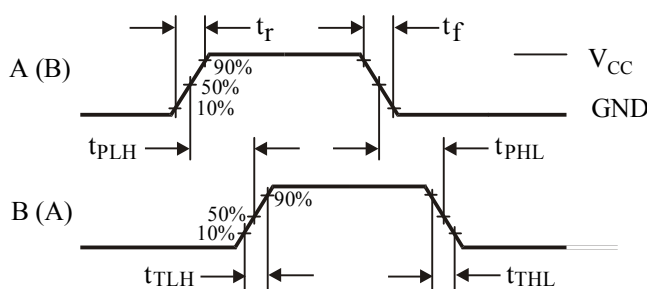


Figure 1. Switching Waveforms



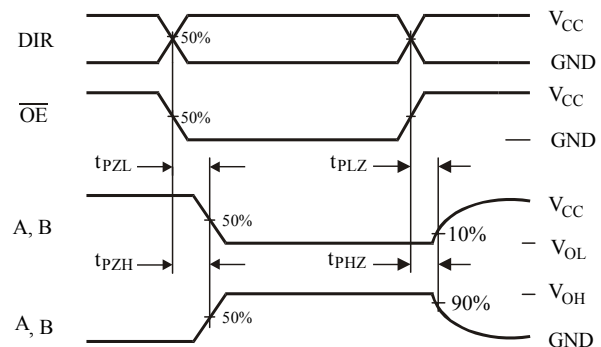


Figure 2. Switching Waveforms

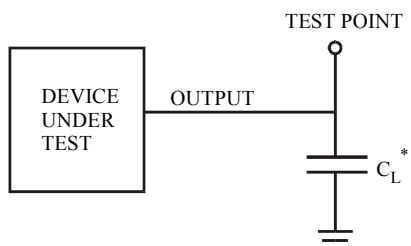

* Includes all probe and jig capacitance


Figure 3. Test Circuit

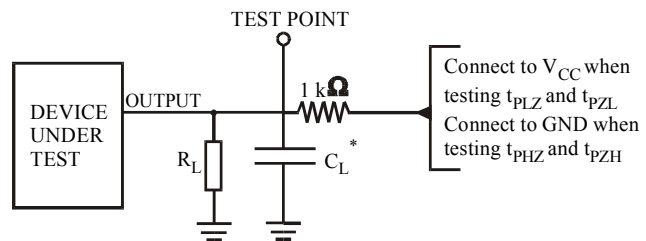



* Includes all probe and jig capacitance

Figure 4. Test Circuit

EXPANDED LOGIC DIAGRAM

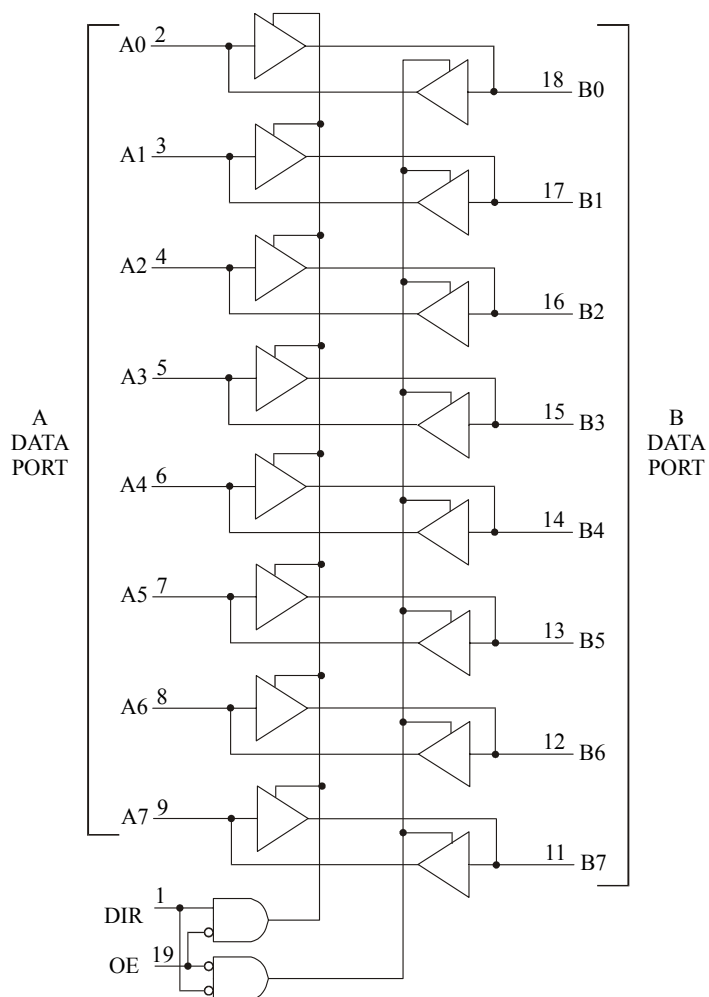

N SUFFIX PLASTIC DIP (MS - 001AD)

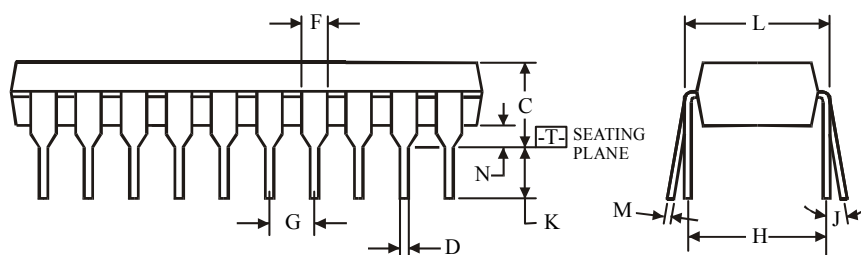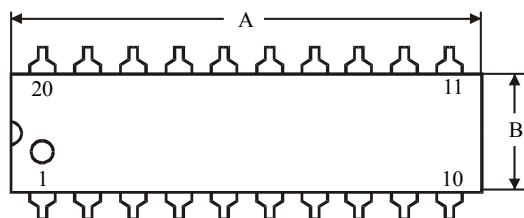


NOTES:

$\oplus 0.25 (0.010) \text{ (M) } T$



1. Dimensions "A", "B" do not include mold flash or protrusions.

Maximum mold flash or protrusions 0.25 mm (0.010) per side.



Dimension, mm		
Symbol	MIN	MAX
A	24.89	26.92
B	6.1	7.11
C		5.33
D	0.36	0.56
F	1.14	1.78
G	2.54	
H	7.62	
J	0°	10°
K	2.92	3.81
L	7.62	8.26
M	0.2	0.36
N	0.38	


D SUFFIX SOIC (MS - 013AC)

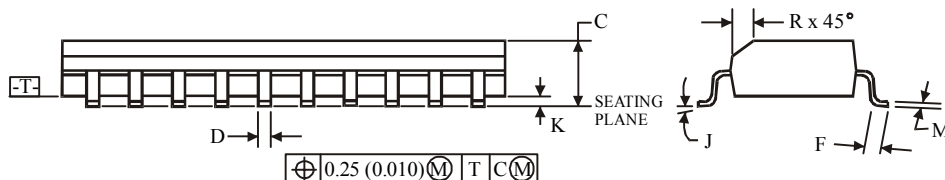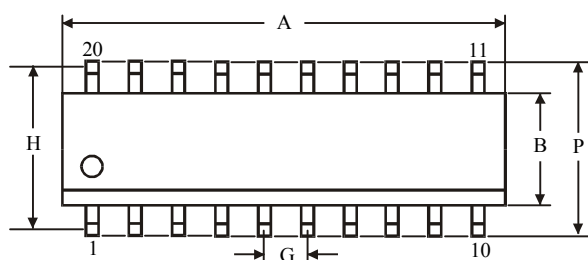

NOTES:

1. Dimensions A and B do not include mold flash or protrusion.

2. Maximum mold flash or protrusion 0.15 mm (0.006) per side
for A; for B - 0.25 mm (0.010) per side.



Dimension, mm		
Symbol	MIN	MAX
A	12.6	13
B	7.4	7.6
C	2.35	2.65
D	0.33	0.51
F	0.4	1.27
G	1.27	
H	9.53	
J	0°	8°
K	0.1	0.3
M	0.23	0.32
P	10	10.65
R	0.25	0.75