

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0014445307](#)
Status: **Active**
Overview: [cgrid_sl_products](#)
Description: 2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Male, Single Row, Version D, Back Ribs, for Wire Size 22, 0.38µm (15µ") Gold (Au), 7 Circuits

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)

[Product Specification PS-70400 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family Ribbon Cable / Wire Trap Connectors
Series [70475](#)
Comments Terminals Preloaded
Component Type Housing
Glow-Wire Compliant No
Overview [cgrid_sl_products](#)
Product Name SL™

Physical

Circuits (Loaded) 7
Durability (mating cycles max) 50
Entry Angle Vertical
Flammability 94V-0
Lock to Mating Part None
Number of Rows 1
PCB Retention None
Packaging Type Tube
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Polarized to Mating Part No
Stackable Yes
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -40°C to +105°C
Wire Insulation Diameter 1.35mm (.053") max.
Wire Size AWG 22
Wire/Cable Type Discrete Wire, Ribbon Cable

Electrical


Current - Maximum per Contact 3A
Voltage - Maximum 250V

Material Info

Old Part Number 70475-2351

Reference - Drawing Numbers

Product Specification PS-70400

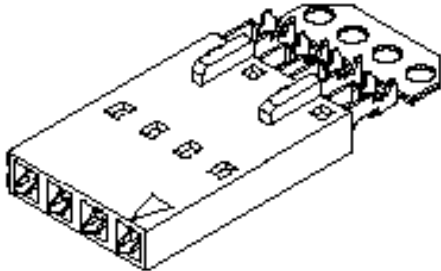

Series

image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[70475Series](#)

Mates With
[70004](#) Interim Clip (Single Row), [70013](#) Interim Clip (Dual Row)

Use With
[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

