4833.1200

4833, solder terminal, screened, 2-pole, Audio Plug/Sockets, 6.3 mm



Description

- Solder terminal :
  for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 2-pole , shielded , straight

References


Alternative: Housing insulated 4833.1210; 4833.1220

Technical Data

Diameter	6.3 mm
Number of Poles	2-pole
Ratings DC	1 A / 30 VDC
Ratings AC	1 A / 30 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 50 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal nickel-plated
Housings	screened
Style	straight
Lifetime	5000 Insertions

Dimensions

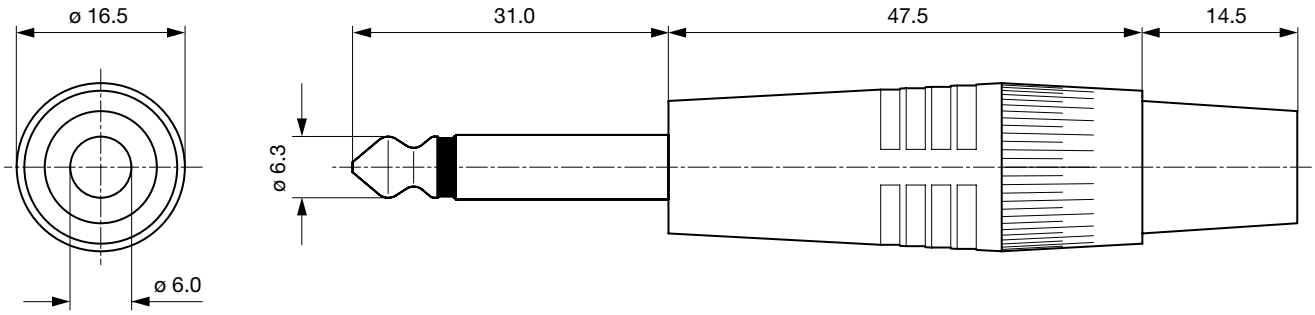

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	6.3	2-pole	solder terminal	4833.1200

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging unit 500 Pcs

Mating Outlets/Connectors



Category / Description

Audio Plug/Sockets Overview complete

4833, solder terminal, screened, 2-pole, Audio Plug/Sockets, 6.3 mm	4833.2200
4833, PCB terminals, screened, 2-pole, Audio Plug/Sockets, 6.3 mm	4833.2220
4833, PCB terminals, insulated, 2-pole, Audio Plug/Sockets, 6.3 mm	4833.2230
4833, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 6.3 mm	4833.3200

Audio Plug/Sockets further types to 4833.1200

28.10.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.