



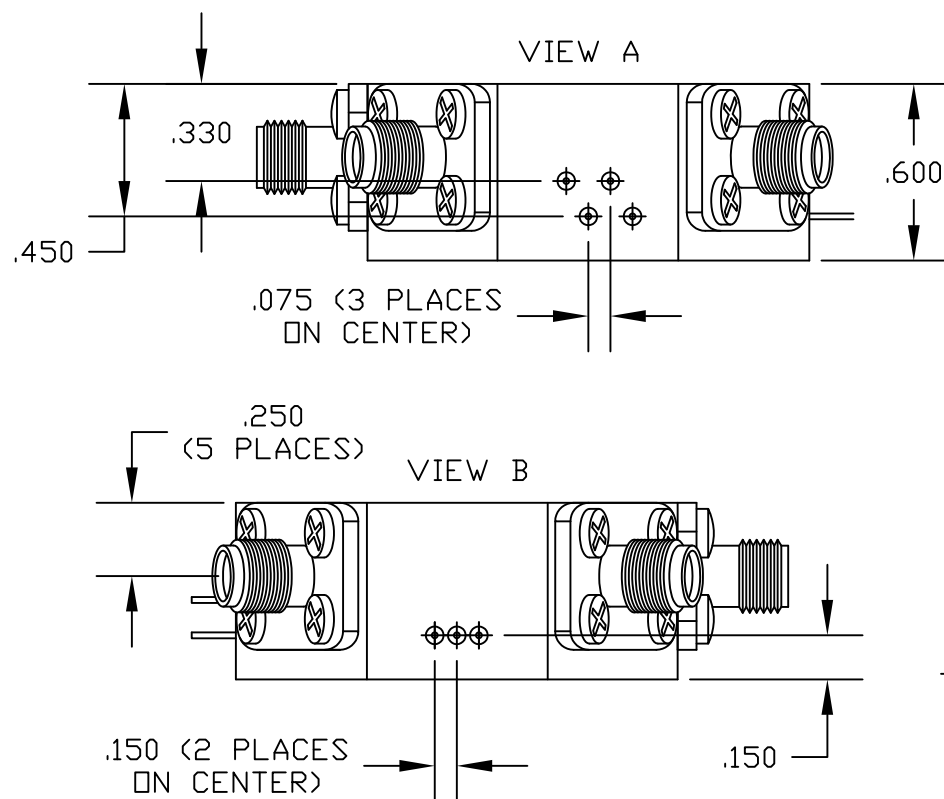

SPECIFICATIONS

FREQUENCY RANGE: 1 GHz-18 GHz
 DC BIAS: +5V±.5V @ 160mA MAXIMUM
 -15V±3V @ 50mA MAXIMUM
 INSERTION LOSS: 3.5 dB MAXIMUM
 VSWR: 2.0:1 MAXIMUM
 ISOLATION: 65 dB MINIMUM
 POWER WATTS: 0.5 MAXIMUM
 SWITCHING SPEED:
 SWITCH TYPE: SP4T
 CONTROLS:

TTL LOGIC 0: LOW LOSS
 TTL LOGIC 1: ISOLATION
 E1 CONTROLS: J2-J1
 E2 CONTROLS: J3-J1
 E3 CONTROLS: J4-J1
 E4 CONTROLS: J5-J1

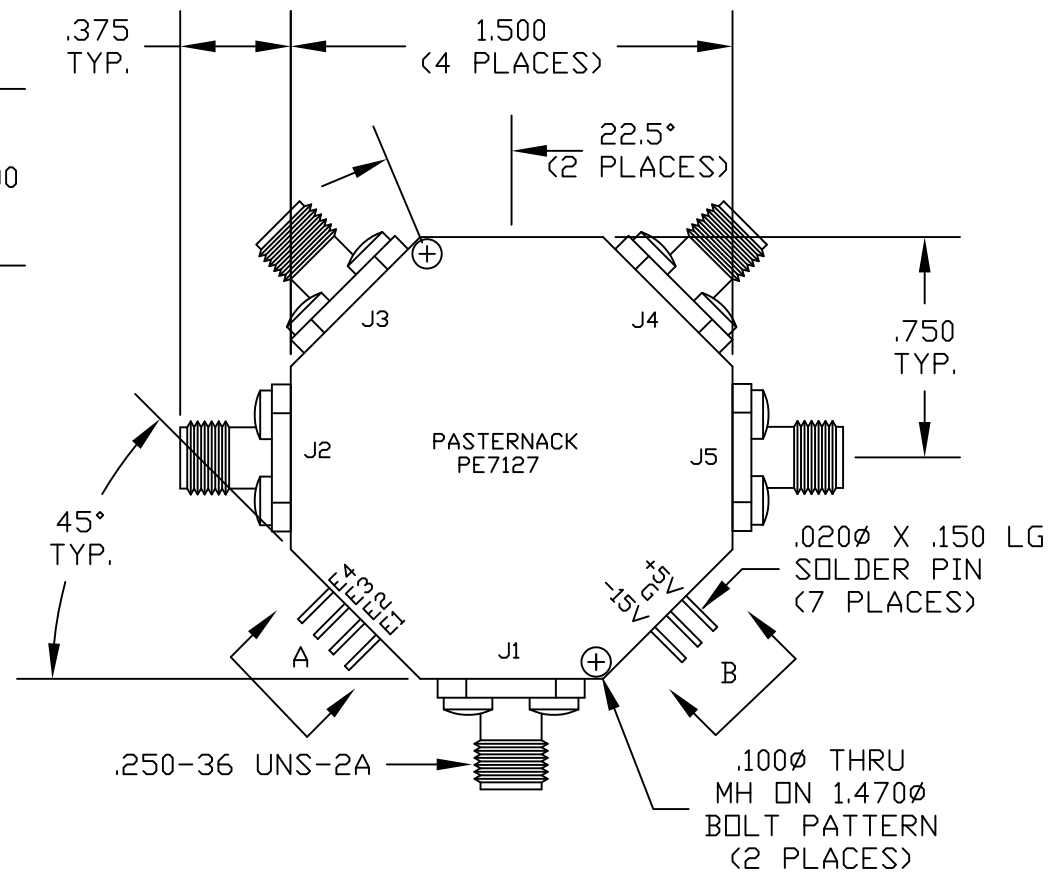

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE
PE7127

DES. SMA FEMALE, COAXIAL SWITCH FREQUENCY
 RANGE: 1 GHz TO 18 GHz SWITCH TYPE:
 SP4T

REV. A	FSCM NO. 53919	CAD FILE 02209	SCALE N/A	SIZE A	147
--------	----------------	----------------	-----------	--------	-----

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.