

SPECIFICATIONS

Rated(额定参数): 300V,1.5A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE		NOMINAL DIMENSION RANGE					
IN MM		IN MM					
OVER	OVER	OVER	OVER	OVER	OVER	OVER	OVER
TO	TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information

JL2EDGVC-XXX GX 1





Pitch
 500=5.00PH
 508=5.08PH

No. of pins
 2P~24P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 O=Be bog
 A=Troy
 T=Tube

Recommended P.C.B Layout(Top Side)

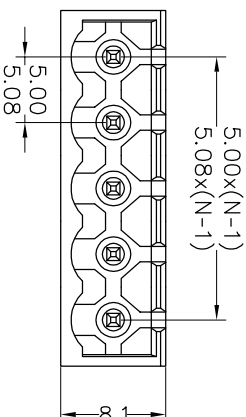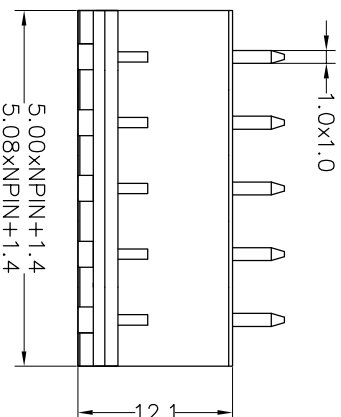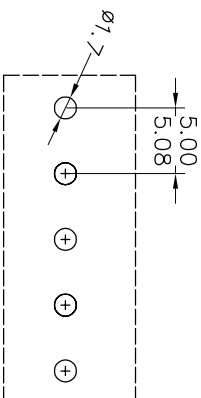

OPERATION		DRAW		SCALE		FIT		PART NO.	
XX	±0.30	yy	yusheng	UNIT	mm	1/1	A4	JL2EDGVC-500(508)XXGX1	
X:XX	±0.20	CHECK		SIZE		SHEET	1/1	5.00/5.08mm Pitch Male	
X:XXX	±0.10	APPROVE		PROU.		Pluggable Terminal Blocks			
Angle	±3°							TITLE:	
DIM	TOL							5.00/5.08mm Pitch Male	
CHANGE								Pluggable Terminal Blocks	
MODIFICATION DESCRIPTION								5.00/5.08mm Pitch Male	
NEW DRAWING								Pluggable Terminal Blocks	
DATE								5.00/5.08mm Pitch Male	
REV								Pluggable Terminal Blocks	

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992