

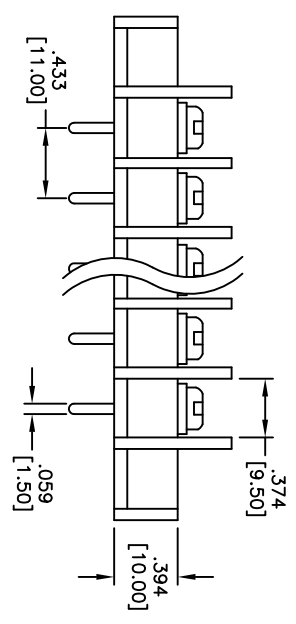


Rev	AWO #	Description	Date	Appr
-	11457	RELEASED	6/29/11	

APPROVED: _____
 DATE: _____ TITLE: _____

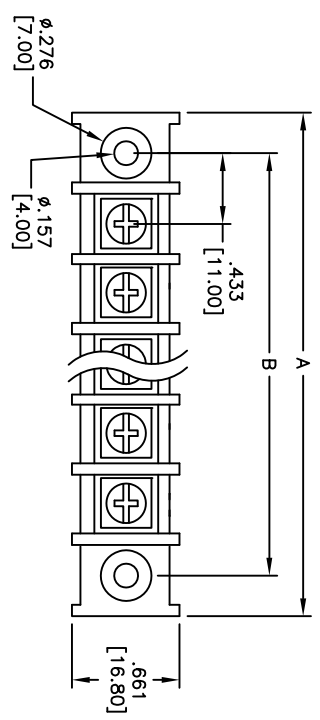

Poles: 2 thru 29
 A = .433 [11.00] x No. of Poles + .945 [24.00]
 B = .433 [11.00] x No. of Poles + .433 [11.00]

SPECIFICATIONS:
 Material: Nylon66, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass, Tin plated
 Screws: Steel, Nickel plated
 Electrical:
 Operating voltage: 300 VAC max.
 Current rating: 30 Amps max.
 Insulation resistance: 1000 Mohms min. @ DC 500V
 Insulation withstands voltage: 2,000 VAC for 1 minute
 Mechanical:
 Wire range: 22 - 14 AWG
 Temperature Rating:
 Operating temperature: -40°C to +120°C
 Environmental:
 Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: BARRIER STRIP, .433" [11.00] PITCH
 STRAIGHT, PCB THRU HOLE

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	TBN-XX-01-M	-
REF: S00031T	SCALE: NTS	SHEET 1 OF 1