

## Features

- Ideal for High Density Packaging
- High Isolation: 30 dB Min.
- VSWR: 1.3:1 Max.
- Impedance: 50 Ohms Nominal
- Maximum Power Rating or Input Power: 1 Watt Max.
- Internal Load Dissipation: 0.05 Watts Max.
- MIL-STD-883 Screening Available


## Description

A Power Divider is ideally a lossless reciprocal device which can also perform vector summation of two or more signals and thus is sometimes called a power combiner or summer.

## Pin Configuration

Pin No.	Function	Pin No.	Function
A	Out	C	Out
B	In		

## TO-5-1

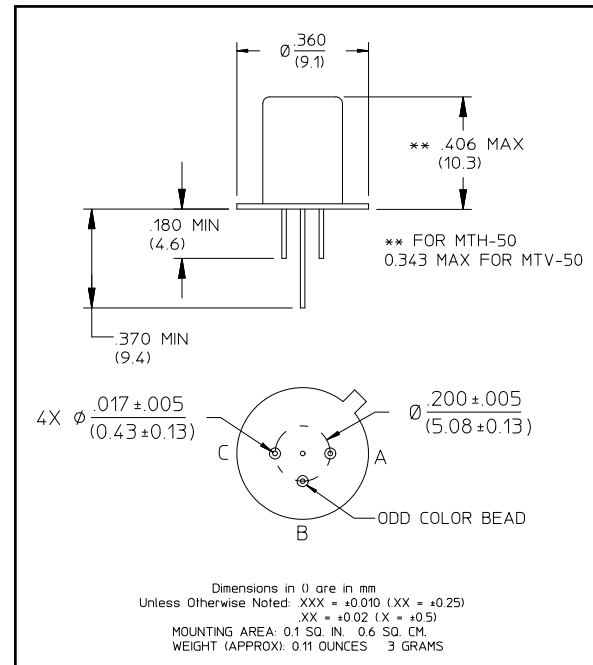

## MTH-50 Electrical Specifications<sup>1</sup>: $T_A = -55^\circ\text{C}$ to $+85^\circ\text{C}$




Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Frequency	—	1 - 100	MHz	—	—	—
Insertion Loss	Less Coupling	1 - 100 MHz	dB	—	—	0.5
Isolation	—	1 - 100 MHz	dB	30	—	—
Amplitude Balance	—	1 - 100 MHz	dB	—	—	0.1
Phase Balance	—	1 - 100 MHz	°	—	—	1.0
VSWR	—	1 - 100 MHz	Ratio	—	—	1.3:1

## MTV-50 Electrical Specifications<sup>1</sup>: $T_A = -55^\circ\text{C}$ to $+85^\circ\text{C}$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Frequency	—	40 - 400 MHz	MHz	—	—	—
Insertion Loss	Less Coupling	40 - 400 MHz	dB	—	—	0.6
Isolation	—	40 - 400 MHz	dB	30	—	—
Amplitude Balance	—	40 - 400 MHz	dB	—	—	0.2
Phase Balance	—	40 - 400 MHz	°	—	—	2.0
VSWR	—	40 - 400 MHz	Ratio	—	—	1.3:1

1. All specification apply with 50 ohm source and load impedance.

## Typical Performance Curves

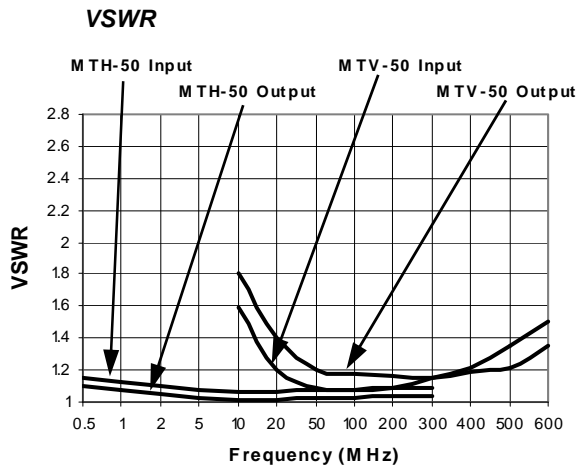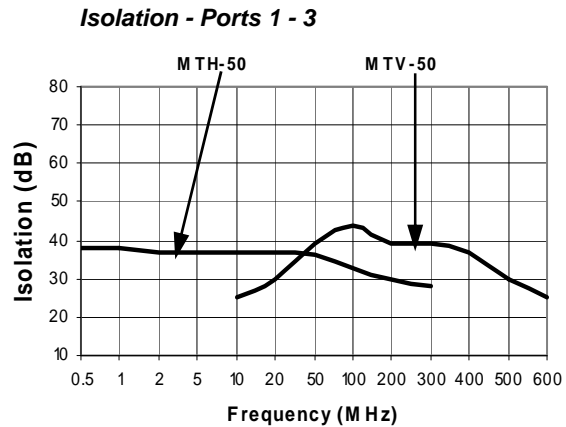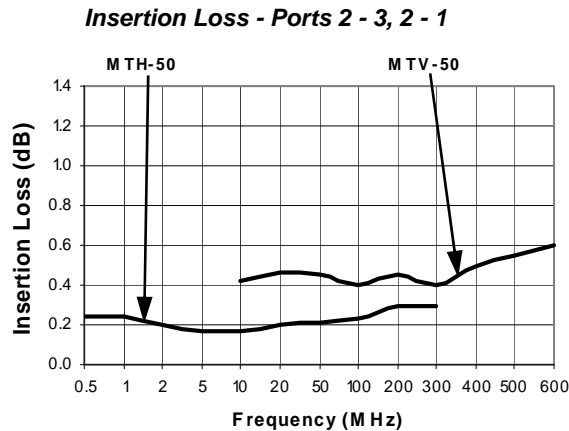

## Ordering Information

Part Number	Package
MTH-50 PIN	TO-5-1
MTV-50 PIN	TO-5-1