

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761451605

Status:


Active

Overview:

Impact™ Backplane Connectors and Cable Assemblies

Description:

Impact™ 100 Ohm 6 Pair Vertical Backplane Header, Unguided, Open Endwall, 16 Columns, 288 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.46mm, Lead-Free

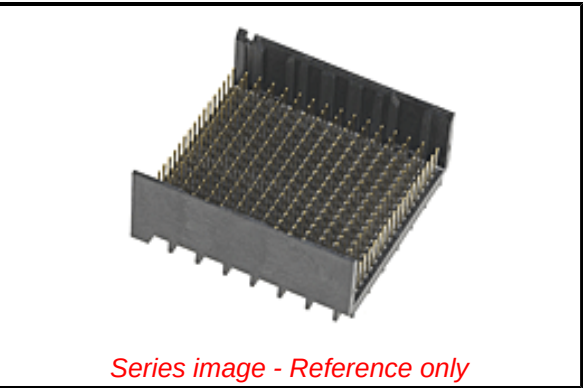

Series image - Reference only

Documents:	
3D Model	Application Specification AS-76060-990-001 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-7703 (PDF)
Product Specification PS-76060-999-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76145
Application	Conventional
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact™
UPC	883906402853
Physical	
Circuits (Loaded)	288
Circuits (maximum)	288
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.523/g
Number of Columns	16
Number of Pairs	6
Number of Rows	18
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/21/2016 (20 June 2016)	
Halogen-Free	
Status	
Low-Halogen	
Need more information on product environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

76145 Series

Mates With

76150 Impact™ 100 Ohm Daughtercard

Use With

75234 Backplane Free Standing Guide Pin

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Press-in-Tool for Daughter Card	0622018664
Signal Module, 6-	

Current - Maximum per Contact	0.75A	Pair by 16-Column Assemblies
Data Rate	25.0 Gbps	Backplane Insertion 0621005800
Impedance	100Ω	Tool for Signal Contact
Shield Type	N/A	Backplane Header 0621009610
Shielded	No	Removal Tool for GbX® U-Series, GbX I-Trac™, Impact™, or Z-PACK Tinman*
Voltage - Maximum	30V AC (RMS)/DC	Impact™ Backplane 0622018874
Material Info		Press-In Tool
Reference - Drawing Numbers		
Application Specification	AS-76060-990-001	
Packaging Specification	PK-70873-7703	
Product Specification	PS-76060-999-001	
Sales Drawing	SD-76145-001	
Symbol/Footprint Data	SYM-76145-1605	

This document was generated on 11/15/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION