



XR-85

SILICON EPITAXIAL PLANAR SWITCHING DIODE **REVERSE VOLTAGE: 20V** **FORWARD CURRENT: 100mA**


TECHNICAL SPECIFICATION

FEATURES

- Small glass structure ensures high reliability
- Low leakage
- High temperature soldering guaranteed:
250°C/10S/9.5mm lead length
at 5 lbs tension

MECHANICAL DATA

- Terminal: Plated axial leads solderable per
MIL-STD 202E, method 208C
- Case: Glass, hermetically sealed
- Polarity: Color band denotes cathode
- Mounting position: Any

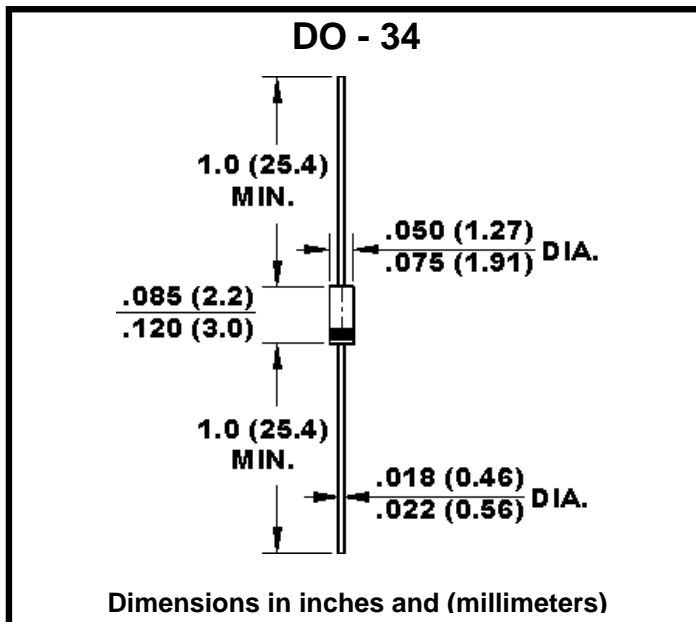

MAXIMUM RATINGS AND CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified)

RATINGS	SYMBOL	VALUE	UNITS
Reverse Voltage	V_R	20	V
Peak Reverse Voltage	V_{RM}	35	V
Forward Current (average)	I_O	100	mA
Forward Voltage ($I_F=10mA$)	V_F	1	V
Reverse Current ($V_R=20V$)	I_{R1}	100	nA
Reverse Current ($V_R=20V, T_J=100^\circ C$)	I_{R2}	10	μA
Capacitance (Note 1)	C_t	1.5	pF
Forward Differential Resistor ($I_F=10mA, f=100MHz$)	r_F	0.6	Ω
Thermal Resistance (junction to ambient) (Note 2)	$R_{\theta(ja)}$	0.35	$^\circ C/mW$
Operating Junction and Storage Temperature Range	T_{STG}, T_J	-55 ~ +150	$^\circ C$

Notes:

1: $V_R=10V, f=1 MHz$

2: Valid provided that leads are kept at ambient temperature at a distance of 8mm from case.