

环保物料

TEL:0769-82001899

NOTES:

**Voltage Rating:250V AC/DC**

Current Rating:3.0 AMP,AC/DC

Dielectric Withstand Voltage:500V,AC/Minute

Contact Voltage:20 mΩ Max





Insulation Voltage:1000 mΩ Min

Operation Temperature:-40°C to +105°C

Insulator Material:Polyester,UL94 V-0

Contact Material:Brass

Contact Plating: Au or Sn Plated on Nickel Overall

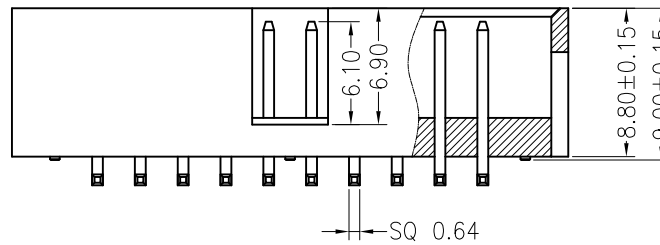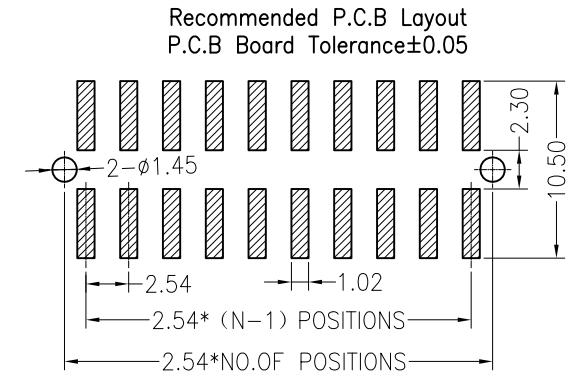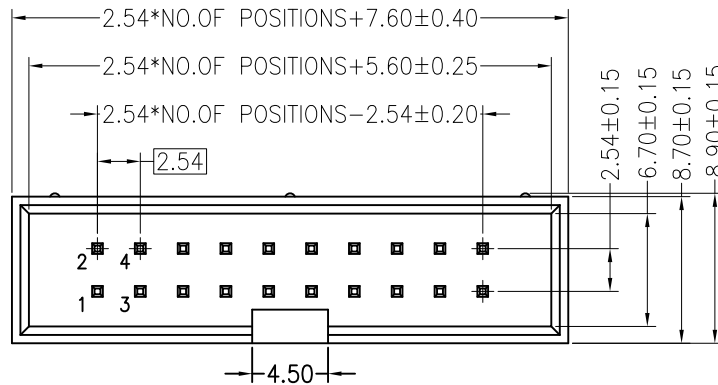

Dimension antitheses list

item	W	L
Standard	9.50	----
Alternate	----	----

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN

CK tan

CHKD

APPD

VIEW

CHKD

APPD

VIEW

VIEW

VIEW

**XFCN兴飞连接器有限公司**  
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME

**2.54mm Box Header Connectors**

PART. NO.

**BH254VS-XX**

SHEET

1/1

DATE

2010. 4. 12

UNITS

mm

SCALE

1:1

DWG. NO.

009

AO

VER

MODIFICATION

DRAW

DATE