


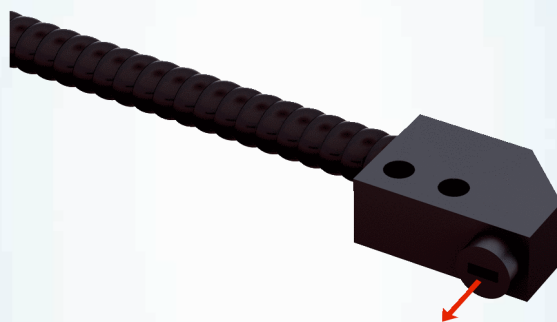

# LM38-750

LL3

FIBER-OPTIC SENSORS AND FIBERS

**SICK**  
Sensor Intelligence.




Illustration may differ

### Ordering information

| Type     | Part no. |
|----------|----------|
| LM38-750 | 2073503  |

Other models and accessories → [www.sick.com/LL3](http://www.sick.com/LL3)

### Detailed technical data

#### Features

|                                                            |                                  |
|------------------------------------------------------------|----------------------------------|
| <b>Device type</b>                                         | Fibers                           |
| <b>Detection principle</b>                                 | Through-beam system              |
| <b>For fiber-optic sensor</b>                              | GLL170(T), WLL180T               |
| <b>Fiber length</b>                                        | 750 mm                           |
| <b>Fiber material</b>                                      | Stone, ceramic, glass            |
| <b>Jacket material</b>                                     | Polyvinylchlorid (PVC)           |
| <b>Fiber head material</b>                                 | Chrome-plated metal coil         |
| <b>Outer diameter, fiber-optic cable connection</b>        | 2.2 mm                           |
| <b>Fiber-optic head design</b>                             | Flat type, 90° deflection        |
| <b>Fiber arrangement</b>                                   | Multi-fiber – linear arrangement |
| <b>Core structure</b>                                      | Multi-fiber – linear arrangement |
| <b>Bend radius, fibre-optic cable</b>                      | 20 mm                            |
| <b>Angle of dispersion &lt; 60°</b>                        | No                               |
| <b>Compatibility with infrared light (1,450 nm)</b>        | Yes                              |
| <b>Ambient operating temperature</b>                       | -10 °C ... +60 °C                |
| <b>Highly flexible/elastic fibers (bend radius 1–4 mm)</b> | No                               |
| <b>Adapter end sleeves required</b>                        | No                               |
| <b>Angle of dispersion</b>                                 | 60°                              |
| <b>Integrated lens</b>                                     | No                               |
| <b>Minimal object diameter</b>                             | 0.5 mm                           |
| <b>Compatibility tip adapters</b>                          | No                               |

#### Classifications

|                     |          |
|---------------------|----------|
| <b>ECl@ss 5.0</b>   | 27270905 |
| <b>ECl@ss 5.1.4</b> | 27270905 |
| <b>ECl@ss 6.0</b>   | 27270905 |
| <b>ECl@ss 6.2</b>   | 27270905 |
| <b>ECl@ss 7.0</b>   | 27270905 |
| <b>ECl@ss 8.0</b>   | 27270905 |
| <b>ECl@ss 8.1</b>   | 27270905 |

|                       |          |
|-----------------------|----------|
| <b>ECI@ss 9.0</b>     | 27270905 |
| <b>ETIM 5.0</b>       | EC002651 |
| <b>ETIM 6.0</b>       | EC002651 |
| <b>UNSPSC 16.0901</b> | 39121528 |

#### Sensing ranges with WLL180T

|                              |          |
|------------------------------|----------|
| <b>Operating mode 16 µs</b>  | 100 mm   |
| <b>Operating mode 70 µs</b>  | 330 mm   |
| <b>Operating mode 250 µs</b> | 650 mm   |
| <b>Operating mode 2 ms</b>   | 1,300 mm |
| <b>Operating mode 8 ms</b>   | 1,350 mm |

#### Sensing ranges with GLL170


|                              |        |
|------------------------------|--------|
| <b>Operating mode 250 µs</b> | 325 mm |
|------------------------------|--------|

#### Sensing ranges with GLL170T

|                              |        |
|------------------------------|--------|
| <b>Operating mode 50 µs</b>  | 592 mm |
| <b>Operating mode 250 µs</b> | 992 mm |

#### Dimensional drawing (Dimensions in mm (inch))

LL3-LM38750

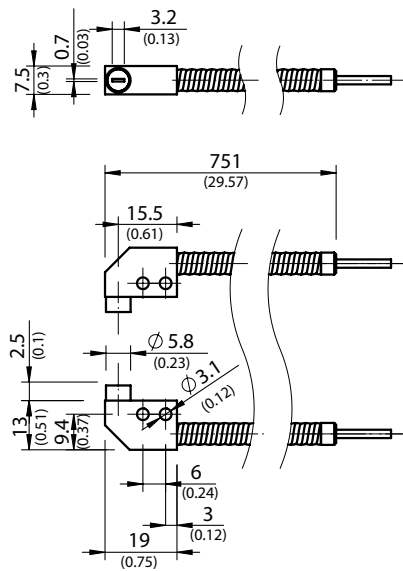

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)