P-Channel Super Trench Power MOSFET

Description


The HMS90P03D uses **Super Trench** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g. This device is ideal for high-frequency switching and synchronous rectification.

General Features


- V_{DS} =-30V,I_D =-90A
  $R_{DS(ON)}$=5.1mΩ (typical) @ V_{GS}=-10V
  $R_{DS(ON)}$=7.4mΩ (typical) @ V_{GS}=-4.5V
- Excellent gate charge x $R_{DS(on)}$ product(FOM)
- Very low on-resistance $R_{DS(on)}$
- 150 °C operating temperature
- Pb-free lead plating
- 100% UIS tested

Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification



Schematic Diagram

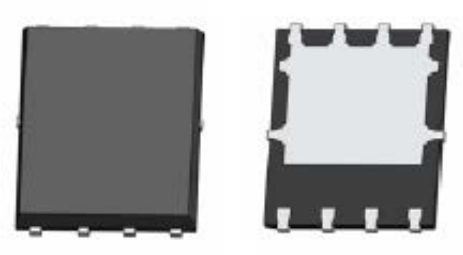

Top View **Bottom View**

100% UIS TESTED!

100% ΔVds TESTED!

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
HMS90P03D	HMS90P03D	DFN5X6-8L	-	-	-

Absolute Maximum Ratings (T_C=25℃unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	±20	V
Drain Current-Continuous	I_D	-90	A
Drain Current-Continuous(T_C=100℃)	I_D (100℃)	-63.6	A
Pulsed Drain Current	I_{DM}	-300	A
Maximum Power Dissipation	P_D	75	W
Derating factor		0.6	W/℃
Single pulse avalanche energy (Note 5)	E_{AS}	500	mJ
Operating Junction and Storage Temperature Range	T_J,T_{STG}	-55 To 150	℃

Thermal Characteristic

Thermal Resistance,Junction-to-Case (Note 2)	$R_{\theta JC}$	1.0	℃/W

Electrical Characteristics (T_C=25℃unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=-250μA	-30		-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=-30V,V_{GS}=0V	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=-250μA	-1.0	-1.5	-2.2	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=-10V, I_D=-20A	-	5.1	5.6	mΩ
		V_{GS}=-4.5V, I_D=-20A	-	7.4	8.0	mΩ
Forward Transconductance	g_{FS}	V_{DS}=-5V,I_D=-20A	-	30	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C_{lss}	V_{DS}=-15V,V_{GS}=0V, F=1.0MHz	-	3914	-	PF
Output Capacitance	C_{oss}		-	1263	-	PF
Reverse Transfer Capacitance	C_{rss}		-	50	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=-15V,I_D=-20A V_{GS}=-10V,R_G=1.6Ω	-	10.5	-	nS
Turn-on Rise Time	t_r		-	9	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	40	-	nS
Turn-Off Fall Time	t_f		-	10	-	nS
Total Gate Charge	Q_g	V_{DS}=-15V,I_D=-20A, V_{GS}=-10V	-	52	-	nC
Gate-Source Charge	Q_{gs}		-	9.6		nC
Gate-Drain Charge	Q_{gd}		-	7.0		nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	V_{GS}=0V,I_S=-20A	-		-1.2	V
Diode Forward Current (Note 2)	I_S		-	-	-90	A
Reverse Recovery Time	t_{rr}	T_J = 25°C, I_F =-20A di/dt = 100A/μs (Note3)	-		24	nS
Reverse Recovery Charge	Qrr		-		68	nC

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec.
3. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
4. Guaranteed by design, not subject to production
5. EAS condition : Tj=25℃,V_{DD}=-20V,V_G=-10V,L=0.5mH,Rg=25Ω

Typical Electrical and Thermal Characteristics

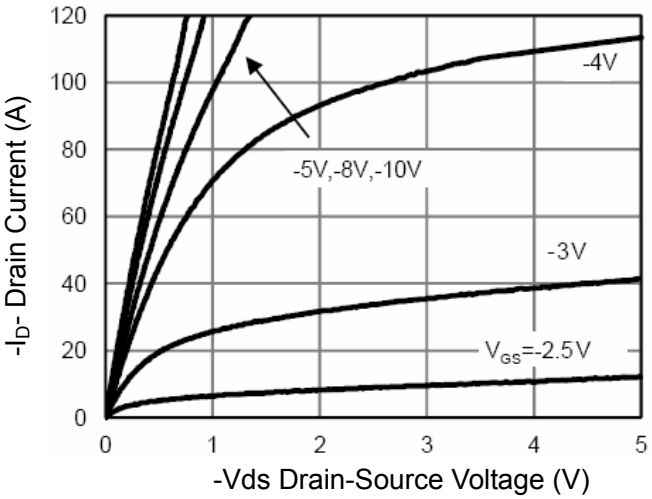


Figure 1 Output Characteristics

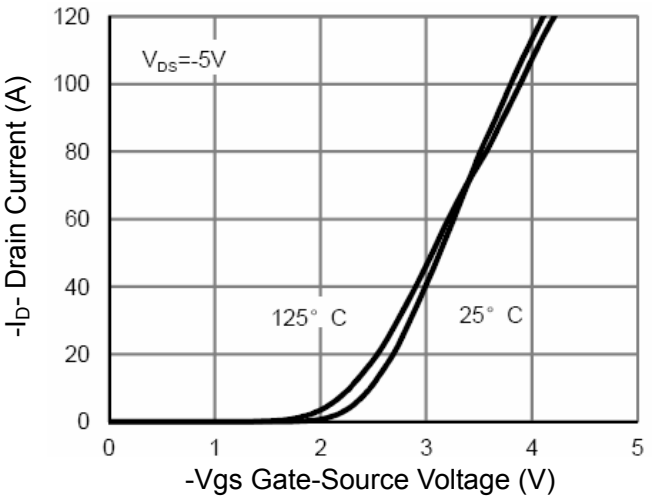


Figure 2 Transfer Characteristics

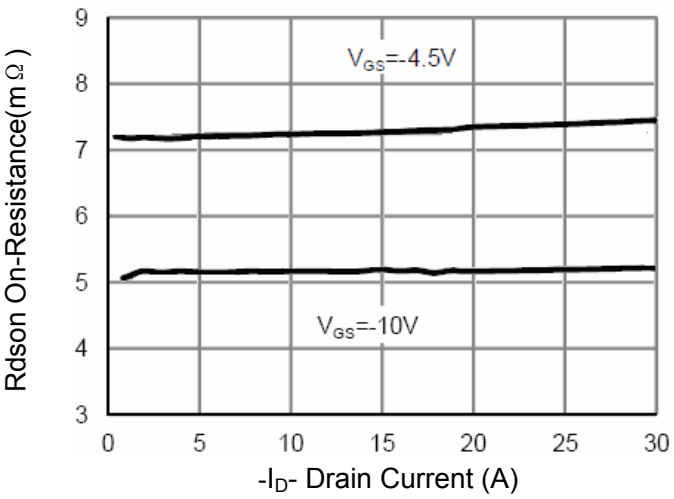


Figure 3 Rdson- Drain Current

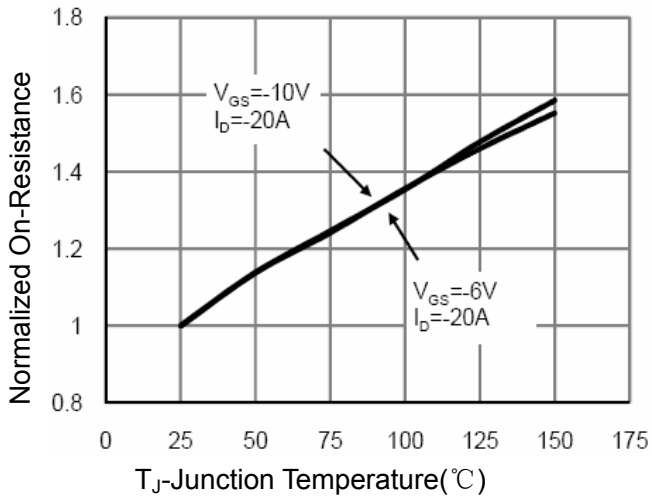


Figure 4 Rdson-JunctionTemperature

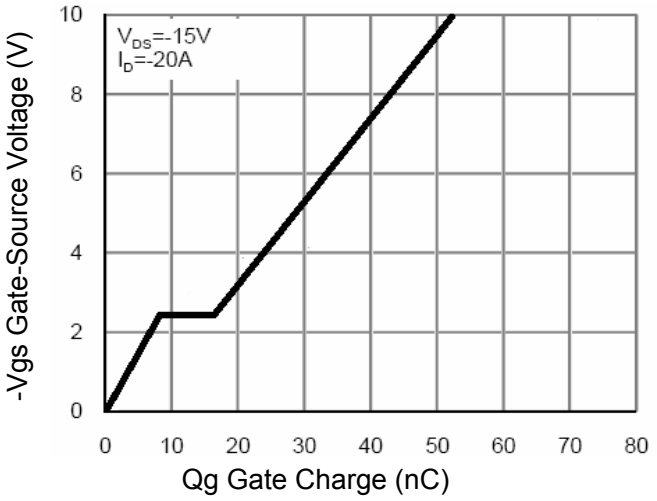


Figure 5 Gate Charge

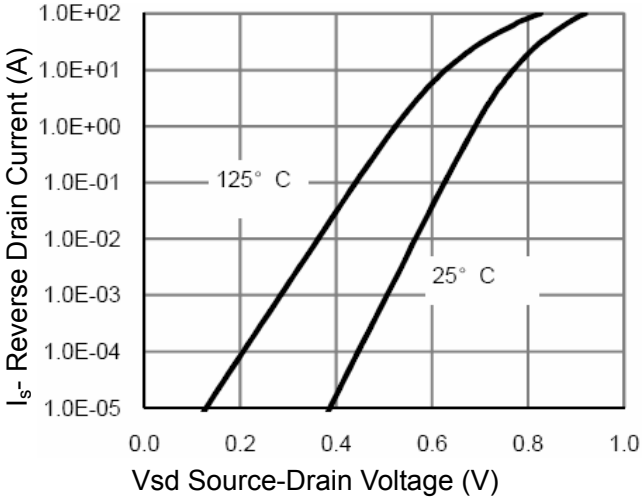


Figure 6 Source- Drain Diode Forward

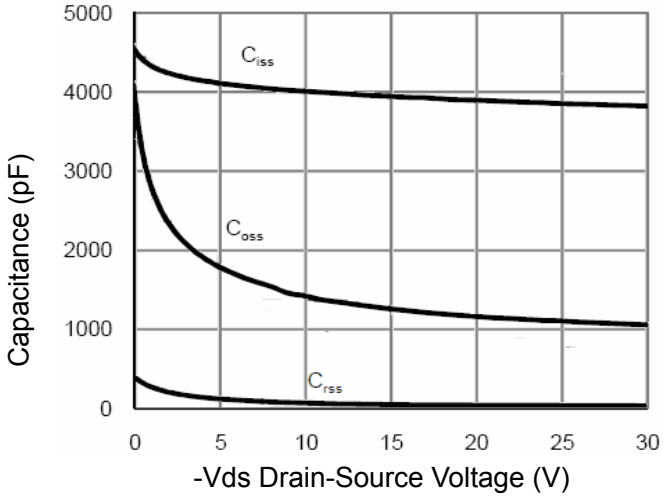


Figure 7 Capacitance vs Vds

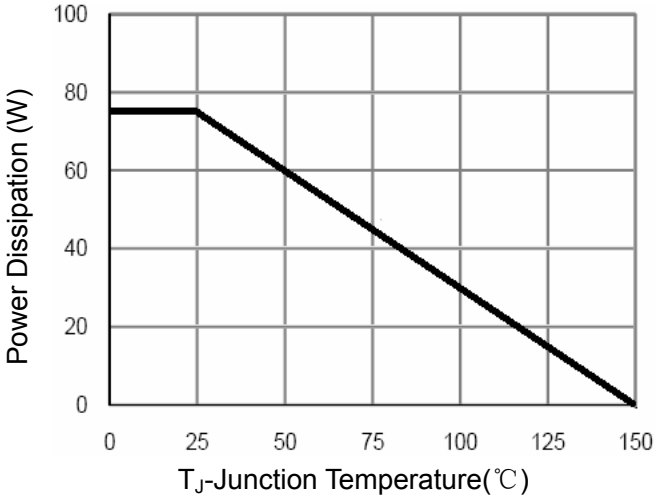


Figure 9 Power De-rating

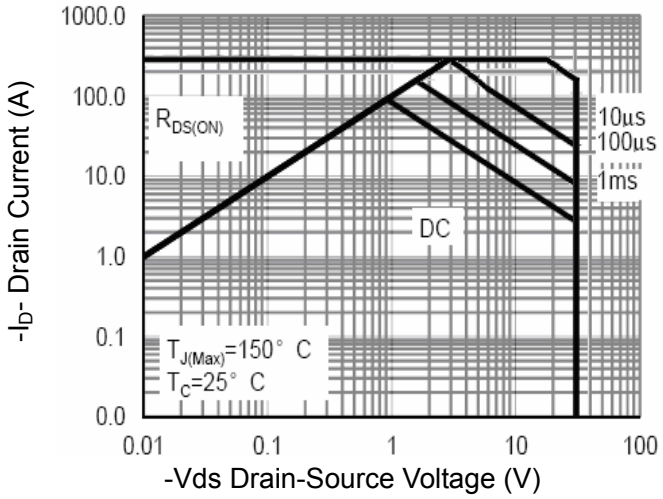


Figure 8 Safe Operation Area

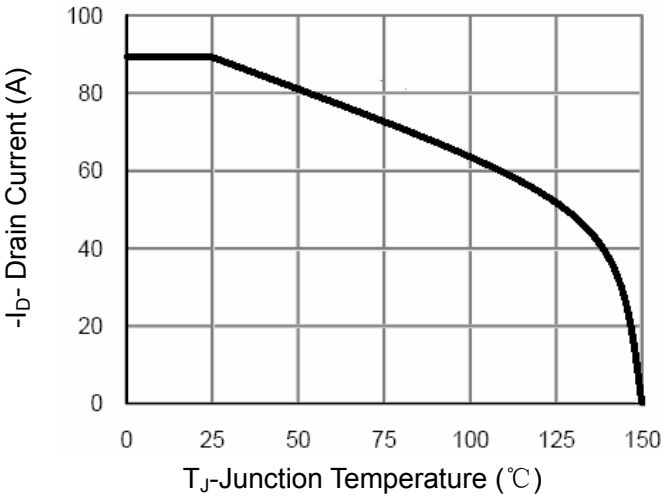


Figure 10 Current De-rating



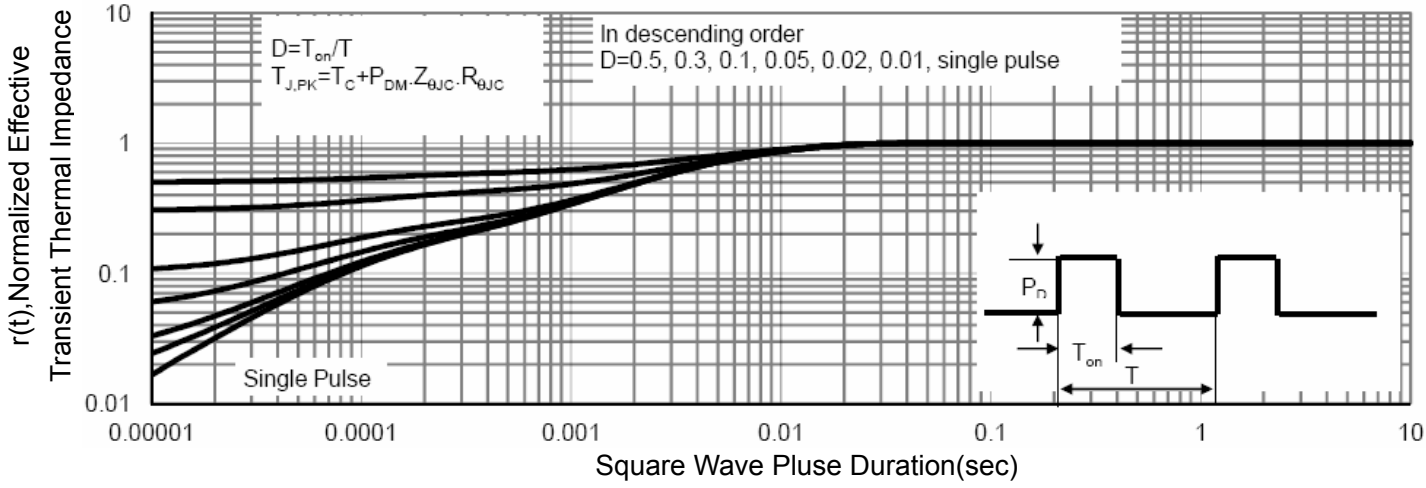


Figure 11 Normalized Maximum Transient Thermal Impedance


DFN5X6-8L Package Information

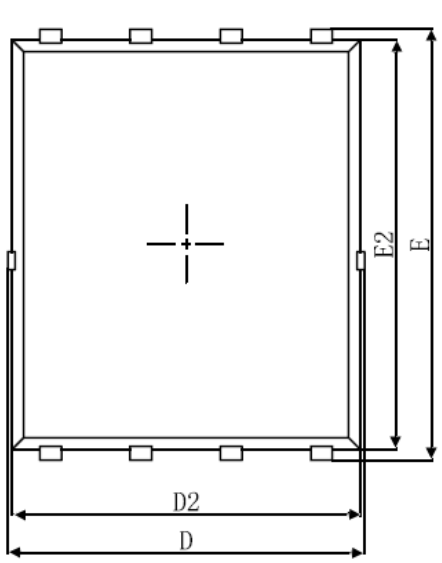

Top View
[顶视图]

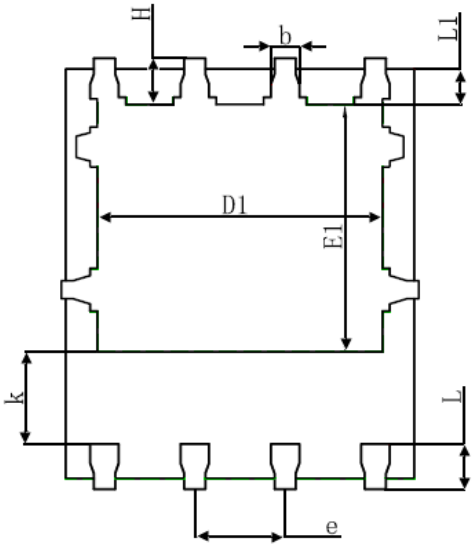

Bottom View
[背视图]

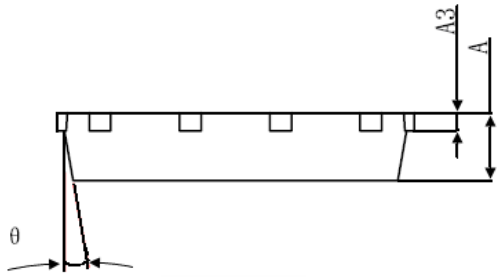

Side View
[侧视图]

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.000	0.035	0.039
A3	0.254REF.		0.010REF.	
D	4.944	5.096	0.195	0.201
E	5.974	6.126	0.235	0.241
D1	3.910	4.110	0.154	0.162
E1	3.375	3.575	0.133	0.141
D2	4.824	4.976	0.190	0.196
E2	5.674	5.826	0.223	0.229
k	1.190	1.390	0.047	0.055
b	0.350	0.450	0.014	0.018
e	1.270TYP.		0.050TYP.	
L	0.559	0.711	0.022	0.028
L1	0.424	0.576	0.017	0.023
H	0.574	0.726	0.023	0.029
θ	8°	12°	8°	12°