


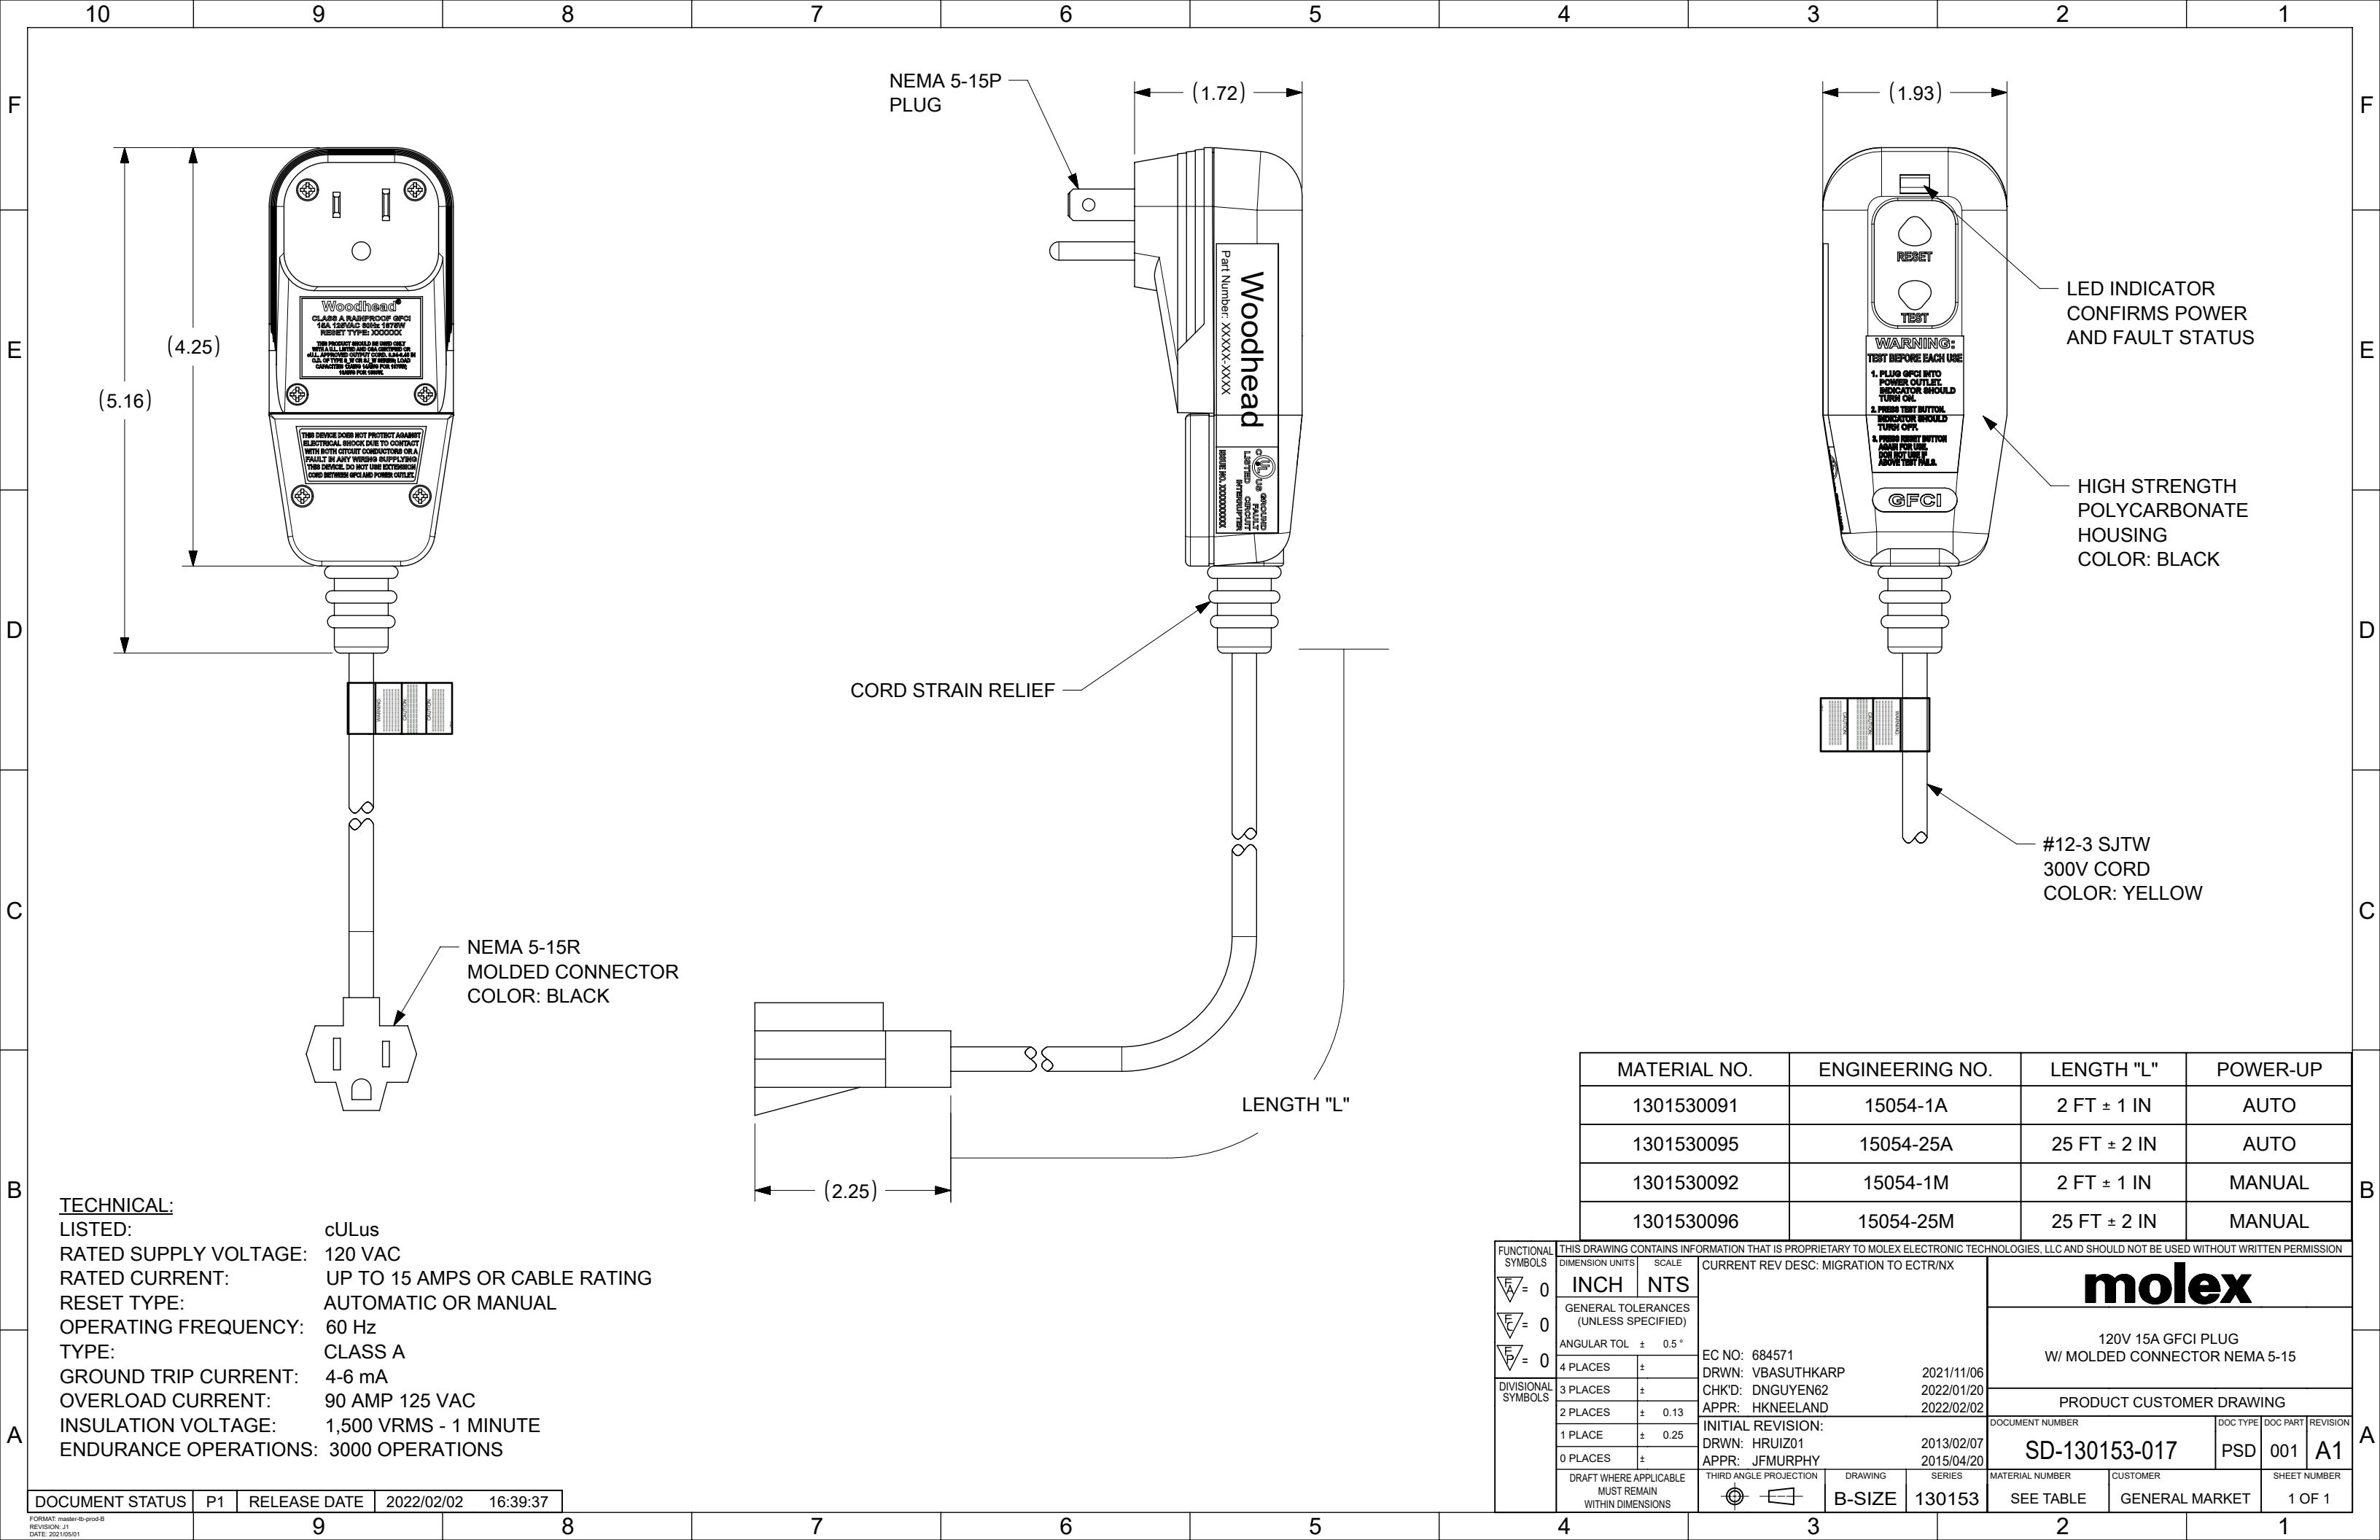

TECHNICAL:

LISTED: cULus
RATED SUPPLY VOLTAGE: 120 VAC
RATED CURRENT: UP TO 15 AMPS OR CABLE RATING
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP
1301530091	15054-1A	2 FT ± 1 IN	AUTO
1301530095	15054-25A	25 FT ± 2 IN	AUTO
1301530092	15054-1M	2 FT ± 1 IN	MANUAL
1301530096	15054-25M	25 FT ± 2 IN	MANUAL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX				molex 120V 15A GFCI PLUG W/ MOLDED CONNECTOR NEMA 5-15			
	INCH		NTS									
	GENERAL TOLERANCES (UNLESS SPECIFIED)											
	ANGULAR TOL ± 0.5°											
	4 PLACES		±									
DIVISIONAL SYMBOLS	3 PLACES		±		DRWN: VBASUTHKARP 2021/11/06							
	2 PLACES		± 0.13		CHK'D: DNGUYEN62 2022/01/20							
	1 PLACE		± 0.25		APPR: HKNEELAND 2022/02/02							
	0 PLACES		±		INITIAL REVISION:							
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				DRWN: HRUIZ01 2013/02/07							
					APPR: JFMURPHY 2015/04/20							
					THIRD ANGLE PROJECTION							
DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION		
B-SIZE		130153		SD-130153-017		PSD		001		A1		
SEE TABLE		GENERAL MARKET		SHEET NUMBER		1 OF 1						

DOCUMENT STATUS	P1	RELEASE DATE	2022/02/02	16:39:37
-----------------	----	--------------	------------	----------