


SHEET 1 OF 1





▲ CIRCUIT: SPST

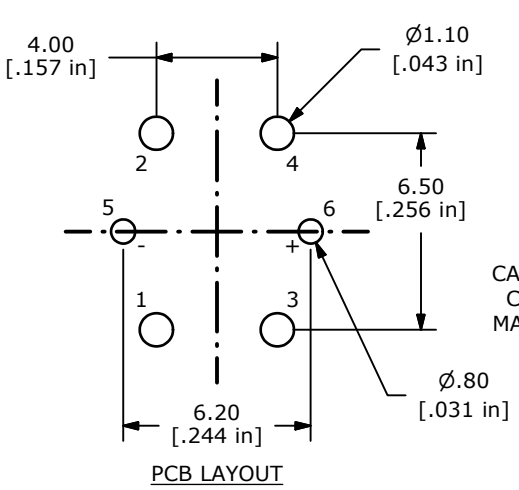

PCB LAYOUT

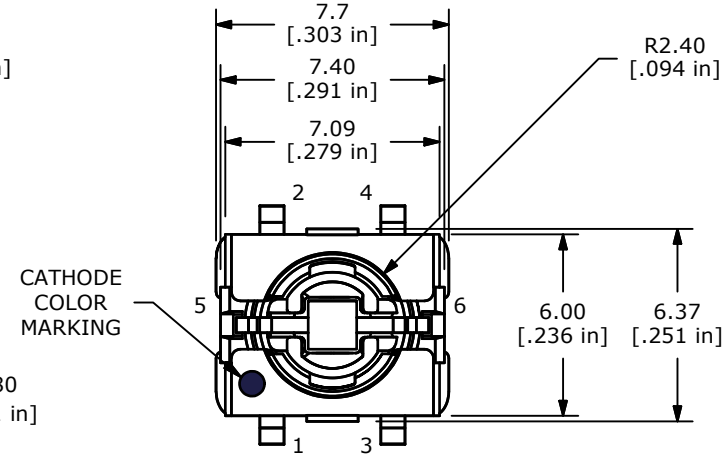

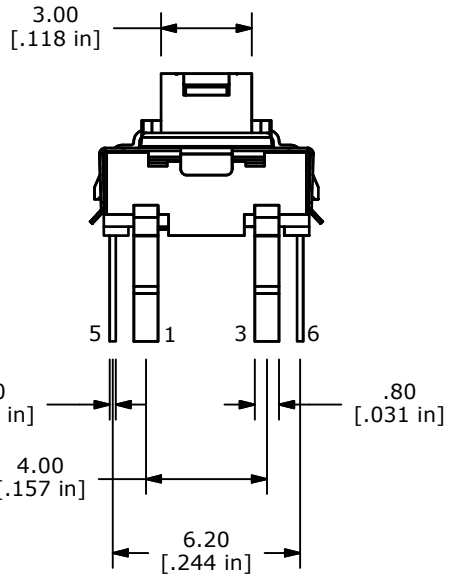

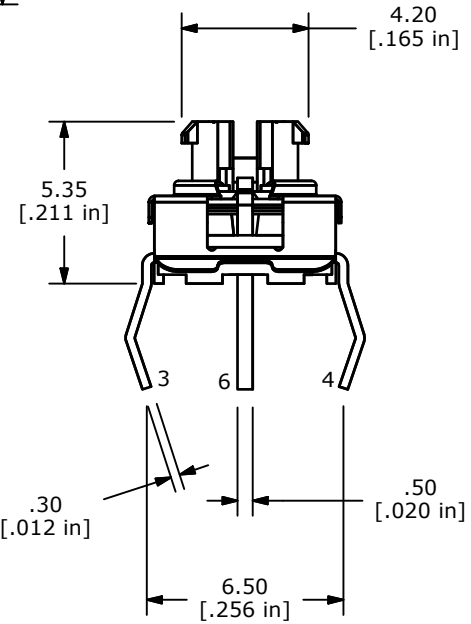

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC.
▲ 6. OPERATING FORCE: 450 ± 150gf
7. TRAVEL: 0.45+/-0.15mm
8. OPERATING TEMPURATURE: -20˚C TO 70˚C
9. OPEREATING LIFE: 500,000 CYCLES
10. LED COLOR: GREEN
11. IP67 RATED
12. ▲DENOTES CRITICAL PARAMETERS
13. 2002/95/EC (ROHS) COMPLIANT

▲ LED Specifications			
LED Color	Forward Current (mA)	Forward Voltage (V @ 20mA)	Luminous Intensity (mcd)
GREEN	20	2.1 typ - 2.5 max	50 typ

REV	PCR NO	DESCRIPTION	DATE	BY
A	21758	New Release	1/9/15	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL6215VF450GNN

SCALE	DATE	DR	DWG	REV
4:1	1/9/2015	rc	B200602	A