

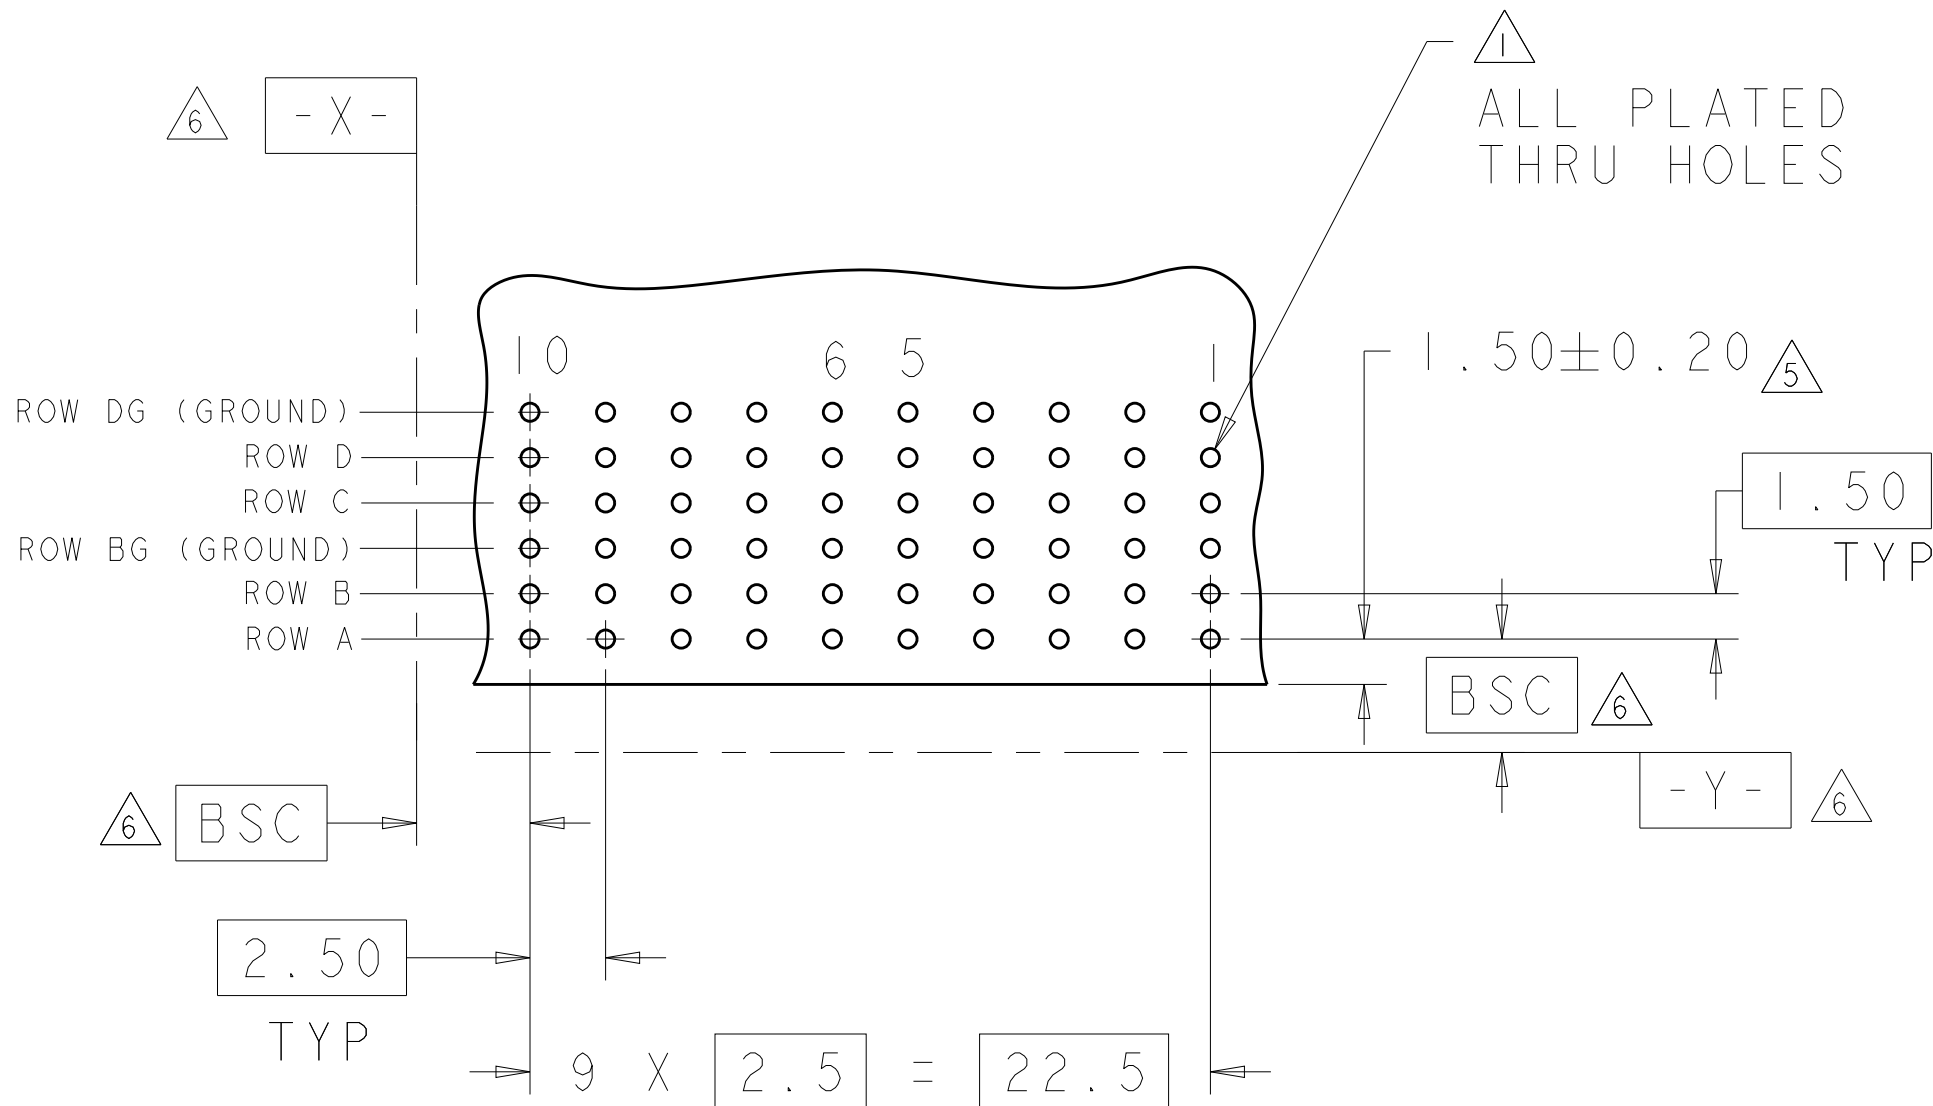


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECO-14-005095	11APR2014	AP	RP
F		REVISED PER ECO-16-008845	24SEP2016	AP	RP


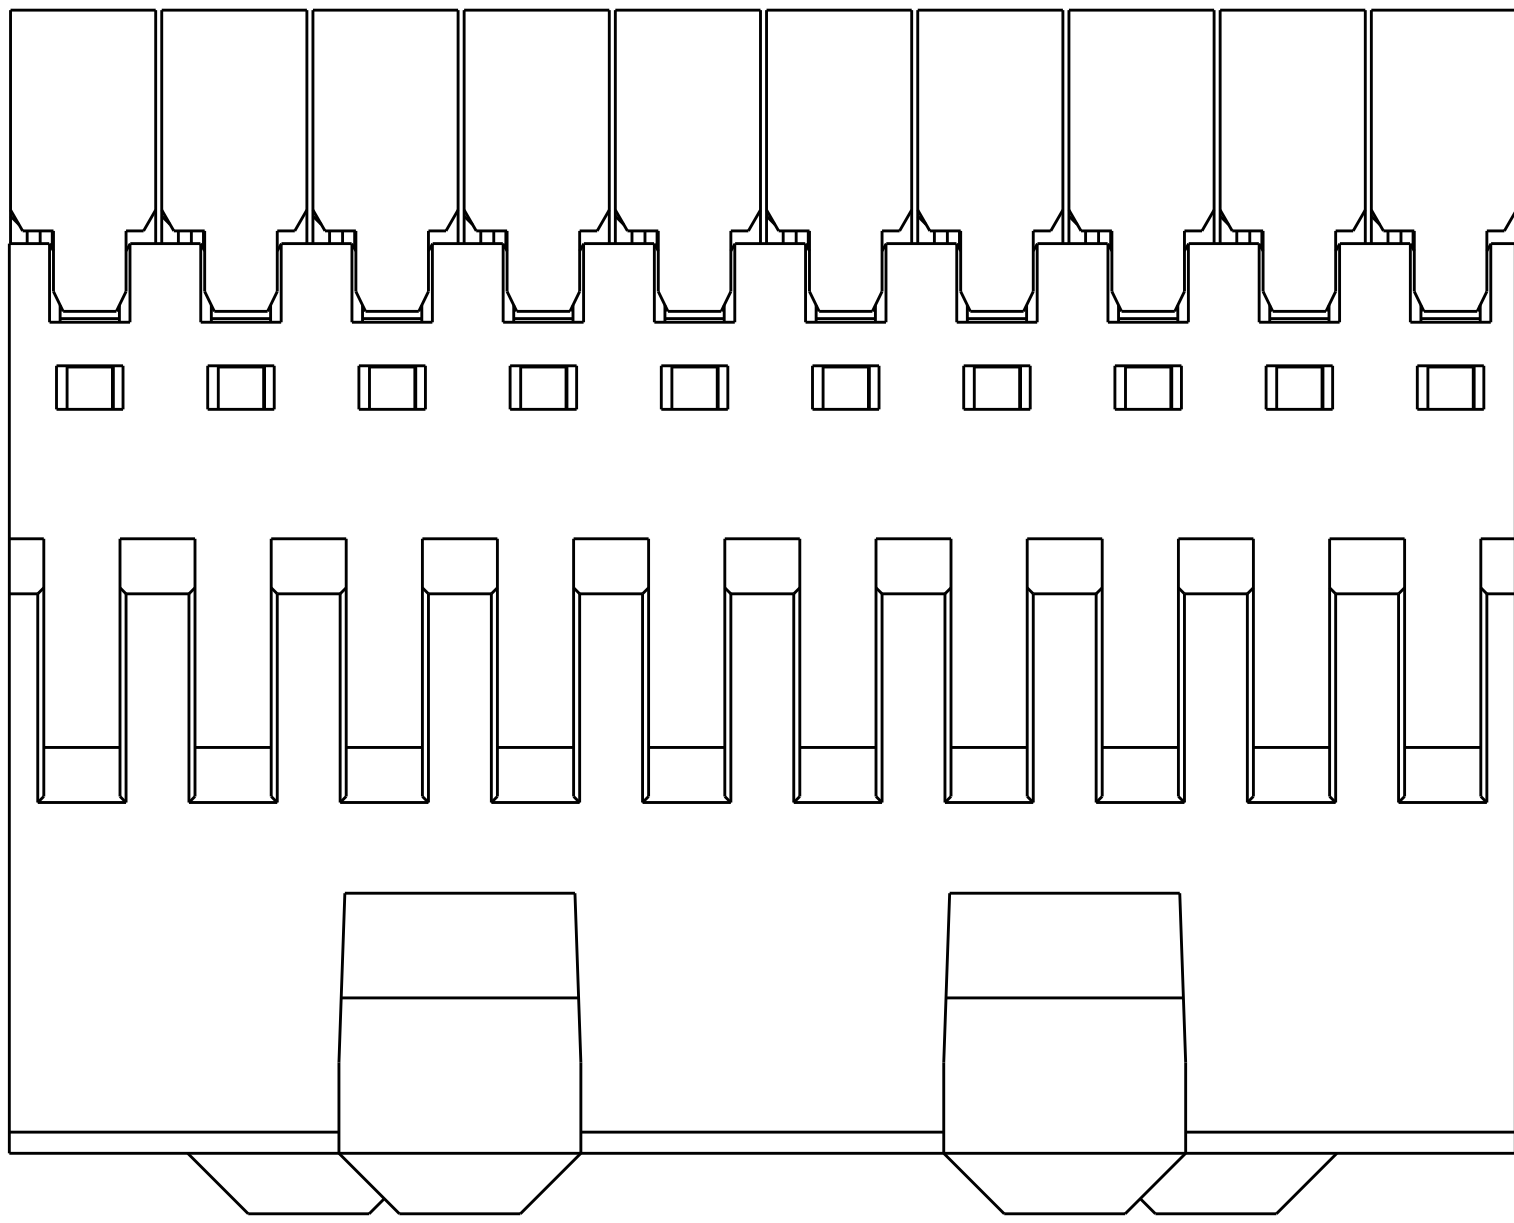


RECOMMENDED PC BOARD LAYOUT,
DAUGHTER BOARD,
COMPONENT SIDE SHOWN
SCALE 4:1

- REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0 RATED.
- FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

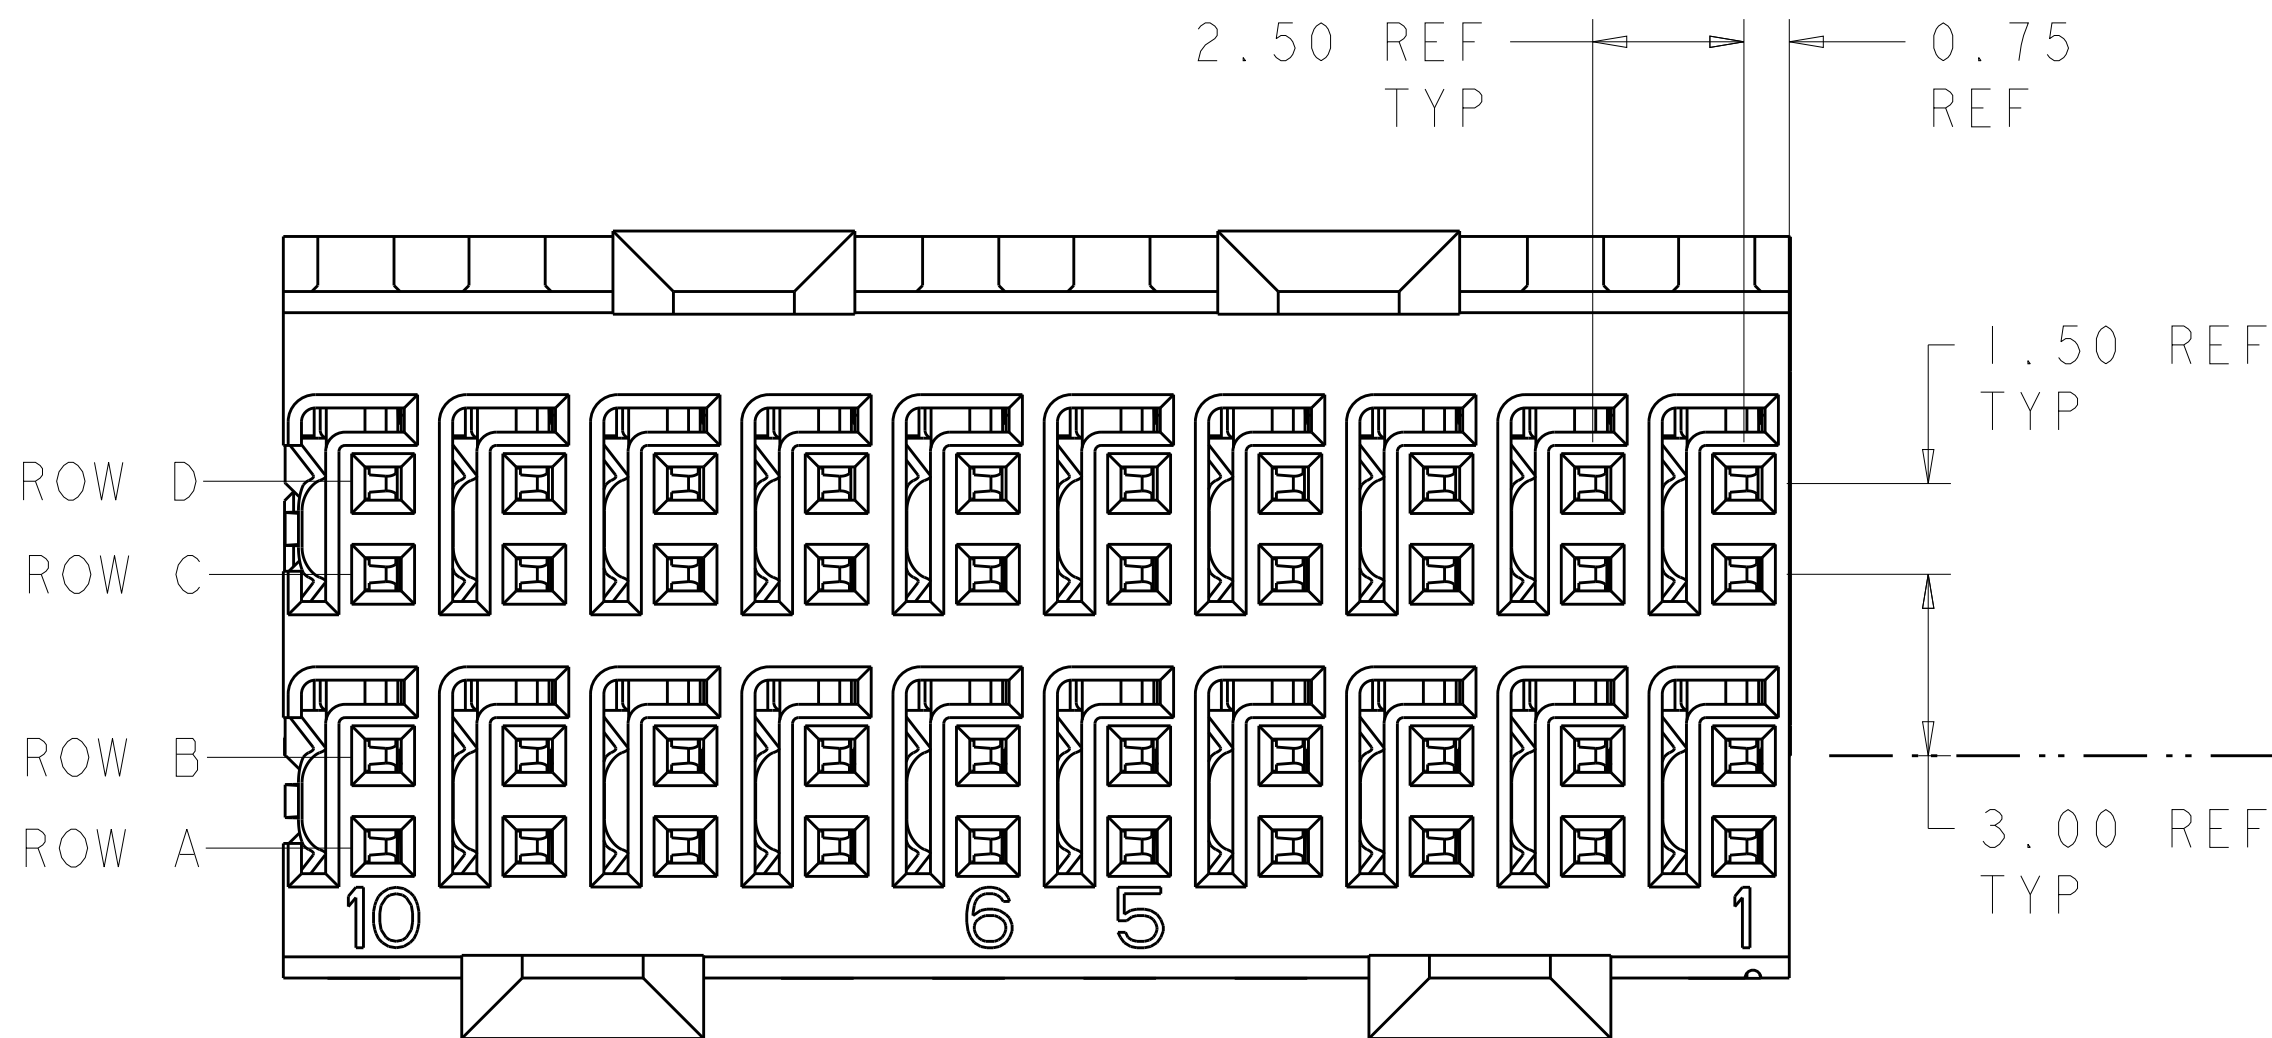

TOP SURFACE OF
DAUGHTER CARD

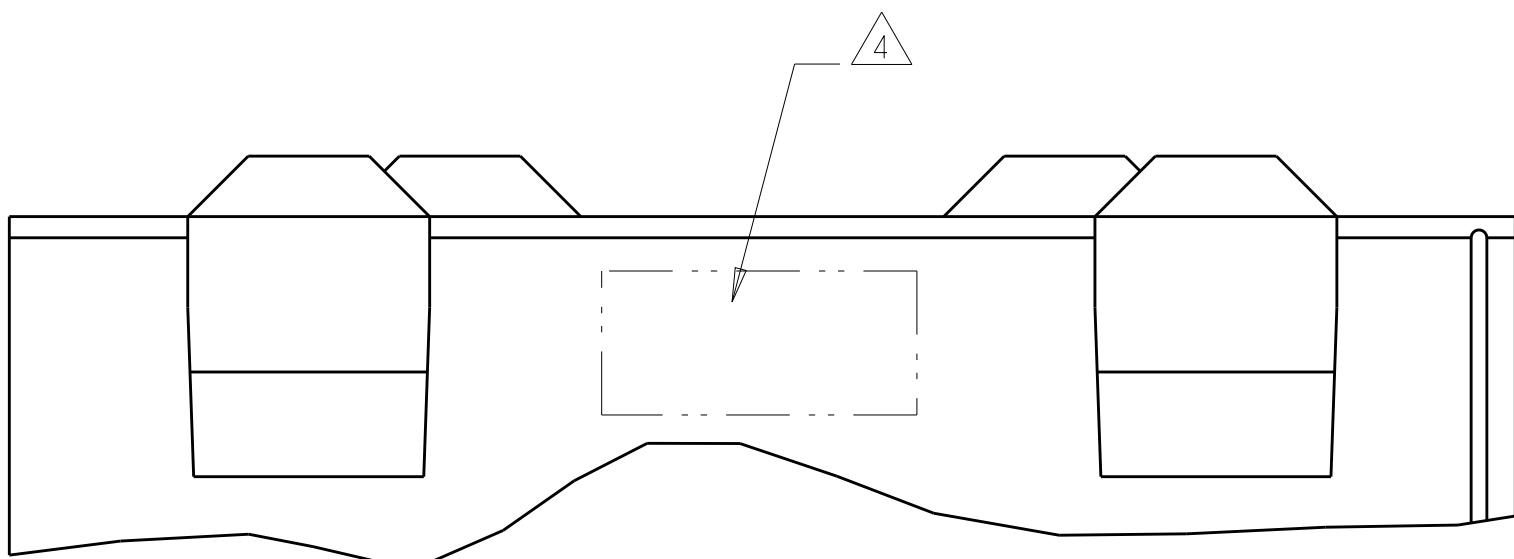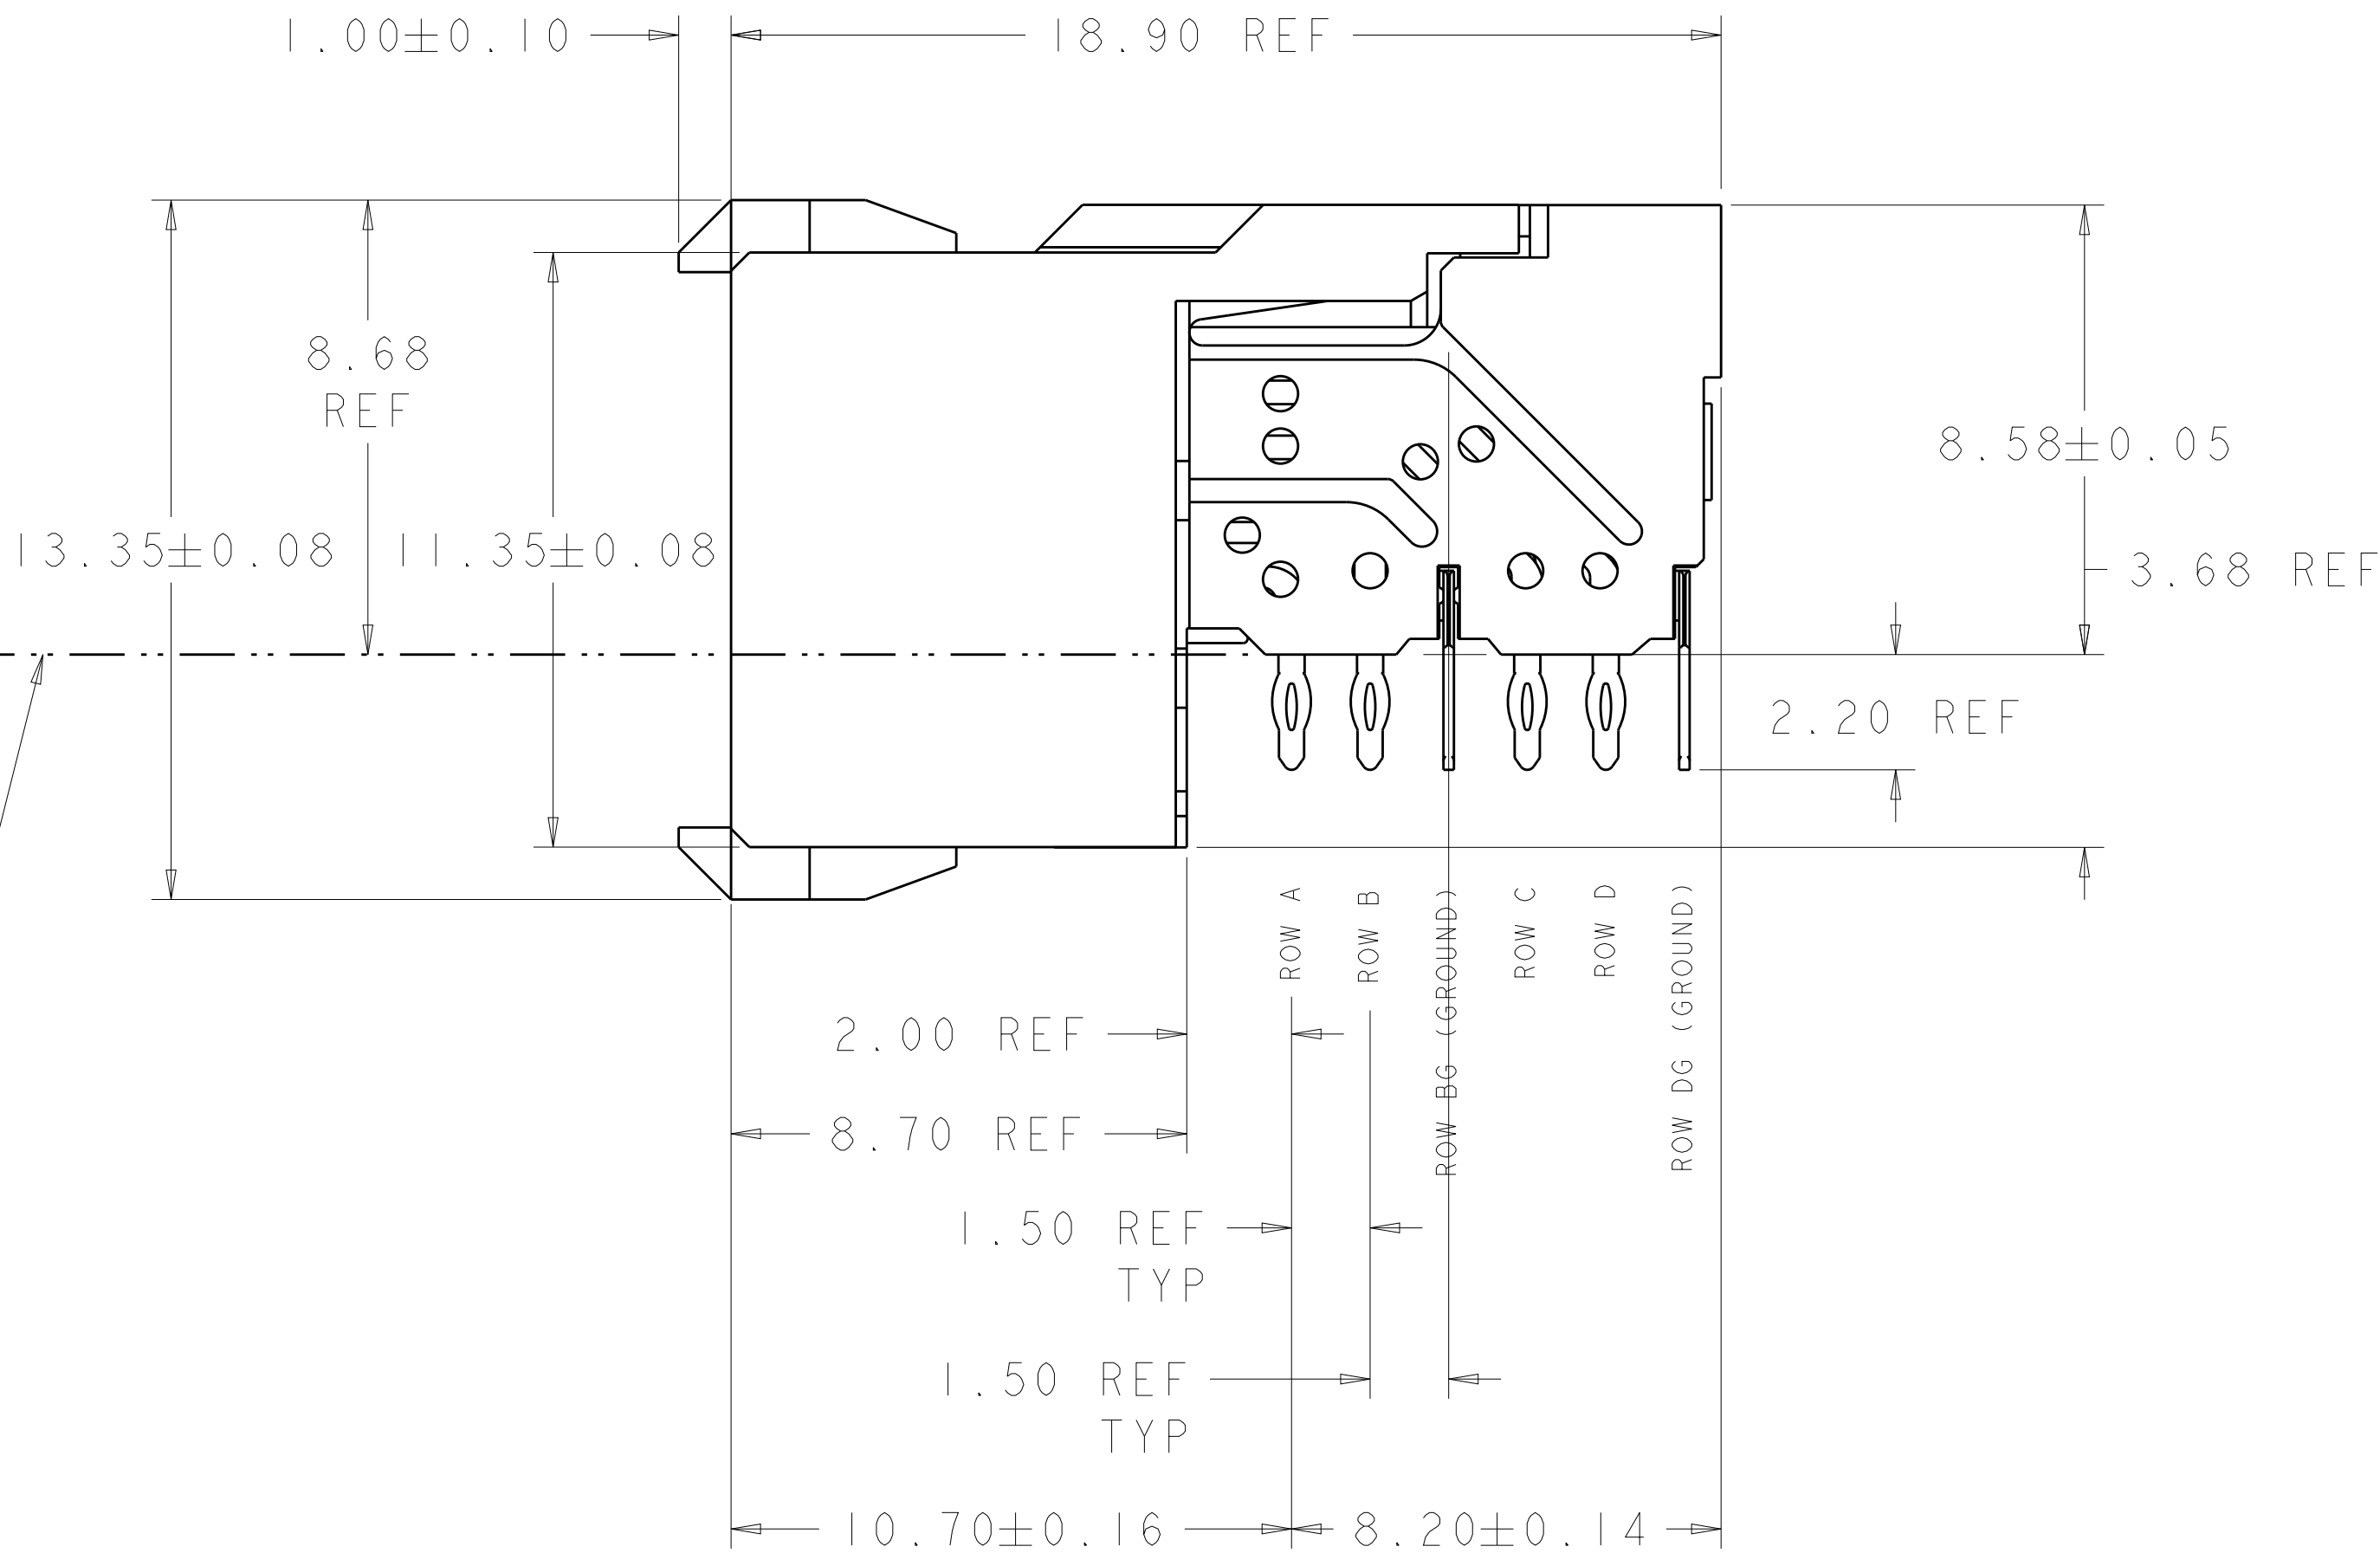

1469028-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.S. KLINE 12OCT2000	TE Connectivity	
DIMENSIONS:		CHK R. PATTERSON 10MAY2007	NAME	
mm		APVD R. PATTERSON 10MAY2007	RECEPTACLE ASSEMBLY, 2 PAIR, 25mm, HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	
0 PLC ±.005		APPLICATION SPEC	CAGE CODE	
1 PLC ±.005		WEIGHT	DRAWING NO	
2 PLC ±.005		CUSTOMER DRAWING	A100779	
3 PLC ±.005			C=1469028	
4 PLC ±.005			RESTRICTED TO	
ANGLES ±.005			SCALE	
FINISH			8:1	
			SHEET	
			1 OF 1	
			REV	
			F	