


RS1/RD1-S05

- 4 Pin SIL/ 8Pin DIL Package
- 1000VDC Isolation
- Up to 3000VDC Isolation
- Low Ripple and Noise
- Efficiency up to 83%
- Operating Temperature Range:
-40° ~ +85°C
- Non Conductive Black Plastic Case
- EMI Complies with EN55022 Class B

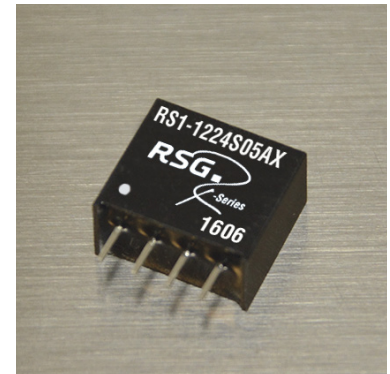


OUTPUT SPECIFICATION	ENVIRONMENTAL SPECIFICATION
Voltage accuracy: ±3%	Operating Temperature range: -40°C ~+85°C (see Derating Curve)
Line regulation: ±1.2% (per 1%Vin Change)	Maximum Case Temperature: 100°C
LOAD REGULATION: ±10% (from 20 to 100%) Load	Storage Temperature : -40°C ~+125°C
Output 3.3V Model: ±20%	Cooling : Nature Convection
Ripple noise (20Mhz bandwidth): 100mV pk-pk	PHYSICAL SPECIFICATIONS:
Temperature coefficient: ±0.02% °C	Case Material: Non-conductive Black Plastic (UL94V-0 rated)
Capacitor load: see table	PIN Material SIP Case: Ø 0.5mm Alloy42 Solder-coated
INPUT SPECIFICATIONS	PIN Material DIP Case: Ø 0.5mm Brass Solder-coated
Voltage Range: ±10%	Potting Material: Epoxy (UL94V-0 rated)
Max. Input Current: see table	Weight Case- Sip: 1.5g
No-Load/Full-Load Input Current: see table	Weight Case-DIP: 1.8g
Input Filter: Capacitors	Dimmension SIP: 0.46 x 0.24 x 0.40"
Input Reflected Ripple Current : 20mA pk-pk	Dimmension DIP: 0.50 x 0.40 x 0.27"
GENERAL SPECIFICATIONS	ABSOLUTE MAXIMUM RATINGS (1)
Efficiency: See table	Input Surge Voltage (100ms)/
I/O Isolation Voltage (60sec): 1000 ~ 3000VDC	3.3V Models: 6VDC max
I/O Isolation Capacitance: 60pF typ.	5 V Models: 7VDC max
I/O Isolation Resistance: 1000M Ohm	12V Models: 15VDC max
Switching Frequency: Variable 80kHz	15V Models: 18VDC max
Humidity: 95% rel H	24V Models: 28VDC max
Reliability Calculated MTBF : >1.121Mhrs (MIL-HDBK-217 F)	48V Models: 54VDC max
Safety Standard: (designed to meet): IEC 60950-1	Soldering Temperature (2): 260°C max.
	EMC SPECIFICATIONS
	Radiated-/Conducted Emissions: EN55022 Class B
	ESD: IEC 61000-4-2 Perf.Criteria A
	RS: IEC 61000-4-3 Perf.Criteria A
	EFT: IEC 61000-4-4 Perf.Criteria A
	SURGE: IEC 61000-4-5 Perf.Criteria A
	CS: IEC 61000-4-6 Perf.Criteria A
	PFMF IEC 61000-4-8 Perf.Criteria A

1) These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.
 2) (1.5mm from case 10sec Max.)
 3) All specifications typical at TA= 25°C, nominal input voltage and full load unless otherwise specified.
 4) The information and specification contained in this data sheet are believed to be correct at time of publication. However RSG accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.

NUMBER STRUCTURE

RD1 -	XX	XX	X	XX	A	X
Name/Package RS1=SiL4 RD1=DIL8	Input 03=3.3V 05=5.0V 12=12V 15=15V 24=24V 48=48V	Output 03=3.3V 05=5.0V 07=7.2V 09=9.0V 12=12V 15=15V 18=18V 24=24V	Type S=Single D=Dual E= Dual separ.	Power (W) 02=0.25 05=0.50 10=1.00 15=1.50 20=2.0	Code internal	Isolation (kVDC) 1= 1.0 3= 3.0

Derating Curve

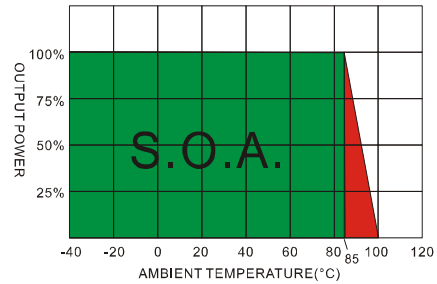

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT	INPUT Current		OUTPUT	OUTPUT Current	EFFICIENCY @FL(%)	Capacitor Load(µF)
	Voltage Range (Vdc)	No-Load (mA)	Full Load (mA)	Voltage (Vdc)	Full load (mA)		
RS1-0303S05AX	3.3	20	205	3.3	152	76	100
RS1-0305S05AX	3.3	25	216	5	100	70	100
RS1-0307S05AX	3.3	25	216	7.2	69	70	100
RS1-0309S05AX	3.3	25	216	9	56	70	100
RS1-0312S05AX	3.3	25	201	12	42	72	100
RS1-0315S05AX	3.3	25	208	15	33	73	100
RS1-0318S05AX	3.3	25	208	18	28	73	100
RS1-0324S05AX	3.3	25	208	24	21	73	100
RS1-0503S05AX	5	20	132	3.3	151.5	76	100
RS1-0505S05AX	5	13	121	5	100	83	100
RS1-0507S05AX	5	15	134	7.2	69.44	75	100
RS1-0509S05AX	5	15	128	9	55.55	78	100
RS1-0512S05AX	5	18	127	12	41.67	79	100
RS1-0515S05AX	5	22	130	15	33.33	77	100
RS1-0518S05AX	5	20	127	18	27.77	79	100
RS1-0524S05AX	5	25	134	24	20.83	75	100
RS1-1203S05AX	12	15	58	3.3	151.5	72	100
RS1-1205S05AX	12	10	54	5	100	78	100
RS1-1207S05AX	12	15	57	7.2	69.44	73	100
RS1-1209S05AX	12	15	57	9	55.56	73	100
RS1-1212S05AX	12	20	58	12	41.67	72	100
RS1-1215S05AX	12	20	61	15	33.33	69	100
RS1-1218S05AX	12	15	61	18	27.77	68	100
RS1-1224S05AX	12	15	59	24	20.83	71	100
RS1-1503S05AX	15	10	44	3.3	151.5	75	100
RS1-1505S05AX	15	8	43	5	100	78	100
RS1-1507S05AX	15	12	44	7.2	69.44	75	100
RS1-1509S05AX	15	12	44	9	55.55	75	100
RS1-1512S05AX	15	10	44	12	41.67	77	100
RS1-1515S05AX	15	15	48	15	33.33	70	100
RS1-1518S05AX	15	12	51	18	27.77	66	100
RS1-1524S05AX	15	10	51	24	20.83	66	100
RS1-2403S05AX	24	8	31	3.3	151.5	69	100
RS1-2405S05AX	24	8	29	5	100	73	100
RS1-2407S05AX	24	10	30	7.2	69.44	70	100
RS1-2409S05AX	24	10	30	9	55.55	71	100
RS1-2412S05AX	24	8	30	12	41.67	71	100
RS1-2415S05AX	24	10	29	15	33.33	73	100
RS1-2418S05AX	24	10	29	18	27.77	73	100
RS1-2424S05AX	24	10	29	24	20.83	72	100
RS1-4803S05AX	48	6	17	3.3	151.5	60	100
RS1-485S05AX	48	6	16	5	100	66	100
RS1-4807S05AX	48	6	17	7.2	69.44	60	100
RS1-4809S05AX	48	6	17	9	55.55	62	100
RS1-4812S05AX	48	6	17	12	41.67	64	100
RS1-4815S05AX	48	6	17	15	33.33	62	100
RS1-4818S05AX	48	6	17	18	27.77	62	100
RS1-4824S05AX	48	10	18	24	20.83	61	100

Suffix "3" means 3kVdc isolation

STAND Juni 2016 Rev 01

RS1/RD1-S05


MODEL SELECTION GUIDE

MODEL NUMBER	INPUT	INPUT Current		OUTPUT	OUTPUT Current	EFFICIENCY @FL(%)	Capacitor Load(uF)
	Voltage Range (Vdc)	No-Load (mA)	Full Load (mA)	Voltage (Vdc)	Full load (mA)		
RD1-0303S05AX	3.3	20	205	3.3	152	76	100
RD1-0305S05AX	3.3	25	216	5	100	70	100
RD1-0307S05AX	3.3	25	216	7.2	69	70	100
RD1-0309S05AX	3.3	25	216	9	56	70	100
RD1-0312S05AX	3.3	25	201	12	42	72	100
RD1-0315S05AX	3.3	25	208	15	33	73	100
RD1-0318S05AX	3.3	25	208	18	28	73	100
RD1-0324S05AX	3.3	25	208	24	21	73	100
RD1-0503S05AX	5	16	132	3.3	151.5	76	100
RD1-0505S05AX	5	15	124	5	100	81	100
RD1-0507S05AX	5	15	134	7.2	69.44	75	100
RD1-0509S05AX	5	15	128	9	55.55	78	100
RD1-0512S05AX	5	18	127	12	41.67	79	100
RD1-0515S05AX	5	22	130	15	33.33	77	100
RD1-0518S05AX	5	20	127	18	27.77	79	100
RD1-0524S05AX	5	25	134	24	20.83	75	100
RD1-1203S05AX	12	15	58	3.3	151.5	73	100
RD1-1205S05AX	12	12	54	5	100	78	100
RD1-1207S05AX	12	15	57	7.2	69.44	73	100
RD1-1209S05AX	12	15	58	9	55.56	73	100
RD1-1212S05AX	12	20	58	12	41.67	72	100
RD1-1215S05AX	12	20	61	15	33.33	69	100
RD1-1218S05AX	12	15	61	18	27.77	68	100
RD1-1224S05AX	12	15	59	24	20.83	71	100
RD1-1503S05AX	15	10	44	3.3	151.5	75	100
RD1-1505S05AX	15	8	43	5	100	78	100
RD1-1507S05AX	15	12	44	7.2	69.44	75	100
RD1-1509S05AX	15	12	44	9	55.55	75	100
RD1-1512S05AX	15	10	44	12	41.67	77	100
RD1-1515S05AX	15	15	48	15	33.33	70	100
RD1-1518S05AX	15	12	51	18	27.77	66	100
RD1-1524S05AX	15	10	51	24	20.83	66	100
RD1-2403S05AX	24	8	31	3.3	151.5	69	100
RD1-2405S05AX	24	10	29	5	100	74	100
RD1-2407S05AX	24	10	31	7.2	69.44	69	100
RD1-2409S05AX	24	10	30	9	55.55	71	100
RD1-2412S05AX	24	10	31	12	41.67	69	100
RD1-2415S05AX	24	9	31	15	33.33	69	100
RD1-2418S05AX	24	10	29	18	27.77	73	100
RD1-2424S05AX	24	10	29	24	20.83	72	100

Suffix "3" means 3kVdc isolation


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

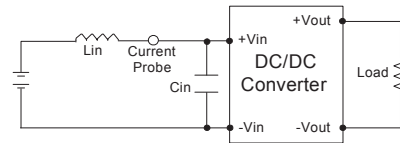

Output Ripple & Noise Measurement Test


The Scope measurement bandwidth is 20MHz .



EMI Filter

Input filter components ($C1$, L , $C2$, $C3$) are used to help meet conducted emissions requirement for the module.


These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

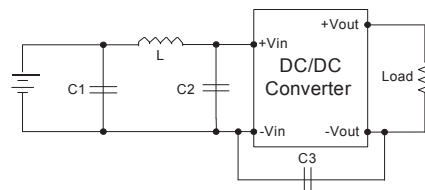

	C1	L	C2	C3
RS1/RD1-03XXS05AX	1210, 2.2 μ F/100V	18 μ H		
RS1/RD1-05XXS05AX	1210, 2.2 μ F/100V	18 μ H		
RS1/RD1-12XXS05AX	1210, 2.2 μ F/100V	18 μ H		
RS1/RD1-15XXS05AX	1210, 2.2 μ F/100V	18 μ H		
RS1/RD1-24XXS05AX	1210, 2.2 μ F/100V	18 μ H	1210, 2.2 μ F/100V	1206, 470pF/2KV
RS1/RD1-48XXS05AX	Electrolytic capacitor, 10 μ F/100V	18 μ H	1210, 2.2 μ F/100V	1206, 470pF/2KV

1. Ripple/Noise measured with 20MHz bandwidth.
2. Tested by minimal V_{in} and constant resistive load.
3. Measured Input reflected ripple current with a simulated source inductance of 12 μ H.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. Input filter components are required to help meet conducted emission class B, which application refer to the EMI Filter of design & feature configuration.
7. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
The filter capacitor RSG suggest: Nippon - chemi - con KY series, 470 μ F/100V.

RS1/RD1-S05


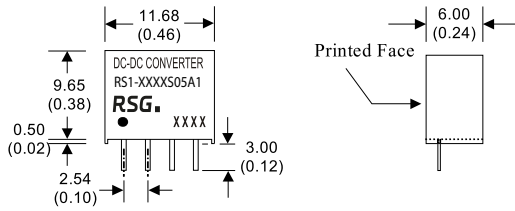


* The thickness of 48V input voltage model is 7.50(0.29)

4 Pin SIL Package

Notes : All dimensions are typical in millimeters (inches).


1. Pin diameter: 0.5±0.05 (0.02±0.002)
2. Pin pitch and length tolerance: ±0.35 (±0.014)
3. Case Tolerance: ±0.5 (±0.02)

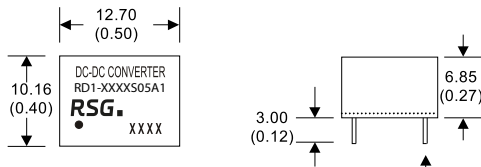

8 Pin DIL Package

Notes : All dimensions are typical in millimeters (inches).

1. Pin diameter: 0.5±0.05 (0.02±0.002)
2. Pin pitch and length tolerance: ±0.35 (±0.014)
3. Case Tolerance: ±0.5 (±0.02)



8 PIN DIL

PIN CONNECTIONS	
PIN NUMBER	
1	
4	
5	
7	

(The Pin Connection of high isolation one is the same with normal one.)

4 PIN SIL

PIN CONNECTIONS	
PIN NUMBER	
1	
2	
3	
4	

(The Pin Connection of high isolation one is the same with normal one.)

The models listed here are just standard type. If you need a product with special specification or you have questions regarding packing standards (Tube oder Tape/Reel) as well as application support, please contact our specialists: sales@rsg-electronic.de or +49 69-984047-41/-28