
51 2,5 UF


Direct connectors for insert cards, pitch 2.5/2.54/5.0/ 5.08 mm

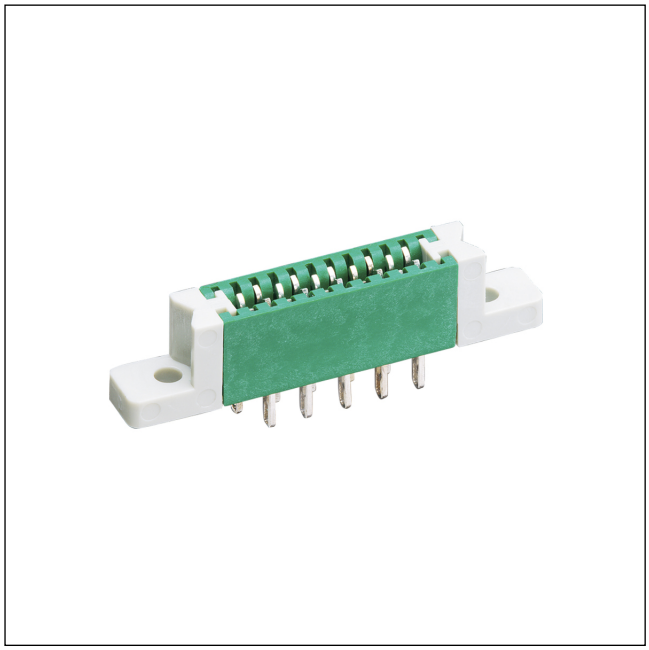

Socket board for direct mating, with mounted pair of flanges F, with solder eyes

State: Phasing out

51 2,5 UF

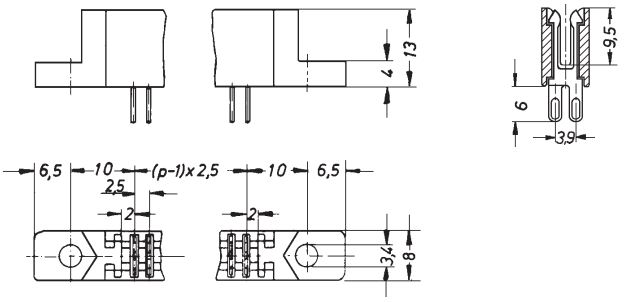

Environmental conditions

Temperature range	-25 °C/+100 °C

Materials

Insulating body	PPO
Contact spring	CuSn, pre-nickel and tin-plated
Flange	PC

Mechanical data

Mating with	Leiterplatte 1,5 ± 0,14 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 3 mΩ
Rated current	5 A
Rated voltage	250 V AC
Rated impulse voltage	≥ 1,5 kV

Associated products

Accessories

FF SP 3

51 2,5 UF

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
2,5 UF 03	3	200	2000
2,5 UF 04	4	200	2000
2,5 UF 05	5	200	2000
2,5 UF 06	6	200	2000
2,5 UF 07	7	200	2000
2,5 UF 08	8	200	2000
2,5 UF 09	9	200	2000
2,5 UF 10	10	200	2000
2,5 UF 11	11	200	2000
2,5 UF 12	12	200	2000
2,5 UF 13	13	200	2000
2,5 UF 14	14	200	2000
2,5 UF 15	15	200	2000
2,5 UF 16	16	200	2000
2,5 UF 17	17	200	2000
2,5 UF 18	18	200	2000
2,5 UF 19	19	200	2000
2,5 UF 20	20	200	2000
2,5 UF 21	21	200	2000
2,5 UF 22	22	200	2000
2,5 UF 23	23	200	2000
2,5 UF 24	24	200	2000
2,5 UF 25	25	200	2000
2,5 UF 26	26	200	2000
2,5 UF 27	27	200	2000
2,5 UF 28	28	200	2000
2,5 UF 29	29	200	2000
2,5 UF 30	30	200	2000
2,5 UF 31	31	200	2000
2,5 UF 32	32	200	2000
2,5 UF 33	33	200	2000
2,5 UF 34	34	200	2000
2,5 UF 35	35	200	2000
2,5 UF 36	36	200	2000
2,5 UF 37	37	200	2000
2,5 UF 38	38	200	2000

51 2,5 UF

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
2,5 UF 39	39	200	2000
2,5 UF 40	40	200	2000
2,5 UF 41	41	200	2000
2,5 UF 42	42	200	2000
2,5 UF 43	43	200	2000
2,5 UF 44	44	200	2000
2,5 UF 45	45	200	2000
2,5 UF 46	46	200	2000
2,5 UF 47	47	200	2000
2,5 UF 48	48	200	2000
2,5 UF 49	49	200	2000
2,5 UF 50	50	200	2000
2,5 UF 51	51	200	2000
2,5 UF 52	52	200	2000
2,5 UF 53	53	200	2000
2,5 UF 54	54	200	2000
2,5 UF 55	55	200	2000
2,5 UF 56	56	200	2000
2,5 UF 57	57	200	2000
2,5 UF 58	58	200	2000
2,5 UF 59	59	200	2000
2,5 UF 60	60	200	2000

Packaging:
in bulk, in a cardboard box