

**FMH S1/16H F1 B RL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****OMNIMATE® - Board-to-Board connectors**

Flexible engineering of compact devices

The use of future-proof contact systems, as well as the optimisation of manufacturing processes, are increasingly important in the development of efficient industrial devices, especially in the field of Industry 4.0.

OMNIMATE® board-to-board connectors feature a 1.27 mm pitch and offer maximum flexibility due to different designs.

- **Flexible device design** - Industrial suitable density combined with high flexible connection combinations (Mezzanine, Mother-to-Daughter, Extender-card, Cable-to-Board)
- **Automation-Ready** - Developed for automatic assembly with high precise pin coplanarity and SMT-fixation
- **Reliable contact** - Up to 500 mating cycles due to industry suitable gold-surface (PdNi-Au)
- **Process-Ready** - High performance LCP material for reflow soldering
- **Scalability** - Different heights with high contact overlapping ensure various solutions from 12 – 80 poles.
- **Robust miniaturisation** - simple and safe connection even possible under unfavorable mating conditions – e.g. inclination or offset.

**General ordering data**

|              |                                                                                                                     |
|--------------|---------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, male header, SMD solder connection, Pitch in mm (P): 1.27 mm, Number of poles: 16, 90°, Tape |
| Order No.    | <a href="#">2747170000</a>                                                                                          |
| Type         | FMH S1/16H F1 B RL                                                                                                  |
| GTIN (EAN)   | 4064675001454                                                                                                       |
| Qty.         | 560 pc(s).                                                                                                          |
| Product data | IEC: / 2.8 A<br>UL:                                                                                                 |
| Packaging    | Tape                                                                                                                |

## FMH S1/16H F1 B RL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 10.6 mm  | Depth (inches)  | 0.417 inch |
| Height     | 4.25 mm  | Height (inches) | 0.167 inch |
| Width      | 15.24 mm | Width (inches)  | 0.6 inch   |
| Net weight | 3.146 g  |                 |            |

## System specifications

|                           |                                  |                          |                  |
|---------------------------|----------------------------------|--------------------------|------------------|
| Product family            | OMNIMATE Signal - Board-to-Board | Type of connection       | Board connection |
| Mounting onto the PCB     | SMD solder connection            | Pitch in mm (P)          | 1.27 mm          |
| Pitch in inches (P)       | 0.05 inch                        | Outgoing elbow           | 90°              |
| Number of poles           | 16                               | Coplanarity:             | 0.1 mm           |
| Number of rows            | 1                                | Pin series quantity      | 2                |
| Volume resistance         | <25 mΩ                           | Plugging cycles          | 500              |
| Plugging force/pole, max. | 0.5 N                            | Pulling force/pole, max. | 0.5 N            |

## Material data

|                             |          |                                 |                                          |
|-----------------------------|----------|---------------------------------|------------------------------------------|
| Insulating material         | LCP      | Colour                          | black                                    |
| Colour chart (similar)      | RAL 9011 | Insulating material group       | Illa                                     |
| Moisture Level (MSL)        | 1        | Contact base material           | Copper alloy                             |
| Contact surface             | Ni/Au    | Layer structure of plug contact | ≥ 2 µm Ni / ≥ 0.4 µm PdNi / ≥ 0.05 µm Au |
| Storage temperature, min.   | -40 °C   | Storage temperature, max.       | 70 °C                                    |
| Operating temperature, min. | -55 °C   | Operating temperature, max.     | 125 °C                                   |

## Rated data acc. to IEC

|                                                            |        |                 |        |
|------------------------------------------------------------|--------|-----------------|--------|
| Rated current, min. number of poles (T <sub>u</sub> =20°C) | 2.8 A  | Clearance, min. | 0.4 mm |
| Creepage distance, min.                                    | 0.4 mm |                 |        |

## Rated data acc. to UL 1059

|                              |                                                                                     |                         |        |
|------------------------------|-------------------------------------------------------------------------------------|-------------------------|--------|
| Institute (cURus)            |  | Certificate No. (cURus) | E92202 |
| Reference to approval values | Specifications are maximum values, details - see approval certificate.              |                         |        |

## Packing

|           |      |            |     |
|-----------|------|------------|-----|
| Packaging | Tape | VPE length | 0 m |
| VPE width | 0 m  | VPE height | 0 m |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002637    | ETIM 7.0    | EC002637    |
| ETIM 8.0    | EC002637    | ECLASS 9.0  | 27-44-04-02 |
| ECLASS 9.1  | 27-44-04-02 | ECLASS 10.0 | 27-44-04-02 |
| ECLASS 11.0 | 27-46-02-01 |             |             |

**FMH S1/16H F1 B RL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Important note**

|                |                                                                                                                                                                                                                                                                                                                            |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request. |
| Notes          | <ul style="list-style-type: none"><li>Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months</li></ul>                                                                                                                                                                     |

**Approvals**

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E92202  |

**Downloads**

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">STEP</a>                     |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |


## FMH S1/16H F1 B RL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)


## Drawings

## Product image

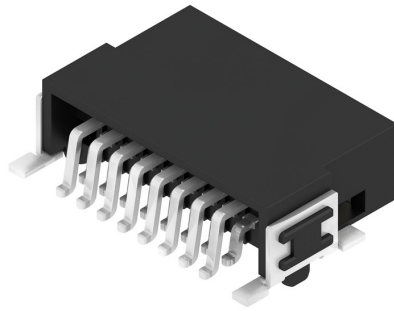


## Dimensional drawing


| Type               | Order no.  | No. of poles | A     | B     | C     | D     | E     |
|--------------------|------------|--------------|-------|-------|-------|-------|-------|
| FMH S1/24H F1 B RL | 2747100000 | 12           | 6.50  | 16.17 | 12.7  | 8.57  | 8.57  |
| FMH S1/16H F1 B RL | 2747100001 | 10           | 5.80  | 13.21 | 10.24 | 13.11 | 13.11 |
| FMH S1/20H F1 B RL | 2747100000 | 20           | 11.43 | 15.85 | 17.78 | 14.63 | 13.85 |
| FMH S1/20H F1 B RL | 2747100001 | 20           | 15.24 | 19.80 | 21.50 | 18.48 | 17.48 |
| FMH S1/24H F1 B RL | 2747200000 | 32           | 18.00 | 23.47 | 24.4  | 22.27 | 21.27 |
| FMH S1/24H F1 B RL | 2747200001 | 40           | 24.13 | 28.55 | 30.48 | 27.35 | 26.35 |
| FMH S1/24H F1 B RL | 2747200002 | 40           | 30.48 | 34.4  | 36.43 | 33.1  | 32.1  |
| FMH S1/24H F1 B RL | 2747200003 | 60           | 41.51 | 46.33 | 48.26 | 45.13 | 44.13 |
| FMH S1/24H F1 B RL | 2747240000 | 80           | 48.53 | 53.35 | 55.48 | 52.15 | 51.15 |



## Detailed drawing

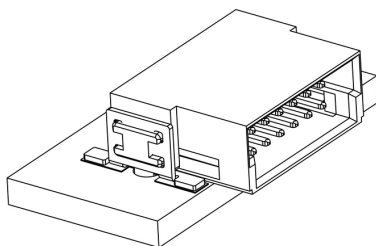

## Derating curve

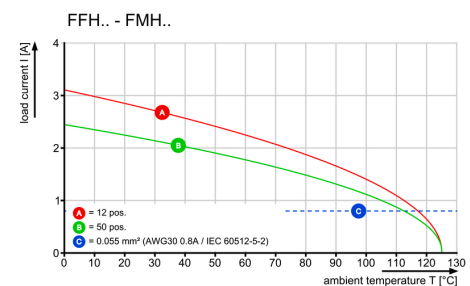

**FMH S1/16H F1 B RL**

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany


[www.weidmueller.com](http://www.weidmueller.com)

Drawings

Extender-Board




Mezzanine

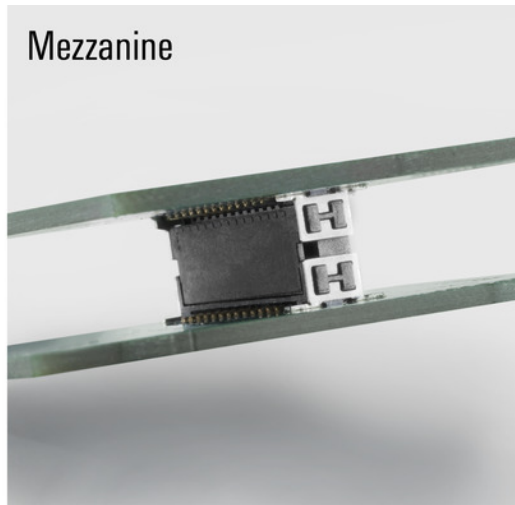








Mother-to-Daughter




Board-to-Wire

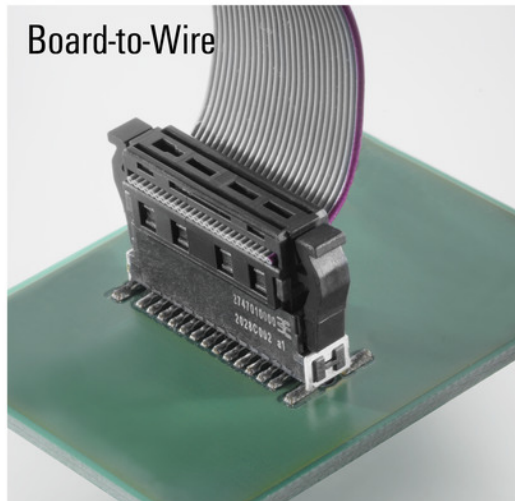

## FMH S1/..H F1 B RL

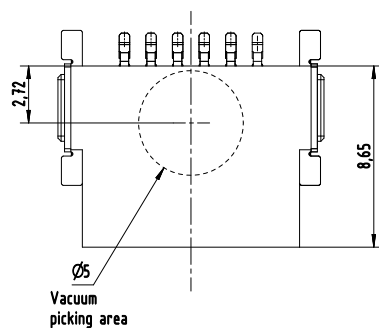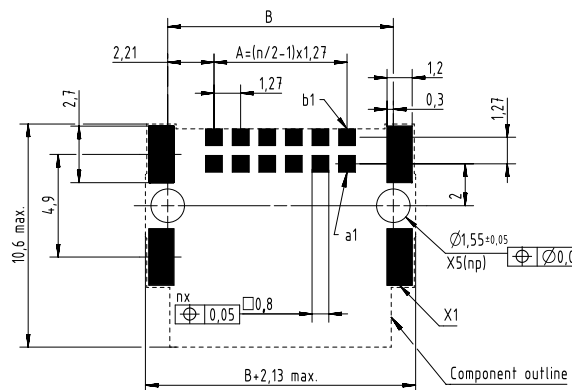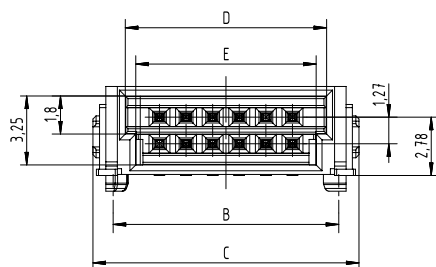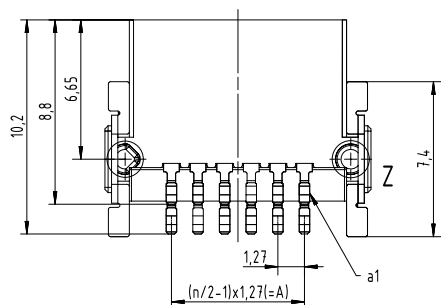


| Type               | Order no.  | No. of poles | A     | B     | C     | D     | E     |
|--------------------|------------|--------------|-------|-------|-------|-------|-------|
| FMH S1/12H F1 B RL | 2747160000 | 12           | 6,35  | 10,77 | 12,7  | 9,57  | 8,57  |
| FMH S1/16H F1 B RL | 2747170000 | 16           | 8,89  | 13,31 | 15,24 | 12,11 | 11,11 |
| FMH S1/20H F1 B RL | 2747180000 | 20           | 11,43 | 15,85 | 17,78 | 14,65 | 13,65 |
| FMH S1/26H F1 B RL | 2747190000 | 26           | 15,24 | 19,66 | 21,59 | 18,46 | 17,46 |
| FMH S1/32H F1 B RL | 2747200000 | 32           | 19,05 | 23,47 | 25,4  | 22,27 | 21,27 |
| FMH S1/40H F1 B RL | 2747210000 | 40           | 24,13 | 28,55 | 30,48 | 27,35 | 26,35 |
| FMH S1/50H F1 B RL | 2747220000 | 50           | 30,48 | 34,9  | 36,83 | 33,7  | 32,7  |
| FMH S1/68H F1 B RL | 2747230000 | 68           | 41,91 | 46,33 | 48,26 | 45,13 | 44,13 |
| FMH S1/80H F1 B RL | 2747240000 | 80           | 49,53 | 53,95 | 55,88 | 52,75 | 51,75 |

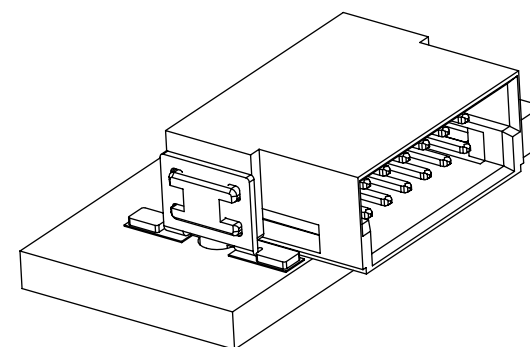


x= only mechanical  
np= not plated thru hole  
n= number of poles

Male angled - FMH


Application - dimensions

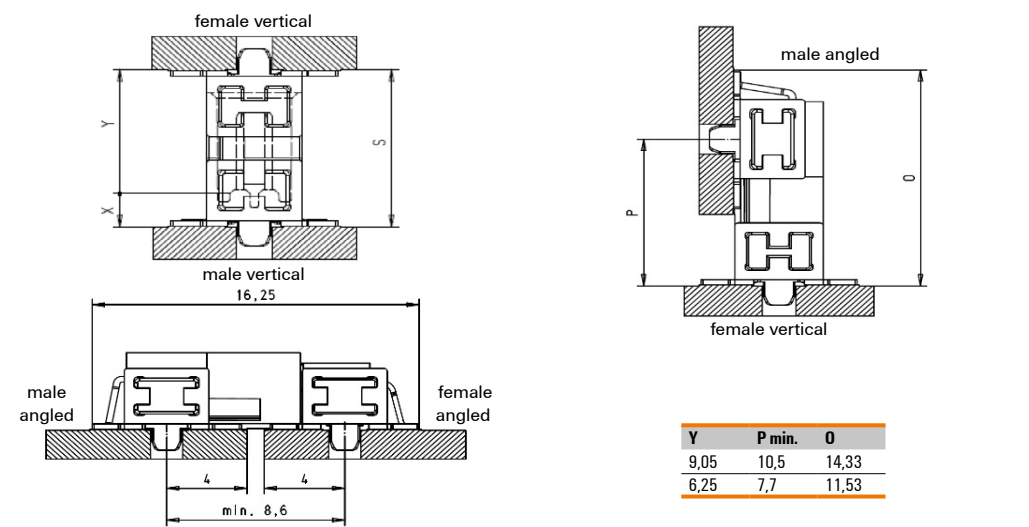


Tape - dimensions

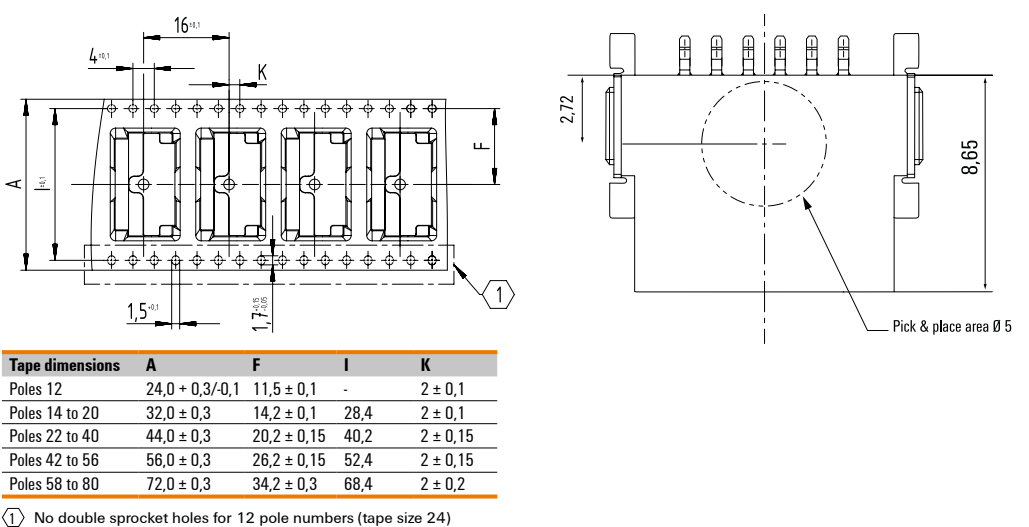

Mating conditions

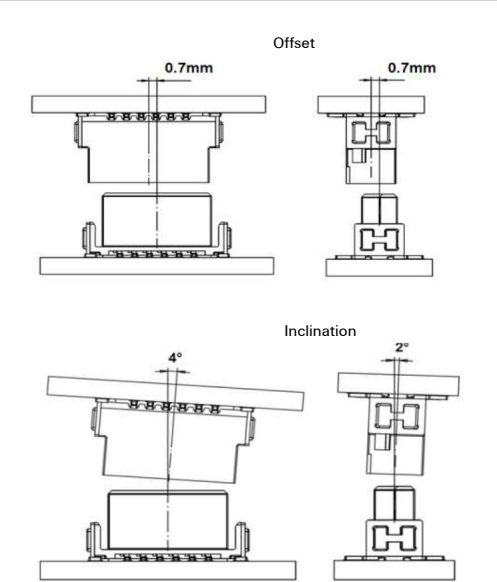

Reel - dimensions

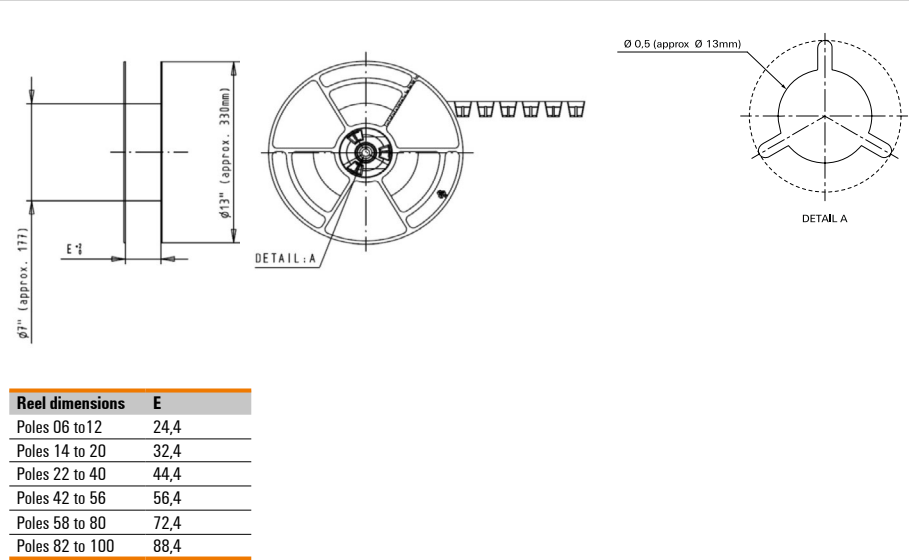

## Recommended reflow soldering profile

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com



### Reflow soldering profile

The perfect soldering profile for SMT Surface Mount Technology is one the most exiting question in SMT production. But there are more than one correct answer: The diagram of temperature-on-time is related to processing features of solder paste and to maximum load of components.

We have to consider the following parameters:

- Time for pre heating
- Maximum temperature
- Time above melting point
- Time for cooling
- Maximum heating rate
- Maximum cooling rate

We recommend a typical solder profile with associated process limits. With preheating components and board are prepared smoothly for the solder phase. Heating rate is typically  $\leq +3\text{K/s}$ . In parallel the solder paste is 'activated'. The time above melting point of 217°C the paste gets liquid and components and boards begin to connect. The maximum temperature of 245°C to 254°C should stay between 10 and 40 seconds. In the cooling phase at  $\geq -6\text{K/s}$  solder is cured. Board and components cool down while avoiding cold cracks.