

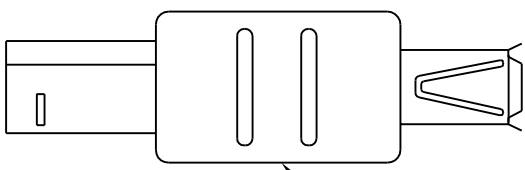
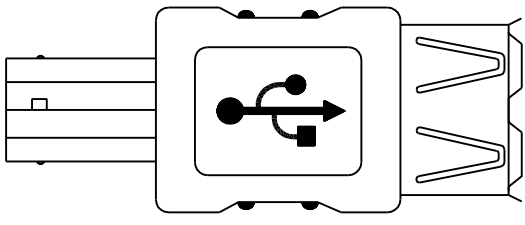


A B C D E F

DATE BY REVISION



INSULATOR MATERIAL  
 :PBT, UL 94V-0  
 CONTACT MATERIAL  
 :Brass, Gold Plated Over Nickel  
 SHELL FINISH  
 :Nickel Silver  
 OVERMOLD MATERIAL  
 :PVC  
 CURRENT RATING  
 :0.5mA  
 DIELECTRIC STRENGTH  
 :1000V AC for one minute  
 INSULATOR RESISTANCE  
 :1000MΩ min at 500V DC

CONFIGURATION:  
 A Female B Male

- 1 \_\_\_\_\_ 1
- 2 \_\_\_\_\_ 2
- 3 \_\_\_\_\_ 3
- 4 \_\_\_\_\_ 4
- G \_\_\_\_\_ G

DATE	17 JAN,2003	PARTS NO	
UNIT	MM	DRAWN NO	A-USB-2
SCALE		BUYER NO	002

TITLE:  
 ADAPTER  
 USB A FEMALE-USB B MALE  
**A-USB-2**

DRAWN	Y.C.C	CHECK	APPRO
	1/17		
ASSMANN ELECTRONICS.INC			