

# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series

HF <sup>Pb</sup> 0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant

### Description

A 1000 VAC/VDC rated ceramic tube cartridge fuse in a compact 6.3 x 32mm package

### Features

- Fast Acting, high breaking capacity under 1000VDC/AC
- Available in cartridge and pigtail axial lead
- Designed to UL 248-1
- RoHS 2 compliant
- Halogen Free
- Leadfree



### Applications

- Digital Measuring Instrument
- Industrial Power Supply
- DC/DC module

LEAD FREE = <sup>Pb</sup>  
HALOGEN FREE = HF




### Physical Specifications

Materials	Body : Ceramic
	Cap : Silver Plated Caps
	Pigtail Leads : Tin Plated Copper
Marking	On Fuse :
	"bel"
	"0ADB" "Current Rating", "Voltage Rating", " Appropriate Safety Logos"
	On Label :
	"bel", "0ADBC" or "0ADBP", "Current Rating", "Voltage Rating", "Interrupting Rating", " Appropriate Safety Logos" and "  ", "  " (China RoHS compliant).

### Electrical Characteristics

Testing Current	Opening Time
100%	4 hour Min.
250%	120 sec Max.

### Ratings

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE NUMBER	VOLTAGE RATING (V)	AMPERE RANGE / VOLT @ I.R. ABILITY*
	E20624	200mA - 3A / 1000V AC/DC	200mA - 3A / 1000V @ 10KA AC / 1000V @ 10KA DC

\* I.R. = INTERRUPTING RATING = SHORT CIRCUIT RATING (AMPS)

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series

HF  0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant

### Environmental Specifications

Operating Temperature	-50 °C to +105 °C
Terminal Strength	MIL-STD-202G, Method 211 Test Condition A
Lead Solderability	MIL-STD-202, Method 208
Mechanical Vibration	MIL-STD-202, Method 201
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (5 cycles -65 °C to +125 °C).
Humidity	MIL-STD-202, Method 103, Test Condition A 95%RH and 40 °C for 240 hours

### Electrical Specifications

Part Number	Ampere Rating	Typical Cold Resistance (mOhms)	Voltage and Interrupting Ratings	Typical Voltage Drop (mV)	Typical Pre-Arcing I <sup>2</sup> t (A <sup>2</sup> Sec)
0ADBC0200-BE	200mA	3900	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	850	0.003
0ADBP0200-RE					
0ADBC0250-BE	250mA	2755		828	0.009
0ADBP0250-RE					
0ADBC0315-BE	315mA	1900		568	0.030
0ADBP0315-RE					
0ADBC0400-BE	400mA	1875		890	0.038
0ADBP0400-RE					
0ADBC0500-BE	500mA	1160		616	0.041
0ADBP0500-RE					
0ADBC0600-BE	600mA	1035		765	0.072
0ADBP0600-RE					
0ADBC1000-BE	1A	450		553	0.23
0ADBP1000-RE					
0ADBC1250-BE	1.25A	300		550	3
0ADBP1250-RE					
0ADBC1600-BE	1.6A	173	380	0.768	
0ADBP1600-RE					
0ADBC2000-BE	2A	155	381	1.28	
0ADBP2000-RE					
0ADBC2500-BE	2.5A	89	275	3.91	
0ADBP2500-RE					
0ADBC3000-BE	3A	64	218	7.74	
0ADBP3000-RE					

Consult manufacturer for other ratings

Specifications subject to change without notice

\* DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C

\* Typical Pre-arcing I<sup>2</sup>t are measured at 10In Current



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)


# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series


HF  0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant

### Average Time Current Curve

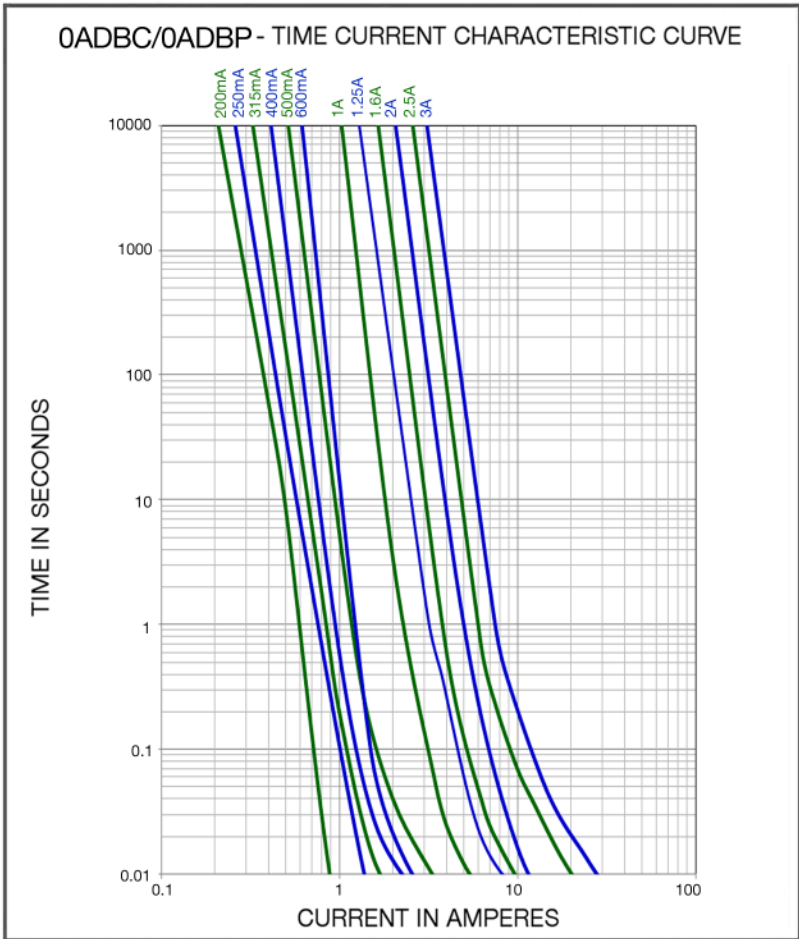

### Temperature Re-Rating Curve

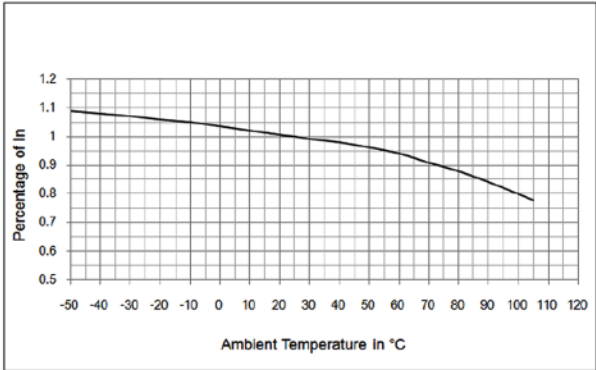

### Soldering parameters for Pigtail Type

Wave Soldering Compatible : (260° C, 10 sec max)

Hand-Solder:

Solder Iron Temperature: (350° C +/- 5° C)

Heating Time: (5 sec max)

Specifications subject to change without notice



**bel** POWER SOLUTIONS & PROTECTION  
a bel group

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series

HF  0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant


### Fuse FGNO Explanation

0ADB X [XXXX] - XX


0ADBC/P=0ADBC/P; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Fraction	Decimal	Milliamps	Bel FGNO[XXXX]	Fraction	Decimal	Amps	Bel FGNO[XXXX]
1/5	.200	200	0200		1.0	1	1000
1/4	.250	250	0250	1-1/4	1.25	1.25	1250
	.315	315	0315		1.6	1.6	1600
4/10	.400	400	0400		2.0	2	2000
1/2	.500	500	0500	2-1/2	2.5	2.5	2500
6/10	.600	600	0600		3.0	3	3000

### Mechanical Dimensions

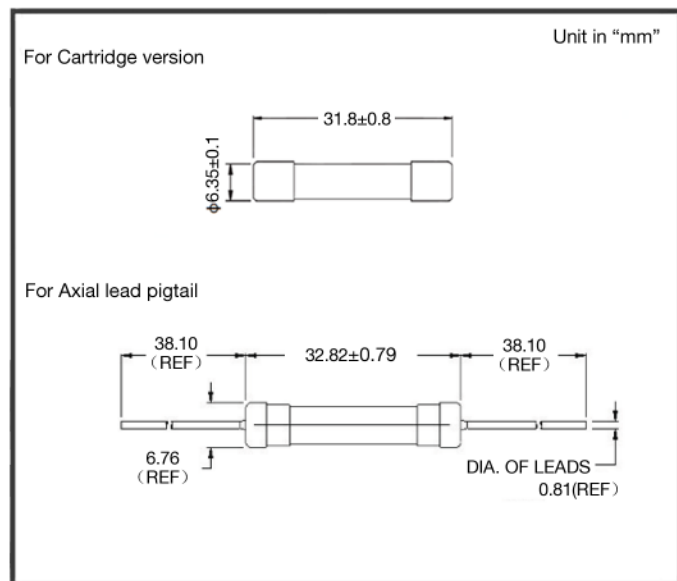

### Ordering Information

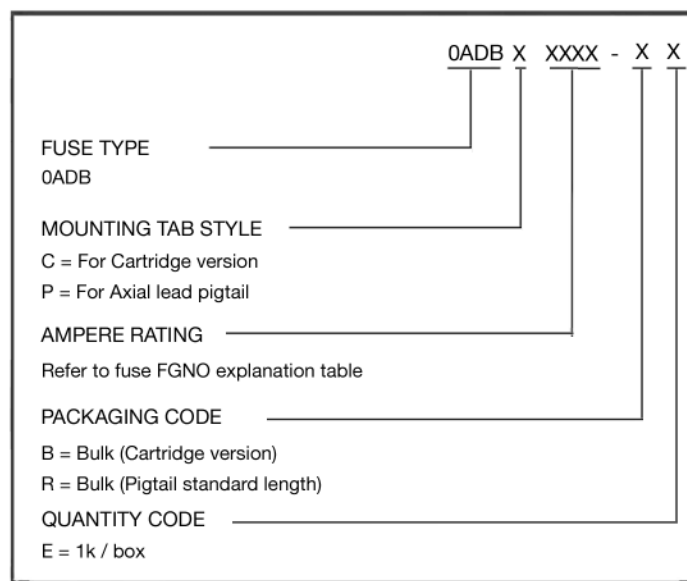

### Packaging

Packaging Option	Quantity	Packaging Code
Bulk	1000	BE
Bulk (Pigtail Type)	1000	RE

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)