


4	0.5mm间距翻盖式下接—焊片	PhosphorBronze T=0.20MM	镀锡	各1 PCS	左/右焊片
3	0.5mm间距翻盖式下接—锁扣	LCP	黑色	1 PCS	
2	0.5mm间距翻盖式下接—PIN	PhosphorBronze T=0.20MM	镀锡/半金/全金	N PCS	
1	0.5mm间距翻盖式下接—基座	LCP	米色	1 PCS	n*2+1 P
序号	品名	材料规格	电镀方式/颜色	使用数量	备注

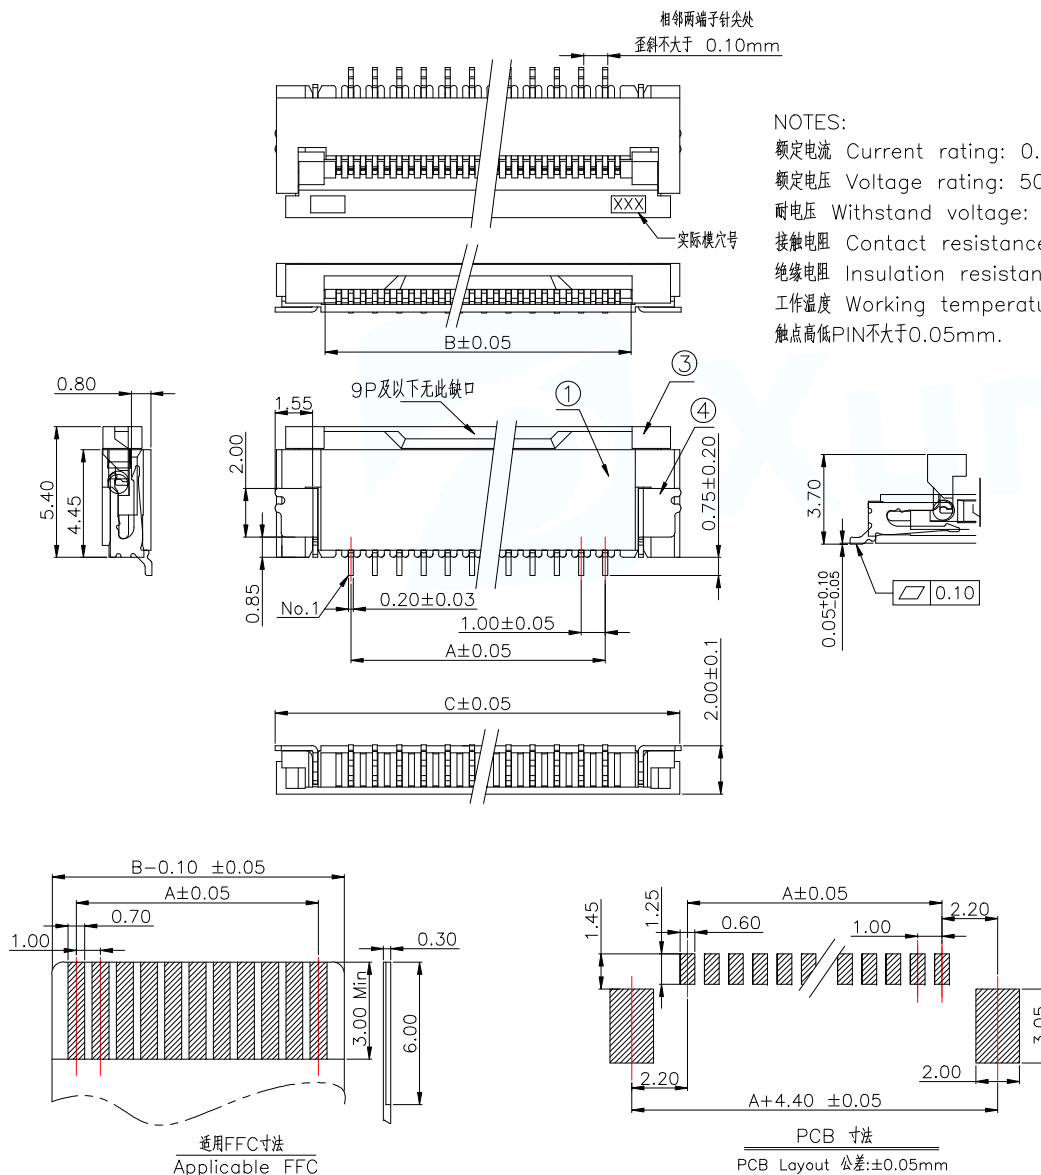

NOTES:
 额定电流 Current rating: 0.5A
 额定电压 Voltage rating: 50V
 耐电压 Withstand voltage: 500V AC/minute
 接触电阻 Contact resistance :≤40mΩ
 绝缘电阻 Insulation resistance: 100MQ MIN
 工作温度 Working temperature: -25℃ ~ +85℃
 触点高低PIN不大于0.05mm.

Part No	Pin	A	B	C
FPC-1.0FX-2PWBH20	2	1.00	3.10	7.20
FPC-1.0FX-3PWBH20	3	2.00	4.10	8.20
FPC-1.0FX-4PWBH20	4	3.00	5.10	9.20
FPC-1.0FX-5PWBH20	5	4.00	6.10	10.20
FPC-1.0FX-6PWBH20	6	5.00	7.10	11.20
FPC-1.0FX-7PWBH20	7	6.00	8.10	12.20
FPC-1.0FX-8PWBH20	8	7.00	9.10	13.20
FPC-1.0FX-9PWBH20	9	8.00	10.10	14.20
FPC-1.0FX-10PWBH20	10	9.00	11.10	15.20
FPC-1.0FX-11PWBH20	11	10.00	12.10	16.20
FPC-1.0FX-12PWBH20	12	11.00	13.10	17.20
FPC-1.0FX-13PWBH20	13	12.00	14.10	18.20
FPC-1.0FX-14PWBH20	14	13.00	15.10	19.20
FPC-1.0FX-15PWBH20	15	14.00	16.10	20.20
FPC-1.0FX-16PWBH20	16	15.00	17.10	21.20
FPC-1.0FX-17PWBH20	17	16.00	18.10	22.20
FPC-1.0FX-18PWBH20	18	17.00	19.10	23.20
FPC-1.0FX-19PWBH20	19	18.00	20.10	24.20
FPC-1.0FX-20PWBH20	20	19.00	21.10	25.20
FPC-1.0FX-21PWBH20	21	20.00	22.10	26.20
FPC-1.0FX-22PWBH20	22	21.00	23.10	27.20
FPC-1.0FX-23PWBH20	23	22.00	24.10	28.20
FPC-1.0FX-24PWBH20	24	23.00	25.10	29.20
FPC-1.0FX-25PWBH20	25	24.00	26.10	30.20
FPC-1.0FX-26PWBH20	26	25.00	27.10	31.20
FPC-1.0FX-27PWBH20	27	26.00	28.10	33.20
FPC-1.0FX-28PWBH20	28	27.00	29.10	34.20
FPC-1.0FX-29PWBH20	29	28.00	30.10	35.20
FPC-1.0FX-30PWBH20	30	29.00	31.10	36.20
FPC-1.0FX-31PWBH20	31	30.00	32.10	37.20

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 1.0mm间距C型翻盖式下接
DECIMALS:	ANGLES:		PAR FPC-1.0FX-NPWBH20
.X:±0.38	.X':±5°		DWN
.XX:±0.20	.XX':±3°		CHKD
.XXX:±0.05	.XXX':±1°	APVD	SCALE1:1 UNIT:MM
CUSTOMER COPY		SIZE:A4	UNIT:MM SHEET:1F1 REV:A