IXYS

Advanced Technical Information


HiPerFET™ Power MOSFETs Q-Class

IXFH 36N55Q
IXFT 36N55Q

V_{DSS} = 550 V
I_{D25} = 36 A
$R_{DS(on)}$ = 0.16 Ω

$t_{rr} \leq 250$ ns


N-Channel Enhancement Mode
Avalanche Rated, Low Q_g, High dv/dt




Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	550	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ	550	V
V_{GS}	Continuous	±30	V
V_{GSM}	Transient	±40	V
I_{D25}	T_C = 25°C	36	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	148	A
I_{AR}	T_C = 25°C	36	A
E_{AR}	T_C = 25°C	50	mJ
E_{AS}		2.0	mJ
dv/dt	$I_S \leq I_{DM}$, di/dt ≤ 100 A/µs, $V_{DD} \leq V_{DSS}$, $T_J \leq 150$°C, R_G = 2 Ω	20	V/ns
P_D	T_C = 25°C	500	W
T_J		-55 to +150	°C
T_{JM}		150	°C
T_{stg}		-55 to +150	°C
T_L	1.6 mm (0.063 in) from case for 10 s	300	°C
M_d	Mounting torque	1.13/10	Nm/lb.in.
Weight	TO-247	6	g
	TO-268	4	g

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
V_{DSS}	V_{GS} = 0 V, I_D = 250 µA	550			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 4 mA	2.5		4.5	V
I_{GSS}	V_{GS} = ±30 V_{DC}, V_{DS} = 0			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, T_J = 25°C			25	µA
	V_{GS} = 0 V, T_J = 125°C			1	mA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5\ I_{D25}$ Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			0.16	Ω

TO-247 AD (IXFH)



TO-268 (D3) (IXFT)



G = Gate D = Drain
S = Source TAB = Drain

Features

- IXYS advanced low Q_g process
- Low gate charge and capacitances
  - easier to drive
  - faster switching
- International standard packages
- Low $R_{DS\ (on)}$
- Rated for unclamped Inductive load switching (UIS) rated
- Molding epoxies meet UL 94 V-0 flammability classification

Advantages

- Easy to mount
- Space savings
- High power density


© 2003 IXYS All rights reserved

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
g_{fs}	V_{DS} = 20 V; I_D = 0.5 • I_{D25}, pulse test	22	33		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		4500		pF
C_{oss}			600		pF
C_{rss}			160		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25} R_G = 2.0 Ω (External),		17		ns
t_r			18		ns
$t_{d(off)}$			54		ns
t_f			15		ns
$Q_{g(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		128		nC
Q_{gs}			26		nC
Q_{gd}			56		nC
R_{thJC}				0.25	K/W
R_{thCK}	(TO-247)		0.25		K/W

Source-Drain Diode

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			36	A
I_{SM}	Repetitive; pulse width limited by T_{JM}			148	A
V_{SD}	$I_F = I_S$, V_{GS} = 0 V, Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			1.5	V
t_{rr}	I_F = 25A, -di/dt = 100 A/µs, V_R = 100 V			250	ns
Q_{RM}			1.0		µC
I_{RM}			10		A


TO-247 AD (IXFH) Outline



Terminals:
1 - Gate
2 - Drain
3 - Source
Tab - Drain

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
∅P	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15	BSC	242	BSC

TO-268 Outline

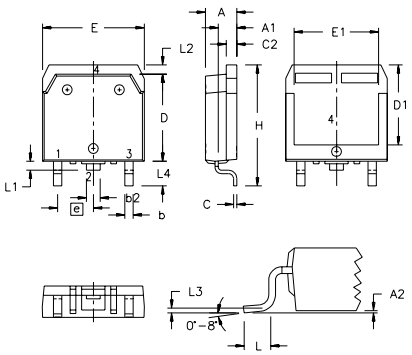

Terminals: 1 - Gate 2 - Drain
3 - Source Tab - Drain

SYM	INCHES MIN	MAX	MILLIMETERS MIN	MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
e	.215 BSC		5.45 BSC	
H	.736	.752	18.70	19.10
L	.094	.106	2.40	2.70
L1	.047	.055	1.20	1.40
L2	.039	.045	1.00	1.15
L3	.010 BSC		0.25 BSC	
L4	.150	.161	3.80	4.10

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343

Fig. 1. Output Characteristics @ 25 Deg. C

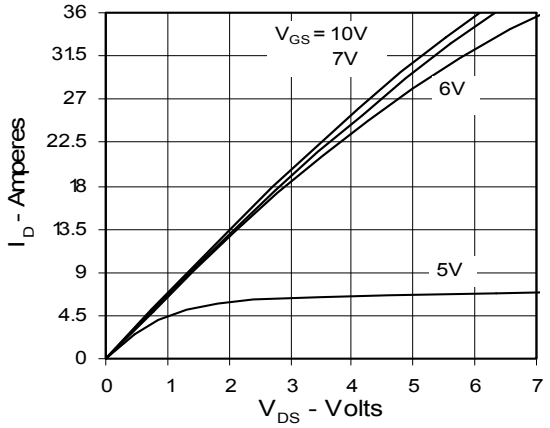


Fig. 2. Extended Output Characteristics @ 25 deg. C

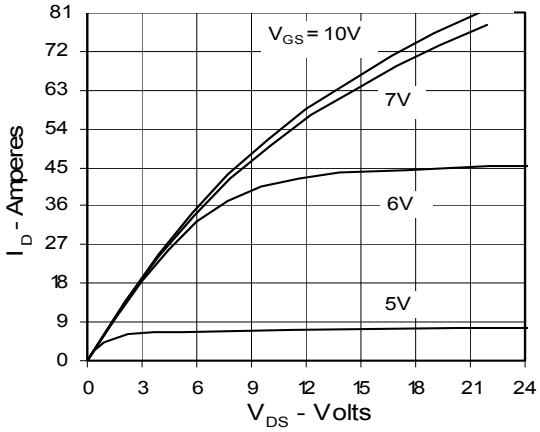


Fig. 3. Output Characteristics @ 125 Deg. C

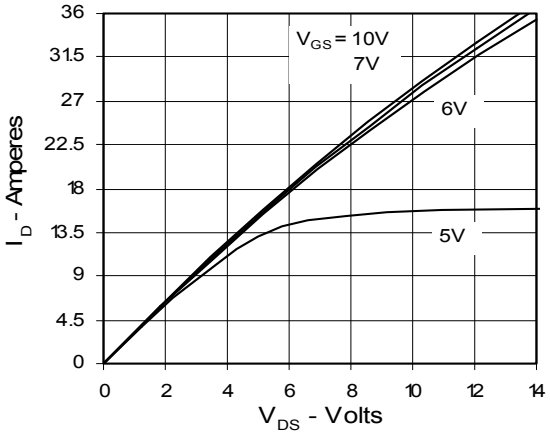


Fig. 4. $R_{DS(on)}$ Normalized to I_{D25} Value vs. Junction Temperature

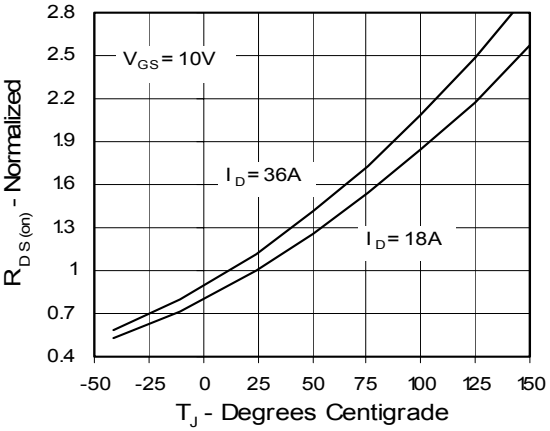


Fig. 5. $R_{DS(on)}$ Normalized to I_{D25} Value vs. I_D


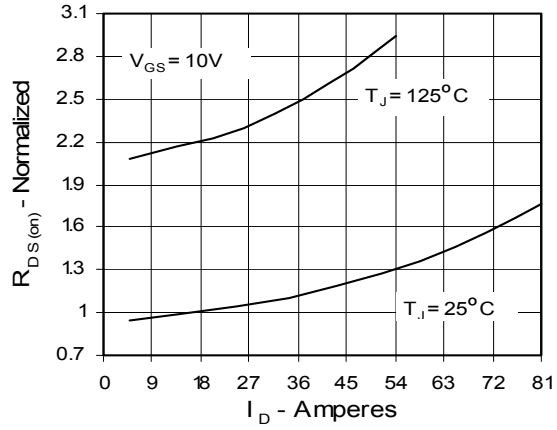


Fig. 6. Drain Current vs. Case Temperature

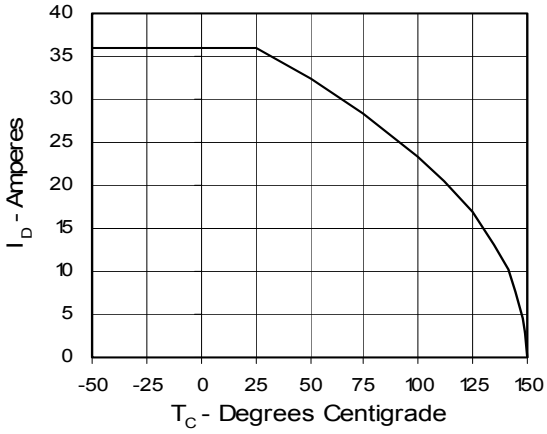

© 2003 IXYS All rights reserved

Fig. 7. Input Admittance

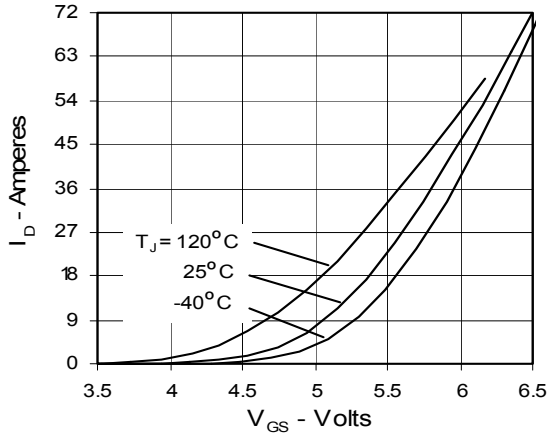


Fig. 8. Transconductance

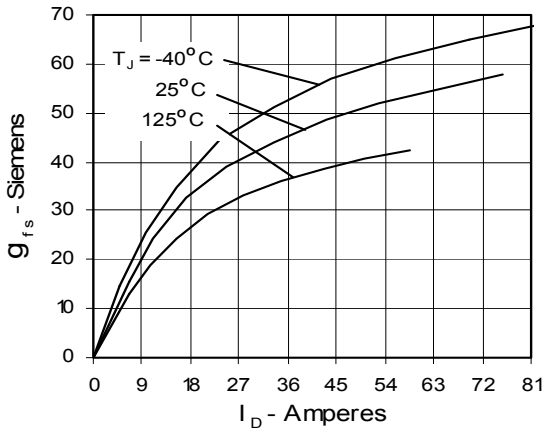


Fig. 9. Source Current vs. Source-To-Drain Voltage

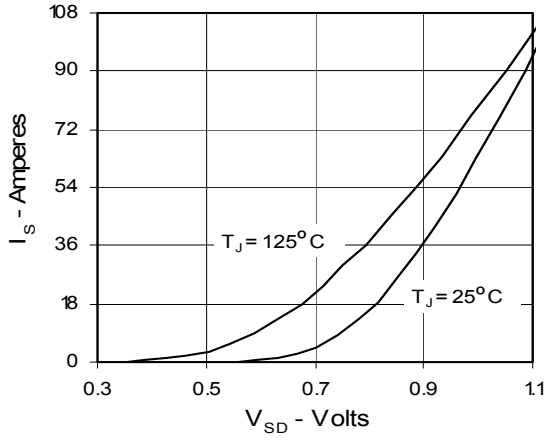


Fig. 10. Gate Charge

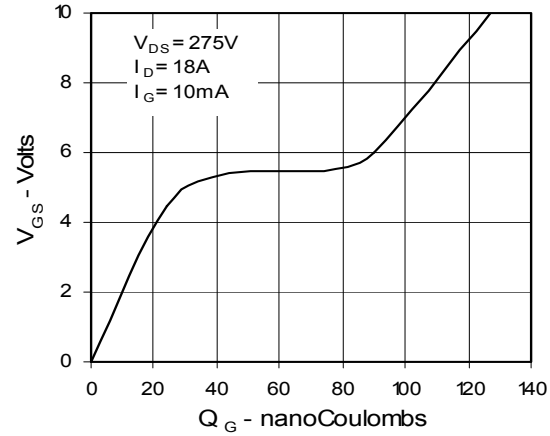


Fig. 11. Capacitance


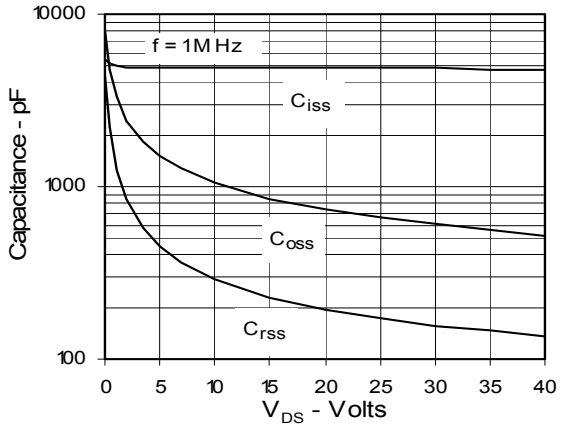


Fig. 12. Maximum Transient Thermal Resistance

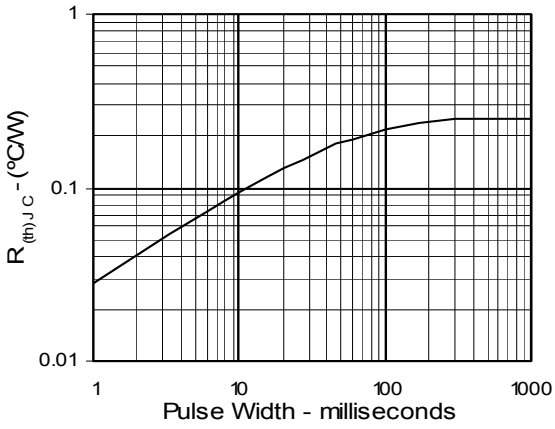

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:
4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1
4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343