Extract from the online catalog

PST 1,3/10-5,0

Order No.: 1933260

The figure shows a 10-position version of the product



http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1933260

Header, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 10, Color: black, Assembly: Soldering

Product notes

WEEE/RoHS-compliant since: 01/01/2003

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data	
EAN	4017918918750
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.001743 KG
Catalog page information	Page 480 (CC-2009)

Technical data

Dimensions / positions

Length	2.8 mm
Pitch	5 mm
Dimension a	45 mm
Number of positions	10
Pin dimensions	1,3 mm

Hole diameter	1.5 mm

Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A (depends on the plug used)
Nominal voltage U_N	250 V
Maximum load current	12 A (depends on the plug used)
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals

Certification	CCA, CUL, GOST, SEV, UL

CUL


Nominal voltage U_N	300 V
Nominal current I_N	10 A

UL


Nominal voltage U_N	300 V
Nominal current I_N	10 A


Diagrams/Drawings

Drilling plan/solder pad geometry

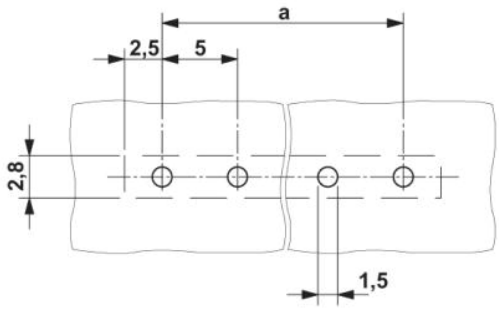


Diagram

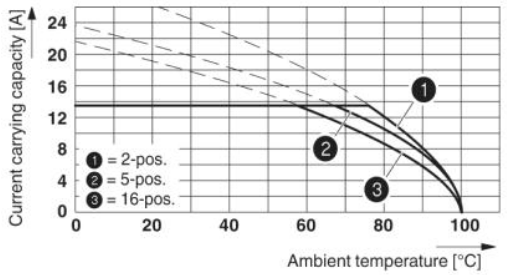

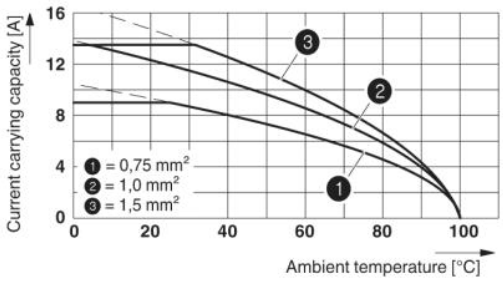

Dimensioned drawing

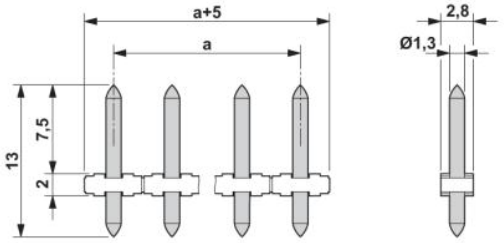

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057,USA
Phone (800) 888-7388
Fax (717) 944-1625
http://www.phoenixcon.com

© 2010 Phoenix Contact
Technical modifications reserved;