



1. Mechanical Dimensions:

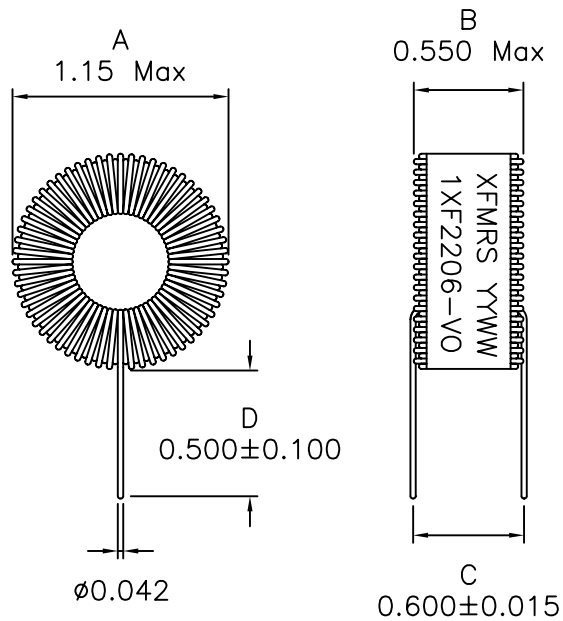

2. Schematic:



3. Electrical Specifications:

Inductance: 220uH±10% @10KHz,1.0V

DC Resistance: 0.040 Ohms Typ

Irms: 3.0Adc (Based on 20% drop in OCL)

Ipk: 5.0Adc

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C
6. Tinned length is the same as the lead length.

DOC. REV. A/3

| | | |
|--|--------------------------|-------------------|
| XFMRS Inc. | Title: TOROIDAL INDUCTOR | |
| | P/N: 1XF2206-VO | REV. A |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch | DWN. | 廖玉坤 Oct-2-01 |
| | CHK. | 李清儿 Oct-2-01 |
| | APP. | Joe Huff Oct-2-01 |