
CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

5644 Series T-1 3/4 Right Angle 4 Wide LED Assembly

DESCRIPTION AND FEATURES

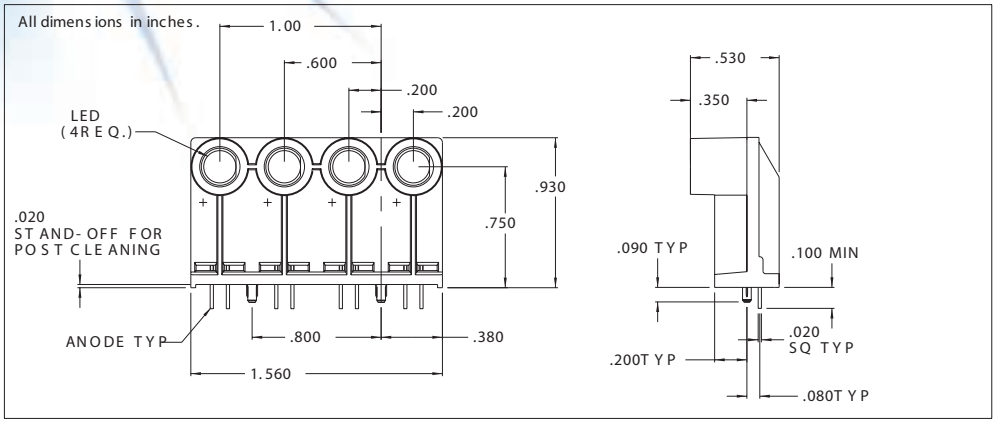

Features

- Quad assembly with 4 LEDs permits easy installation, assures matched height and center to center spacing, reduces assembly time and costs.
- Super Brite LEDs
- Unique light shield feature eliminates light bleed from adjacent LEDs.
- Standoffs prevent flux entrapment.

Housing: Black Nylon, UL94V-O

Alternate LEDs are also available in this package as a standard variation.

Mounting hole pattern on page 1-X6.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Reverse Break-down Voltage Min. (V)	Peak Wavelength (nm)
5644H1	Red	68	20	60	2.1	3.0	5	650
5644H5	Green	100	20	60	2.2	3.0	5	563
5644H7	Yellow	160	20	60	2.2	3.0	5	585

CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

America:
CML Innovative Technologies,Inc.
147 Central Avenue
Hackensack -NJ 07601 -USA
Tel:1-201-489 -8989
Fax:1-201-489 -6911
e-mail:americas@cml-it.com

Europe:
CML Technologies GmbH &Co.KG
Robert-Bunsen-Str.1
67098 Bad Dürkheim -GERMANY
Tel:+49 (0)6322 9567-0
Fax:+49 (0)6322 9567-88
e-mail:europe@cml-it.com

Asia:
CML Innovative Technologies,Inc.
61 Aida Street
Singapore 459975
Tel:(65)9630 -5003
e-mail:asia@cml-it.com

CML-IT reserves the right to make specification revisions that enhance the design and/or performance of the product