

SANYO

No.3012

2SA1683/2SC4414

PNP/NPN Epitaxial Planar Silicon Transistors

Low-Frequency General-Purpose Amp,
Low-Frequency Power Amp Applications**Features**

- Adoption of FBET process
- High breakdown voltage: $V_{CEO} > 80V$

(): 2SA1683

Absolute Maximum Ratings at $T_a = 25^\circ C$



			unit
Collector to Base Voltage	V_{CBO}	(-)100	V
Collector to Emitter Voltage	V_{CEO}	(-)80	V
Emitter to Base Voltage	V_{EBO}	(-)5	V
Collector Current	I_C	(-)500	mA
Collector Current (Pulse)	I_{CP}	(-)800	mA
Base Current	I_B	(-)100	mA
Collector Dissipation	P_C	300	mW
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature	T_{stg}	-55 to +150	$^\circ C$

Electrical Characteristics at $T_a = 25^\circ C$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = (-)60V, I_E = 0$			(-)0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = (-)4V, I_C = 0$			(-)0.1	μA
DC Current Gain	$h_{FE}(1)$	$V_{CE} = (-)5V, I_C = (-)50mA$	100*		400*	
	$h_{FE}(2)$	$V_{CE} = (-)5V, I_C = (-)400mA$	60			
Gain-Bandwidth Product	f_T	$V_{CE} = (-)10V, I_C = (-)10mA$		120		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)400mA, I_B = (-)40mA$	(-)0.20	0.16	(-)0.5	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)400mA, I_B = (-)40mA$	(-)0.9	(-)1.2		V
Output Capacitance	c_{ob}	$V_{CB} = (-)10V, f = 1MHz$		(7)5		pF
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	(-)100			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-)80			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu A, I_C = 0$	(-)5			V
Turn-ON Time	t_{on}	See specified Test Circuit.		50		ns
Storage Time	t_{stg}	"		(500)650		ns
Fall Time	t_f	"		(80)90		ns

*: The 2SA1683/2SC4414 are classified by 50mA h_{FE} as follows:

100	R	200	140	S	280	200	T	400
-----	---	-----	-----	---	-----	-----	---	-----

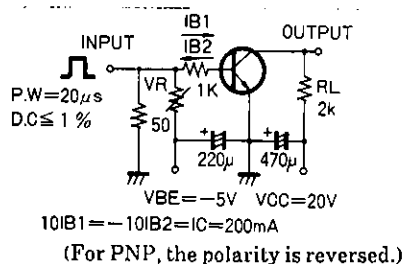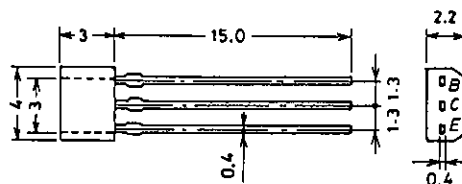Switching Time Test Circuit**Package Dimensions 2033**
(unit: mm)









B: Base
C: Collector
E: Emitter

SANYO: SPA









SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

5189MO, TS No.3012-1/4

2SA1683/2SC4414

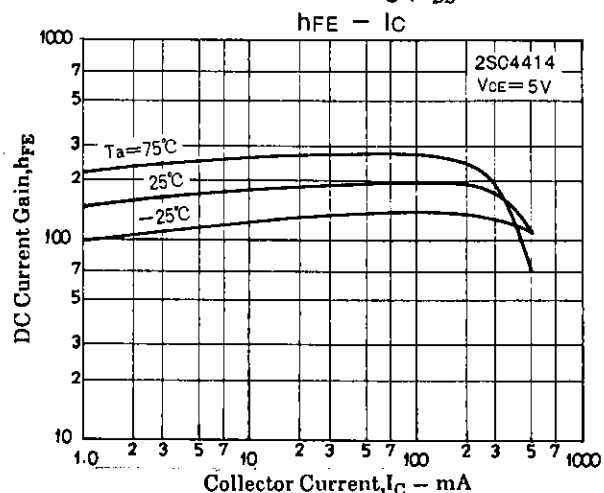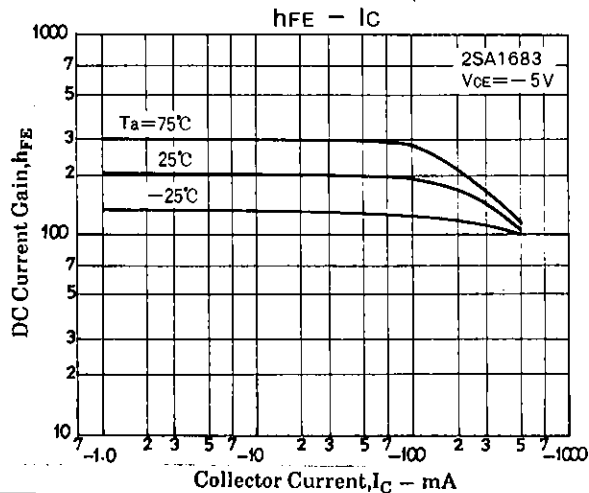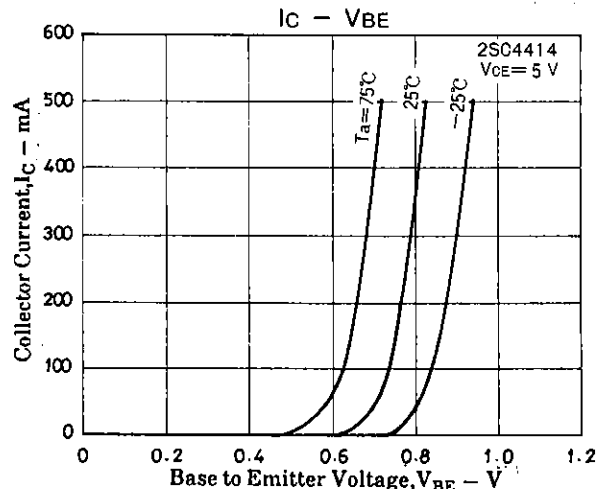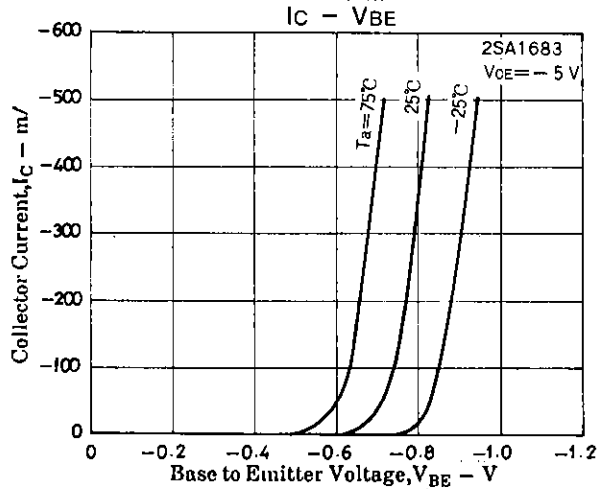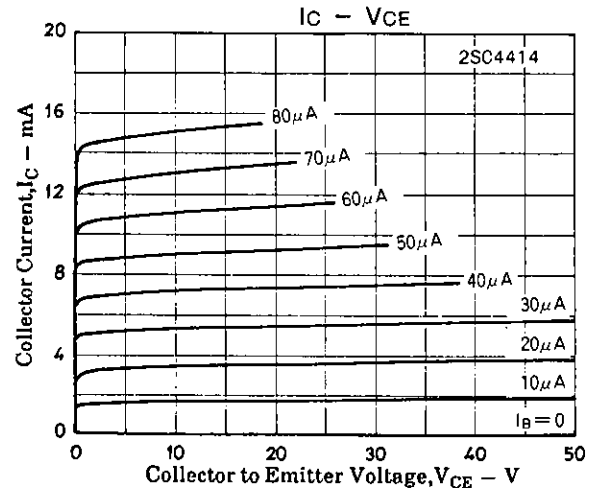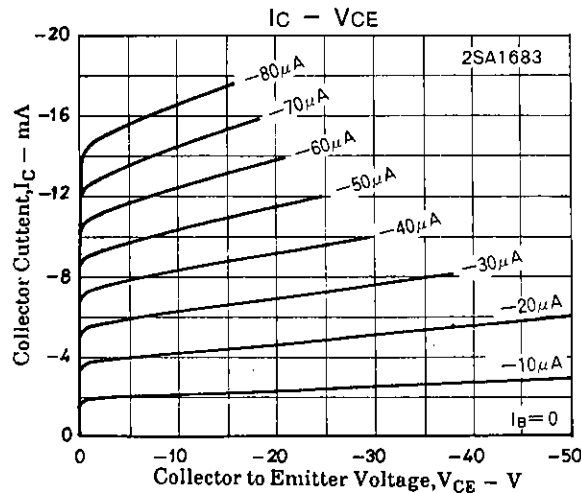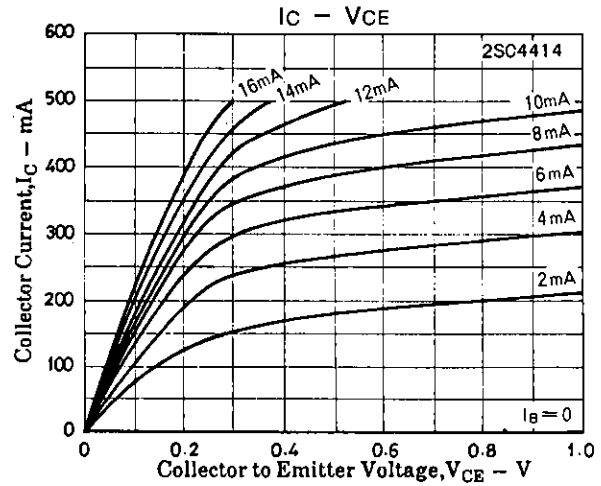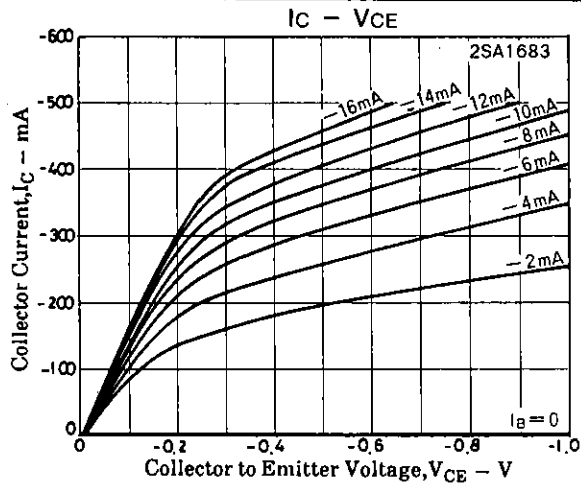

2SA1683/2SC4414

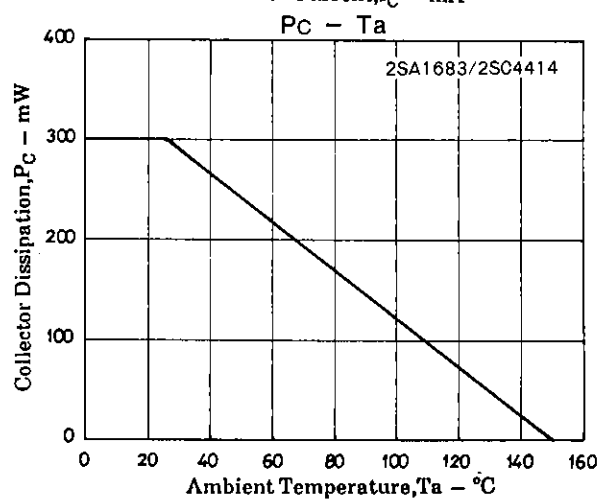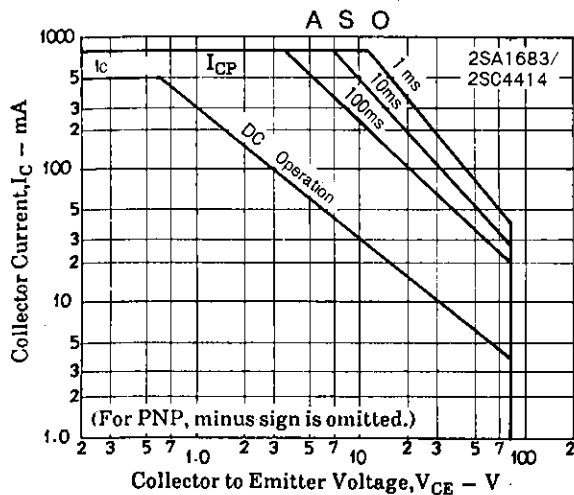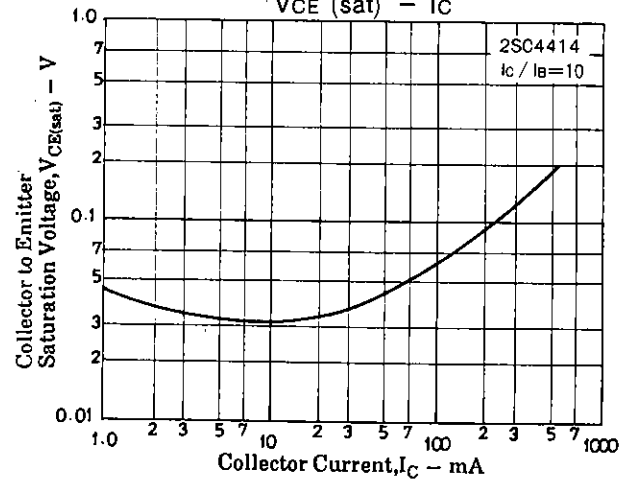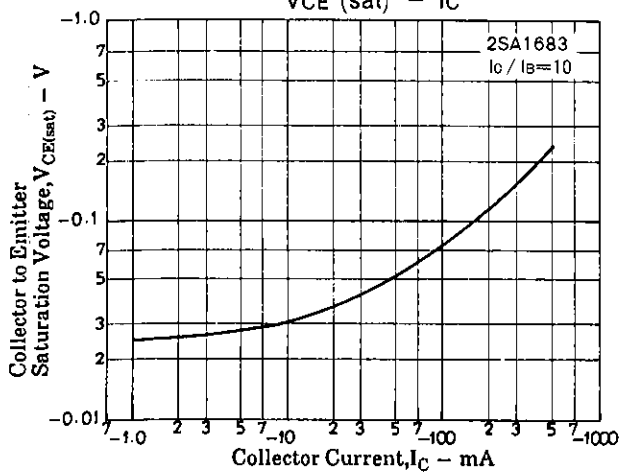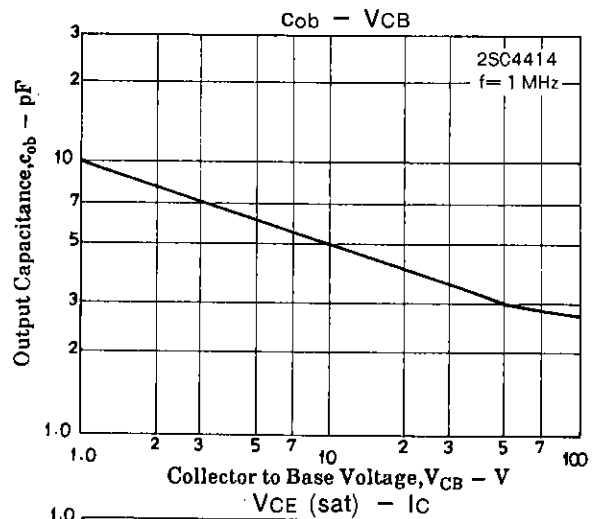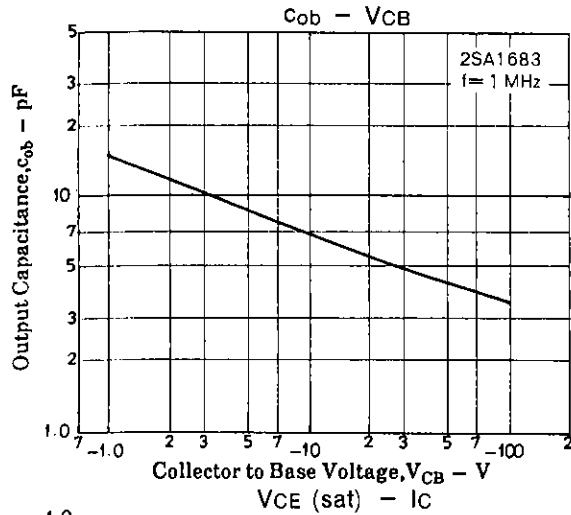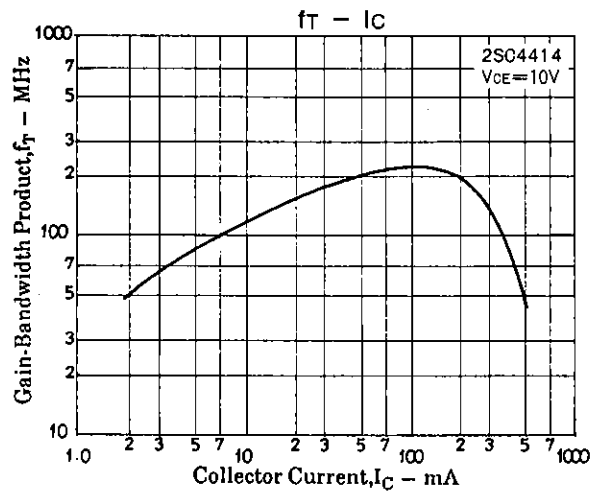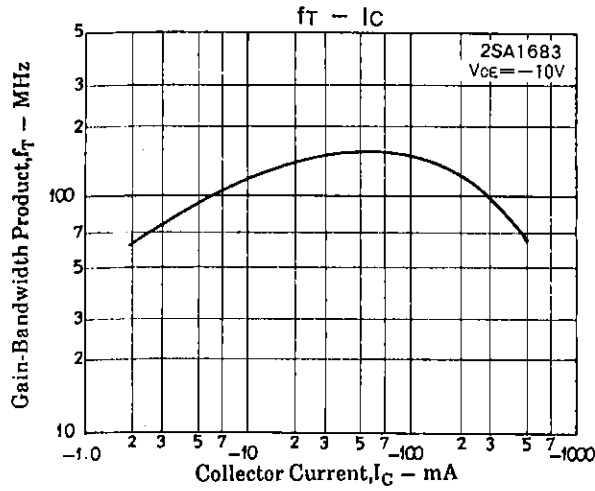

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.