
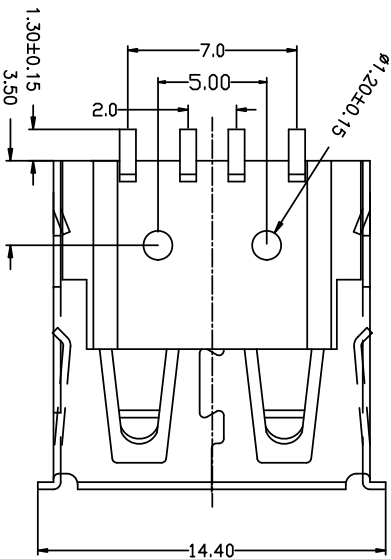

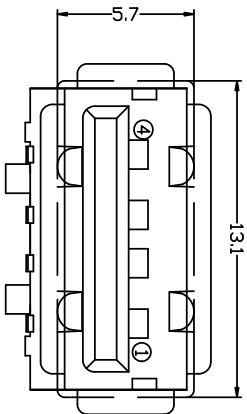


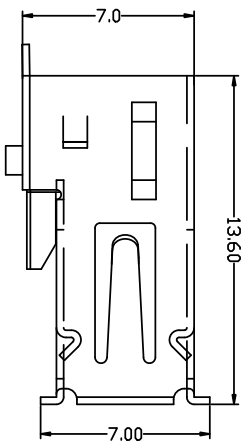

PCB LAYOUT

MAPX	MODIFICATION	DATE
------	--------------	------

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC

- 接触阻抗:Contact Resistance
30 milliohms MAX

- 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea level

- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:0.7kgf (MIN)
- 端子保持力: Terminal Retenion
1.2kgf (MIN)

- 寿命: 1500次

原材料:Matorial:

- 塑胶:Housing:ICP 本色
- 端子>Contact:Copper Alloy C2680
- 外壳:Shell:SPCC

电镀:Finish:

- 端子Contact:Au 0.7u" Plated on contact area
Tin50u" Plated on solder area
- Nickel 50u" Plated underplating over all.
- 外壳Shell: Nickel 50u"Min plating over all.

深圳市精拓金电子有限公司

产品图		公差一览表		单位		制图		制图料号	
Pin NUMBER	SIGNAL NAME	TOLERANCE UNLESS OTHERWISE		UNITS	SCALE	DRAWING	审核	产品名称	版本
1	VBUS	±0.30	±5.°	MM	1:1	林属升	郭志富	904-331B2032S10200	无脚贴板有边内弹壳壳反向
2	D-	±0.25	±2.°						ICP本色1.2注
3	D+	±0.15	±1.°						
4	GND	±0.10	±0.5°						