



478LBB080M2CH

SNAP-IN/ SNAP MOUNT

Parts are RoHS compliant

Date code when parts became RoHS: 26

ELECTRICAL SPECIFICATIONS

Capacitance: 4700 μ F

Dissipation Factor: 0.15 Max at 120 Hz and 20°C

Temperature Range: -40°C to +85°C

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 80 Volts DC

SVDC: 100 Volts DC

Ripple Current: 4.05 A at 120 Hz and 85°C

Impedance Ratios: -25°C/20°C 2 and -40°C/20°C - 5

Leakage Current: .02CV or 3000 μ A, whichever is less
3000 μ A after 5 Minutes

Load Life: 3000 hours at 85°C with 100 % of rated voltage and with 100 % of rated ripple current

Capacitance Change: $\leq$ 20% of initial measured value

Dissipation Factor: $\leq$ 200% of maximum specified value

Leakage Current: $\leq$ 100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.9	1	1	1.15	1.25	1.25

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2.5	2.2	2	2.1	1.7	1.7	1	0

PHYSICAL DIMENSIONS

Diameter (D): 25 mm + 1 mm

Length (L): 50 mm + 2 mm


Lead Spacing (S): 10 mm +/- 0.1 mm

Coating: BlackPET sleeving

Lead Wire Diameter (d): 1.5 mm +/- 0.5 mm

Lead Length: 4 mm +/- .5 mm

Lead Finish: Matte Tin

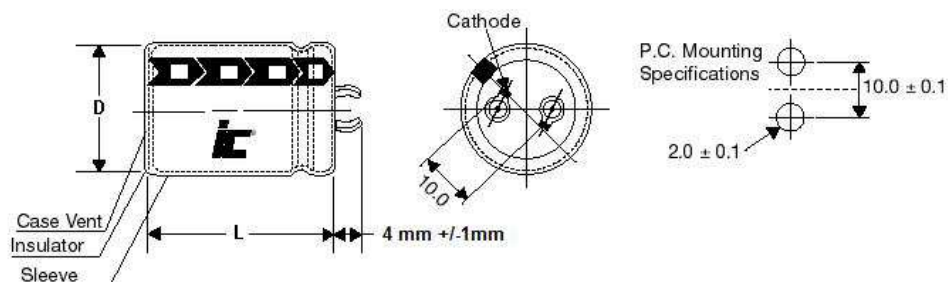

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.ilcap.com.hk
© Copyright 2019 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved