

860nm 1A194 High-Performance LED

Datacom, General Purpose

This device is designed for Ethernet and general applications and offers an excellent price/performance ratio for cost-effective solutions. Its double-lens optical system results in optimum coupling of power into the fiber.

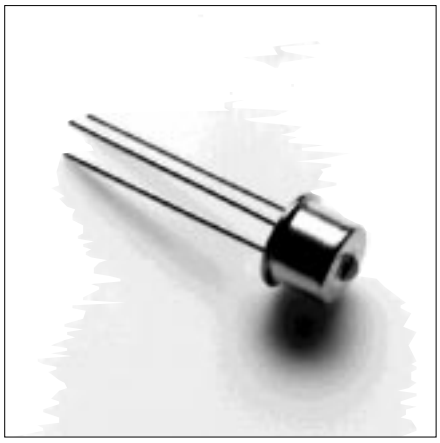

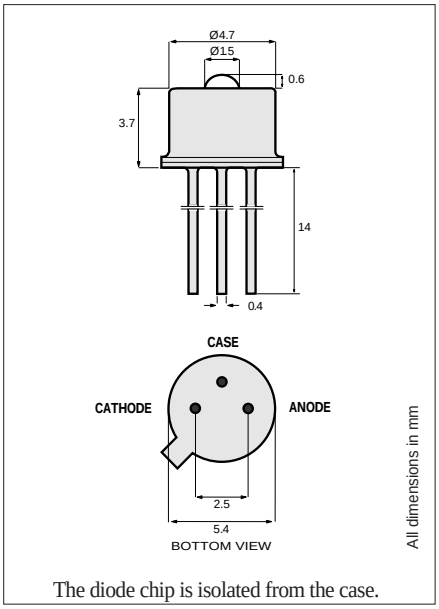

The diode chip is isolated from the case.

TO-46 Package With Lens

Optical and Electrical Characteristics (25° C Case Temperature)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	
Fiber-Coupled Power (Fig.1, 2, & 3) (Table 1)	P_{fiber}	25	45		µW	I_F=60 mA (Note 1)	Fiber: 50/125µm Graded Index NA=0.20
Rise and Fall Time (10-90%)	t_r, t_f		5	7	ns	I_F=60 mA (no bias)	
Bandwidth ($3dB_{el}$)	f_c		70		MHz	I_F=60 mA	
Peak Wavelength	λ_p	840	860	880	nm	I_F=60 mA	
Spectral Width (FWHM)	$\Delta\lambda$		50		nm	I_F=60 mA	
Forward Voltage (Fig.5)	V_F		1.7	1.9	V	I_F=60 mA	
Reverse Current	I_R			20	µA	V_R=1V	
Capacitance	C		250		pF	V_R=0V, f=1 MHz	

Note 1: Measured at the exit of 100 meters of fiber.

Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Storage Temperature	T_{stg}	-55 to +125°C
Operating Temperature (derating: Fig.4)	Top	-55 to +125°C
Electrical Power Dissipation (derating: Fig.4)	P_{tot}	160 mW
Continuous Forward Current (f≤10 kHz)	I_F	80 mA
Peak Forward Current (duty cycle≤50%, f≥1 MHz)	I_{FRM}	130 mA
Reverse Voltage	V_R	1.5 V
Soldering Temperature (2mm from the case for 10 sec)	T_{sld}	260°C

Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink	R_{thjc}			200	°C/W
Thermal Resistance - No Heat Sink	R_{thja}			500	°C/W
Temperature Coefficient - Optical Power	dP/dT_j		-0.5		%/°C
Temperature Coefficient - Wavelength	$d\lambda/dT_j$		0.3		nm/°C

11865.11 1994-09-20

MITEL SEMICONDUCTOR

Europe: Tel **(46) 8 58 02 45 00** Fax **(46) 8 58 02 01 10**
Tel **(44) 1291 436180** Fax **(44) 1291 436771**

America: Tel **1-800-96MITEL** Fax **(613) 592-6909**
Asia: Tel **(65) 293 5312** Fax **(65) 293 8527**

Typical Fiber-Coupled Power			
Core Diameter/Cladding Diameter Numerical Aperture			
50/125 µm 0.20	62.5/125 µm 0.275	100/140 µm 0.29	200/230 µm 0.37
45 µW	95 µW	210 µW	440 µW

Table 1

FIGURE 1

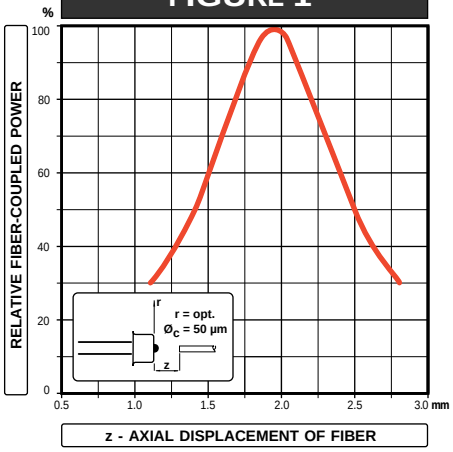


FIGURE 2

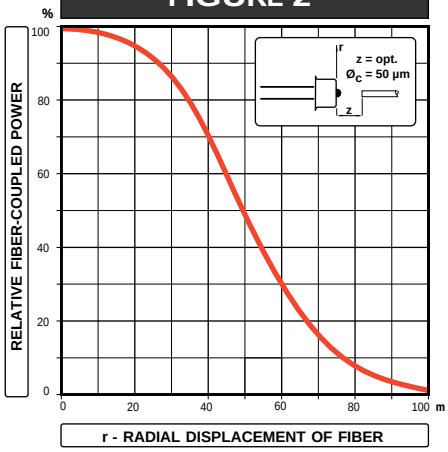


FIGURE 3

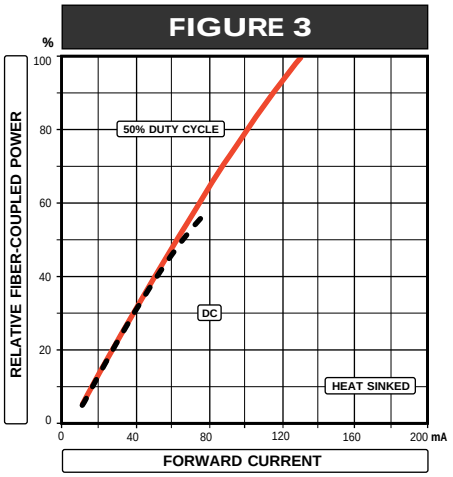


FIGURE 4



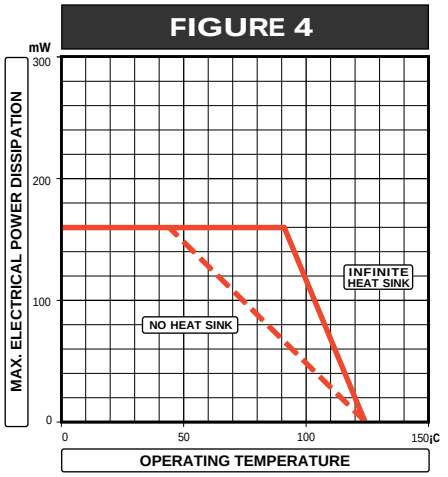



FIGURE 5

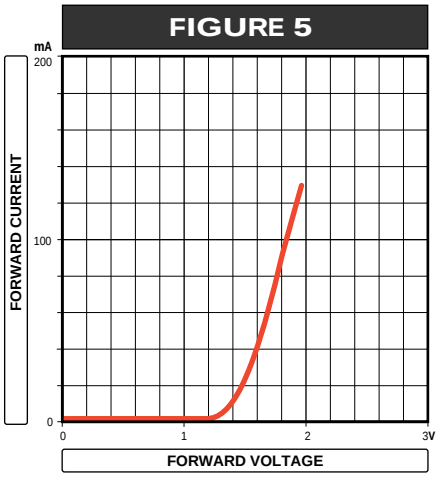


Clip for SC-2A

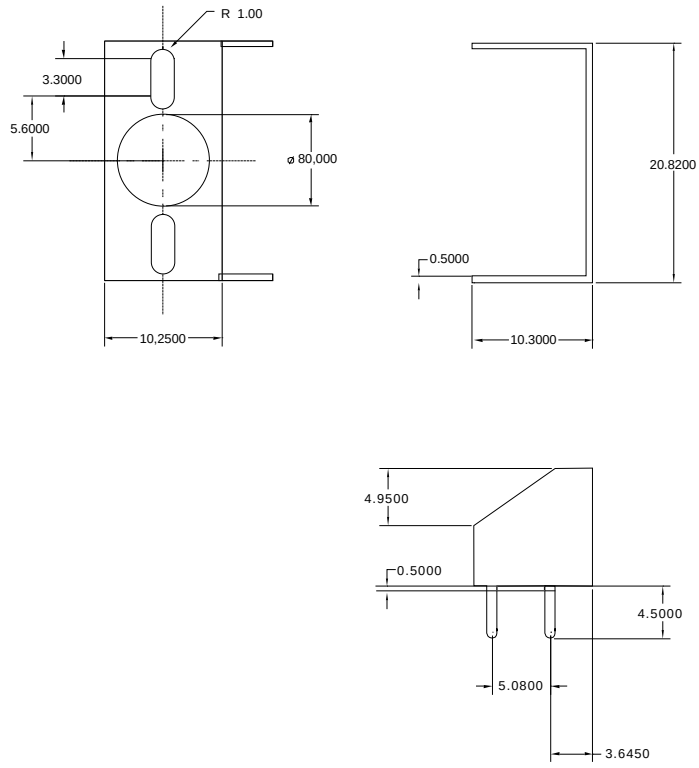

Clip for Pigtail-3A

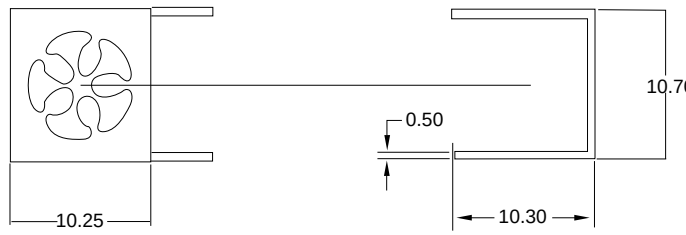


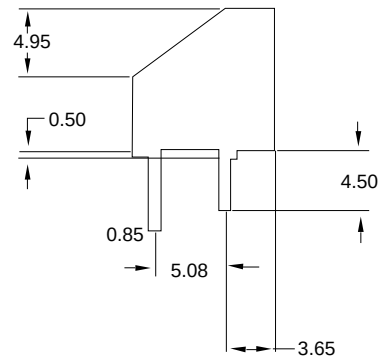

ST-2A
Package

Emitter or Detector in ST® Package

Mitel emitters and detectors can be provided in this low-profile ST® package. The device is electrically isolated from the ST® receptacle to facilitate electrical connection. And optimum fiber-coupled power or responsivity is ensured by active alignment against the fiber.

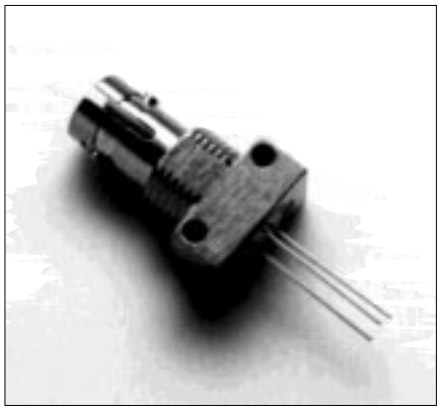

Absolute Maximum Ratings


PARAMETER	SYMBOL	LIMIT
Operating & Storage Temperature ST-2A (Note 1)	T_{stg}, T_{op}	-40 to +85°C

Note 1: Temperature range can be extended to -55° to +125°C on request.

Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink (Note 2)	R_{thcc}			40	°C/W
Thermal Resistance - No Heat Sink (Note 2)	R_{thca}			200	°C/W
Thermal Resistance - On PC Board (Note 2)	Rthca		80		°C/W

Note 2: Add R_{thjc} for emitter or detector to estimate the total thermal resistance.

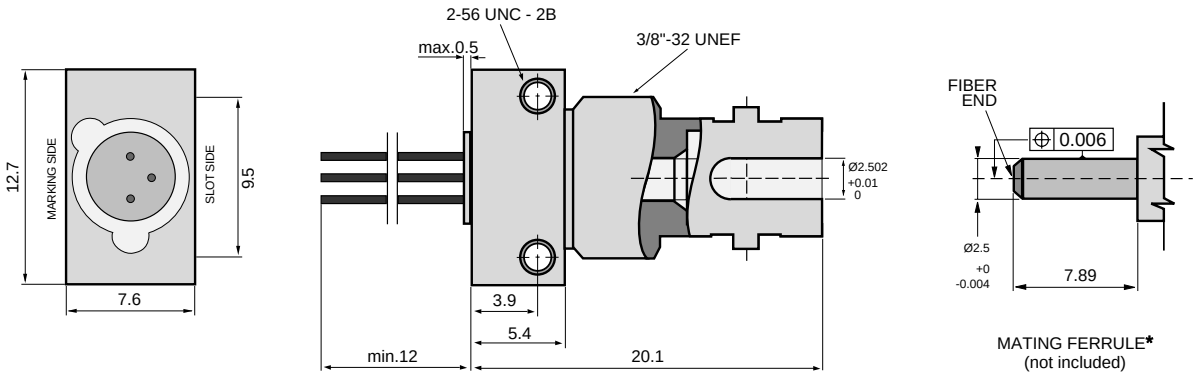

All Dimensions in mm

*The fiber-coupled power/responsivity is guaranteed to meet the LED/PIN data sheet - provided a ferrule meeting this specification is used.

Mechanical Outline of Diode in ST-2A Housing

(ST is a registered trademark of AT&T)

103326 1994-09-20

MITEL SEMICONDUCTOR


Europe: Tel **(46) 8 58 02 45 00** Fax **(46) 8 58 02 01 10**
Tel **(44) 1291 436180** Fax **(44) 1291 436771**

America: Tel **1-800-96MITEL** Fax **(613) 592-6909**
Asia: Tel **(65) 293 5312** Fax **(65) 293 8527**

SMA-2A
Package

Emitter or Detector in SMA Package

Mitel emitters and detectors can be provided in this low-profile SMA package. The device is electrically isolated from the SMA receptacle to facilitate electrical connection. And optimum fiber-coupled power or responsivity is ensured by active alignment against the fiber.

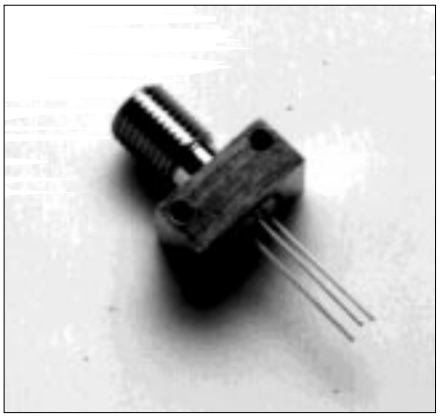

Absolute Maximum Ratings


PARAMETER	SYMBOL	LIMIT
Operating & Storage Temperature SMA-2A (Note 1)	T_{stg}, T_{op}	-40 to +85°C

Note 1: Temperature range can be extended to -55° to +125°C on request.

Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink (Note 2)	R_{thcc}			40	°C/W
Thermal Resistance - No Heat Sink (Note 2)	R_{thca}			200	°C/W
Thermal Resistance - On PC Board (Note 2)	Rthca		80		°C/W

Note 2: Add R_{thjc} for emitter or detector to estimate the total thermal resistance.

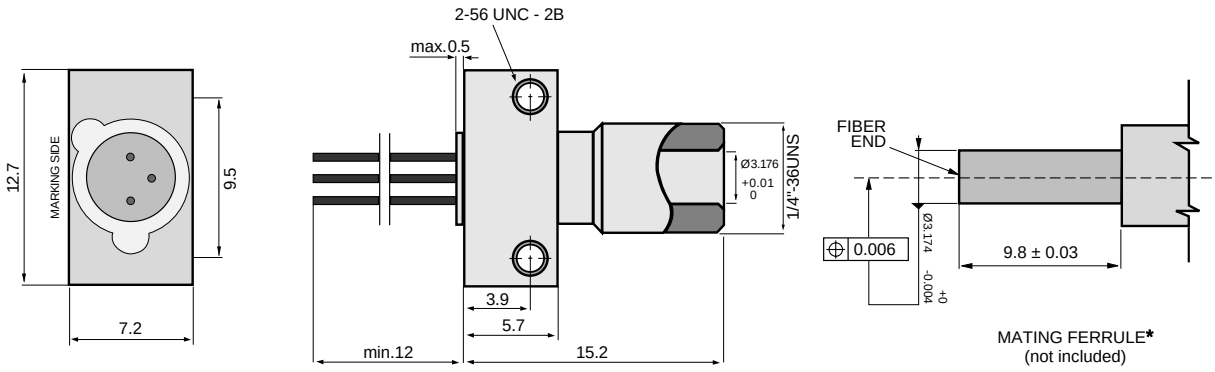

All Dimensions in mm

*The fiber-coupled power/responsivity is guaranteed to meet the LED/PIN data sheet - provided a ferrule meeting this specification is used.

Mechanical Outline of Diode in SMA-2A Housing

103325 1994-09-20

MITEL SEMICONDUCTOR


Europe: Tel **(46) 8 58 02 45 00** Fax **(46) 8 58 02 01 10**
Tel **(44) 1291 436180** Fax **(44) 1291 436771**

America: Tel **1-800-96MITEL** Fax **(613) 592-6909**
Asia: Tel **(65) 293 5312** Fax **(65) 293 8527**

SC-2A Package

Emitter or Detector in SC Package

Mitel emitters and detectors can be provided in this low-profile SC package. The device is electrically isolated from the SC receptacle to facilitate electrical connection. And optimum fiber-coupled power or responsivity is ensured by active alignment against the fiber..

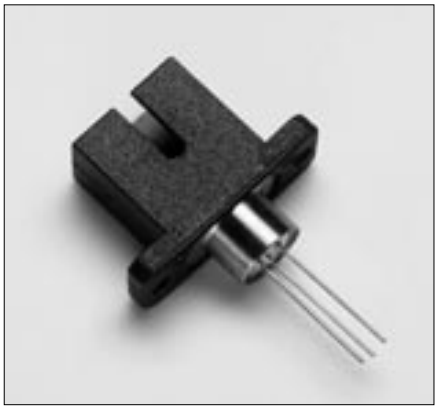


Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Operating & Storage Temperature	T_{stg}, T_{op}	-40 to +85°C

Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink (Note 1)	R_{thcc}			40	°C/W
Thermal Resistance - No Heat Sink (Note 1)	R_{thca}			200	°C/W
Thermal Resistance - On PC Board (Note 1)	Rthca		125		°C/W

Note 1: Add R_{thjc} for emitter or detector to estimate the total thermal resistance.

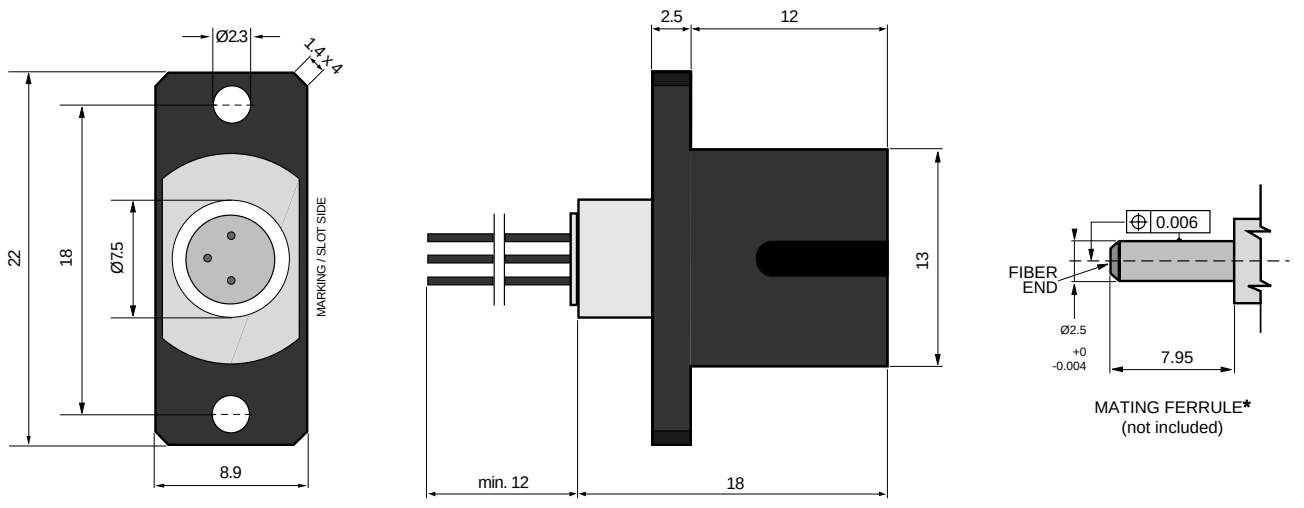

All Dimensions in mm

* The fiber-coupled power/responsivity is guaranteed to meet the LED/PIN data sheet - provided a ferrule meeting this specification is used.

Mechanical Outline of Diode in SC-2A Housing

105967 1994-09-20

MITEL SEMICONDUCTOR

Europe: Tel **(46) 8 58 02 45 00** Fax **(46) 8 58 02 01 10**
Tel **(44) 1291 436180** Fax **(44) 1291 436771**

America: Tel **1-800-96MITEL** Fax **(613) 592-6909**
Asia: Tel **(65) 293 5312** Fax **(65) 293 8527**

Pigtail-3A Package

Emitter or Detector in Pigtail Package

Mitel emitters and detectors can be provided in this pigtail package with a wide selection of fiber types. The device is electrically isolated from the pigtail receptacle to facilitate electrical connection. And optimum fiber-coupled power or responsivity is ensured by active alignment against the fiber. A special design maximizes the return loss for detectors in this package.



Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Operating & Storage Temperature (Note 1 & 2)	T_{stg}, T_{op}	-40 to +85°C

Note 1: Temperature range can be extended to -55/+125°C on request.
Note 2: Temperature range may be limited by the specification of the fiber.


Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink (Note 3)	R_{thcc}			25	°C/W
Thermal Resistance - No Heat Sink (Note 3)	R_{thca}			250	°C/W
Thermal Resistance - On PC-Board (Note 3)	R_{thca}		120		°C/W

Note 3: Add R_{thjc} for LED to estimate the total thermal resistance.

Optical Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Return Loss 10/125µm fiber (PIN only)	RL	40	55		dB

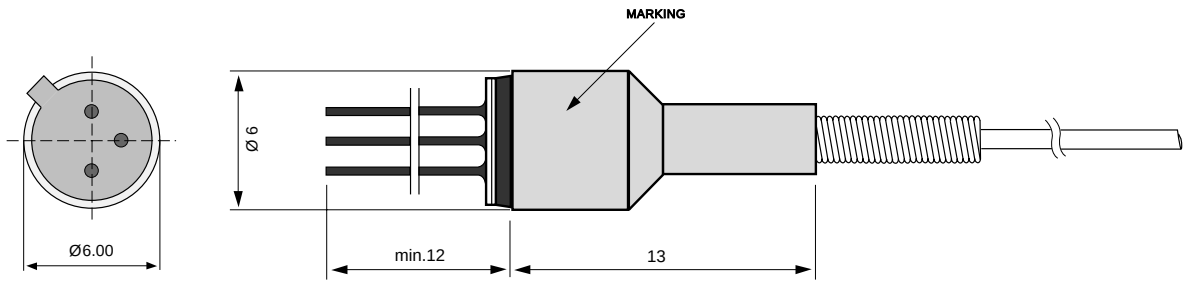

All Dimensions in mm

Mechanical Outline of Diode in PIGTAIL-3A Housing

105429 1997-07-03

MITEL SEMICONDUCTOR

Europe: Tel **(46) 8 58 02 45 00** Fax **(46) 8 58 02 01 10**
Tel **(44) 1291 436180** Fax **(44) 1291 436771**

America: Tel **1-800-96MITEL** Fax **(613) 592-6909**
Asia: Tel **(65) 293 5312** Fax **(65) 293 8527**

FC-2A Package

Emitter or Detector in FC Package

Mitel emitters and detectors can be provided in this low-profile FC package. The device is electrically isolated from the FC receptacle to facilitate electrical connection. And optimum fiber-coupled power or responsivity is ensured by active alignment against the fiber.



Absolute Maximum Ratings


PARAMETER	SYMBOL	LIMIT
Operating & Storage Temperature FC-2A (Note 1)	T_{stg}, T_{op}	-40 to +85°C

Note 1: Temperature range can be extended to -55° to +125°C on request.

Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink (Note 2)	R_{thcc}			40	°C/W
Thermal Resistance - No Heat Sink (Note 2)	R_{thca}			200	°C/W
Thermal Resistance - On PC Board (Note 2)	Rthca		80		°C/W

Note 2: Add R_{thjc} for emitter or detector to estimate the total thermal resistance.

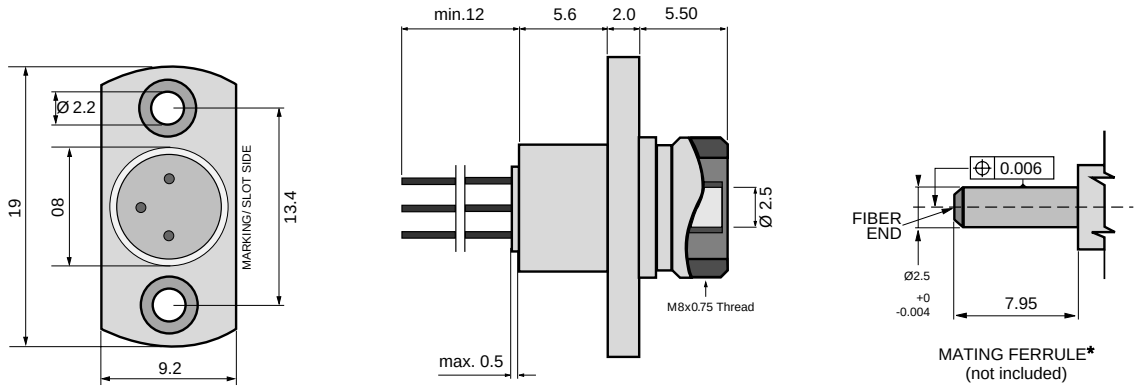

All Dimensions in mm

* The fiber-coupled power/responsivity is guaranteed to meet the LED/PIN data sheet - provided a ferrule meeting this specification is used.

Mechanical Outline of Diode in FC-2A Housing

105515 1994-09-20

MITEL SEMICONDUCTOR

Europe: Tel **(46) 8 58 02 45 00** Fax **(46) 8 58 02 01 10**
Tel **(44) 1291 436180** Fax **(44) 1291 436771**

America: Tel **1-800-96MITEL** Fax **(613) 592-6909**
Asia: Tel **(65) 293 5312** Fax **(65) 293 8527**



http://www.mitelsemi.com

World Headquarters - Canada
Tel: +1 (613) 592 2122
Fax: +1 (613) 592 6909

North America
Tel: +1 (770) 486 0194
Fax: +1 (770) 631 8213

Asia/Pacific
Tel: +65 333 6193
Fax: +65 333 6192

Europe, Middle East, and Africa (EMEA)
Tel: +44 (0) 1793 518528
Fax: +44 (0) 1793 518581

Information relating to products and services furnished herein by Mitel Corporation or its subsidiaries (collectively “Mitel”) is believed to be reliable. However, Mitel assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Mitel or licensed from third parties by Mitel, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Mitel, or non-Mitel furnished goods or services may infringe patents or other intellectual property rights owned by Mitel.

This publication is issued to provide information only and (unless agreed by Mitel in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Mitel without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user’s responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Mitel’s conditions of sale which are available on request.

M Mitel (design) and ST-BUS are registered trademarks of MITEL Corporation
Mitel Semiconductor is an ISO 9001 Registered Company
Copyright 1999 MITEL Corporation
All Rights Reserved
Printed in CANADA

TECHNICAL DOCUMENTATION - NOT FOR RESALE