



1. Mechanical Dimensions:

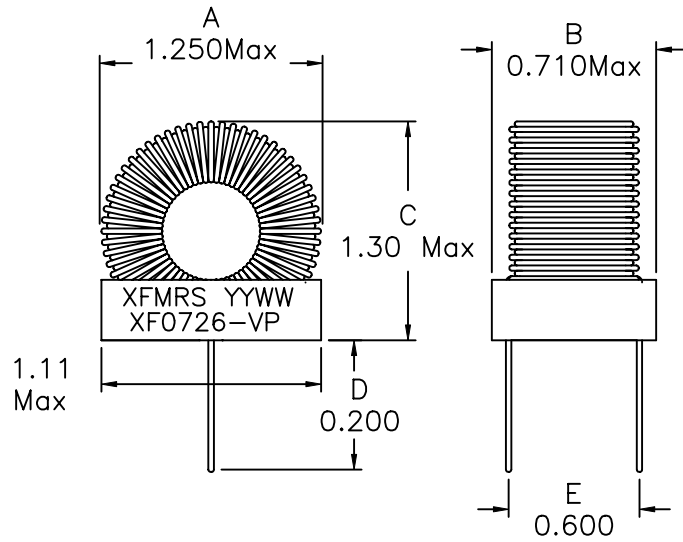

2. Schematic:



Core: Micrometals T106-52 or Equal

3. Electrical Specifications: @25°C

Inductance: 72uH±15% @10KHz 0.1V, 0Adc

Inductance: 68uH Typ @10KHz 0.1V, 5Adc

DC Resistance: 0.036 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC REV: A/1

XFMRs Inc.	Title: Toroid Inductor		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010	P/N: XF0726-VP		REV. A
	DWN.	廖玉坤	Mar-16-04
Dimensions in Inch	CHK.	李清儿	Mar-16-04
SHEET 1 OF 1	APP.	BW	Mar-16-04