

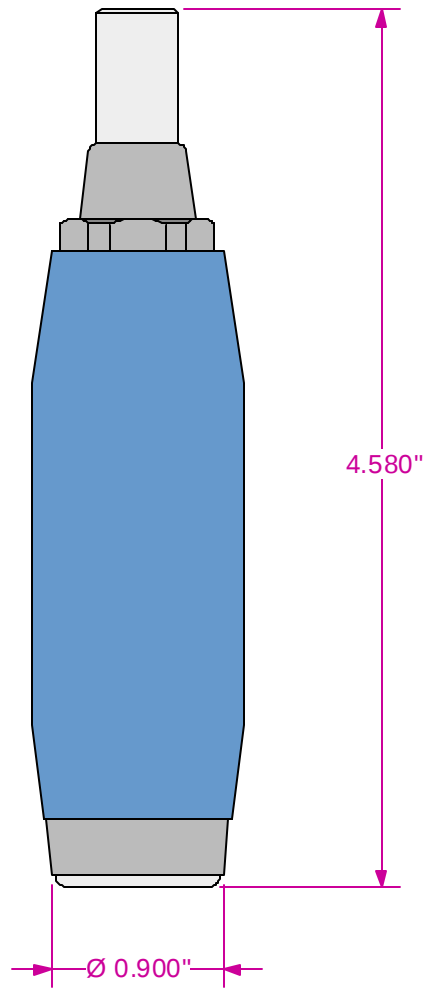




Side View

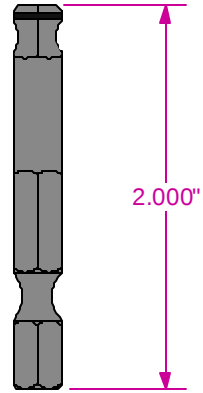

Bottom View



**Description:** Tool (TL), Torquedriver

Adjustable torquescrewdriver, Torque Range: 80-640 in. oz. [5 - 40 in. lb.], 1/4" hex female shank receiver, includes 5mm ball point bit, 3mm hex bit and 0.050" hex bit.

|                                                                                                                                                                                                                                                                            |                                  |                  |                  |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------|------------------|--------|
| <b>TL-Torquedriver-03 Drawing</b>                                                                                                                                                                                                                                          |                                  | Status: Released | Scale: 2:1       | Rev: C |
|  <p>© 2002 IRONWOOD ELECTRONICS, INC.<br/>PO BOX 21151 ST. PAUL, MN 55121<br/>Tele: (651) 452-8100<br/><a href="http://www.ironwoodelectronics.com">www.ironwoodelectronics.com</a></p> | Drawing by: E Smolentseva        |                  | Date: 10/08/02   |        |
|                                                                                                                                                                                                                                                                            | File: TL-Torquedriver-03 Dwg.mcd |                  | Modified: 4/8/04 |        |