
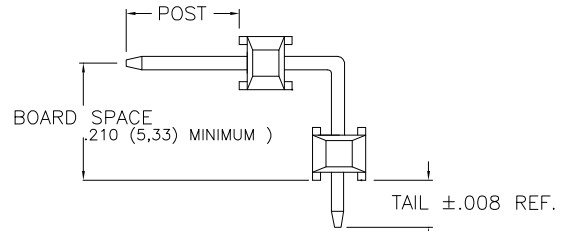
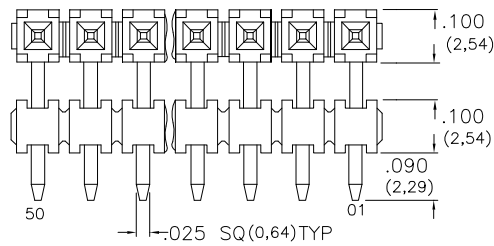
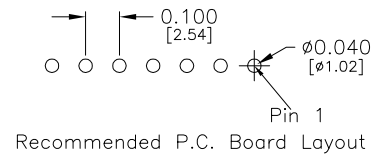



Major League Electronics .100 cl Board Stacker Terminal Strips - Right Angle Custom

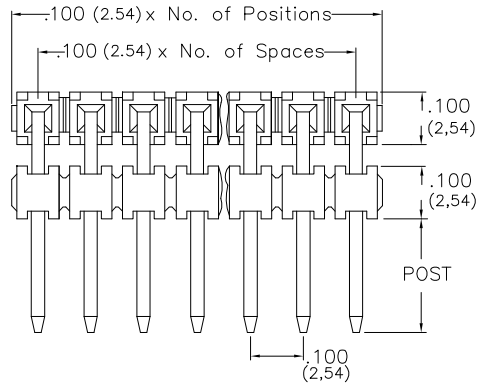

Tails may be clipped to achieve desired pin length

Length (L) – Board Space (B) – Tail Length (T) – .140 (3.56) = Post Height (P)

Ordering Information

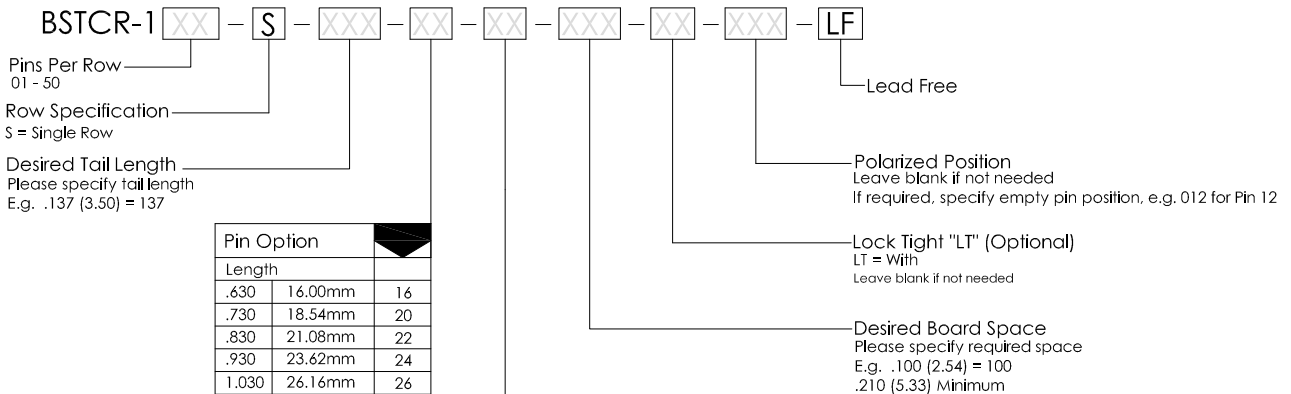

| Pin Option | | |
|------------|---------|----|
| Length | | |
| .630 | 16.00mm | 16 |
| .730 | 18.54mm | 20 |
| .830 | 21.08mm | 22 |
| .930 | 23.62mm | 24 |
| 1.030 | 26.16mm | 26 |
| 1.130 | 28.70mm | 28 |
| 1.230 | 31.24mm | 30 |
| 1.330 | 33.78mm | 32 |
| 1.430 | 36.32mm | 34 |
| 1.530 | 38.86mm | 36 |

| Plating Options | |
|-----------------|--|
| G | - 10µ Gold on Contact area/Flash on Tail |
| T | - Matte Tin all Over |
| GT | - 10µ Gold on Contact Area / Matte Tin on Tail |
| H | - 30µ Gold on Contact Area / Matte Tin on Tail |
| F | - Gold Flash over Entire Pin |

Specifications


Current Rating: 3.0 Ampere
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20 mΩ Max.
 Operating Temperature: -40°C to + 105°C
 Max. Process Temperature:
 Peak: 260°C up to 20 secs.
 Process: 230°C up to 60 secs.
 Wave: 260°C up to 6 secs.
 Manual Solder: 350°C up to 5 secs.

Materials

Contact Material: Phosphor Bronze
 Insulator Material: Nylon 6T
 Plating: Au or Sn over 50µ" (1.27) Ni

Mates with:

BCSS,
 BSSH,
 BSSHC,
 BSSQC,
 BSSQM,
 LBCSS,
 LSMBC,
 LSWSS,
 SMBC,
 SSHQ,
 SSHQR,
 SSHR,
 SSHS,
 SSHSM

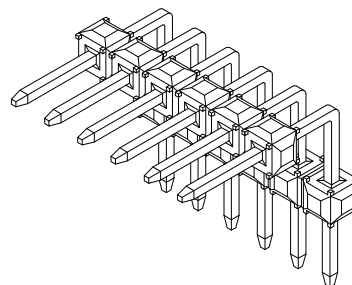

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

BSTCR-1-S SERIES

.100 cl Single Row - Right Angle
 Board Stacker Terminal Strips - Custom

05 JAN 07

Scale
 NTS

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS IN INCHES (MM)
 TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
 TWO PLACE DECIMALS ±.010
 THREE PLACE DECIMALS ±.005
 FOUR PLACE DECIMALS ±.0020
 ANGLES
 ±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA
 1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244
 Fax: 812-944-7268

E-mail: mle@mlelectronics.com
 Web: www.mlelectronics.com

Edition
 1

Sheet
 1/1