

DESCRIPTION


The SSF3620 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. This device is suitable for use as a load switch or in PWM applications.

GENERAL FEATURES


- $V_{DS} = 30V, I_D = 7A$
 $R_{DS(ON)} < 30m\Omega @ V_{GS}=4.5V$
 $R_{DS(ON)} < 18.5m\Omega @ V_{GS}=10V$
- High Power and current handling capability
- Lead free product
- Surface Mount Package

APPLICATIONS


- PWM applications
- Load switch
- Power management



Schematic Diagram



Marking and Pin Assignment



SOP-8 Top View

PACKAGE MARKING AND ORDERING INFORMATION

Device Marking	Device	Device Package	Reel Size	Tape Width	Quantity
SSF3620	SSF3620	SOP-8	Ø330mm	12mm	3000 units

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous@ Current-Pulsed (Note 1)	$I_D (25^\circ C)$	7	A
	$I_D (70^\circ C)$	5.8	A
	I_{DM}	25	A
Maximum Power Dissipation	P_D	2	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	$^\circ C$

THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Ambient (Note 2)	$R_{\theta JA}$	62.5	$^\circ C/W$
--	-----------------	------	--------------

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=30V, V_{GS}=0V$			1	μA

Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V,V _{DS} =0V			±100	nA
ON CHARACTERISTICS (Note 3)						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} ,I _D =250μA	1	1.5	2	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =4.5V, I _D =3.5A		21	30	mΩ
		V _{GS} =10V, I _D =7A		16	18.5	mΩ
Forward Transconductance	g _{FS}	V _{DS} =5V,I _D =11A		10		S
DYNAMIC CHARACTERISTICS (Note4)						
Input Capacitance	C _{iss}	V _{DS} =15V,V _{GS} =0V, F=1.0MHz		600		PF
Output Capacitance	C _{oss}			75		PF
Reverse Transfer Capacitance	C _{rss}			45		PF
SWITCHING CHARACTERISTICS (Note 4)						
Turn-on Delay Time	t _{d(on)}	V _{DS} =15V,V _{GS} =10V,R _{GEN} =6Ω I _D =1A		4		nS
Turn-on Rise Time	t _r			12		nS
Turn-Off Delay Time	t _{d(off)}			22		nS
Turn-Off Fall Time	t _f			4		nS
Total Gate Charge	Q _g	V _{DS} =15V,I _D =7A,V _{GS} =10V		12		nC
Gate-Source Charge	Q _{gs}			1.2		nC
Gate-Drain Charge	Q _{gd}			3.8		nC
Body Diode Reverse Recovery Time	T _{rr}	I _F =7A, dI/dt=100A/μs		13		nS
Body Diode Reverse Recovery Charge	Q _{rr}			7		nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
Diode Forward Voltage (Note 3)	V _{SD}	V _{GS} =0V,I _S =3A		0.7	1.2	V

NOTES:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on 1in² FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production testing.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

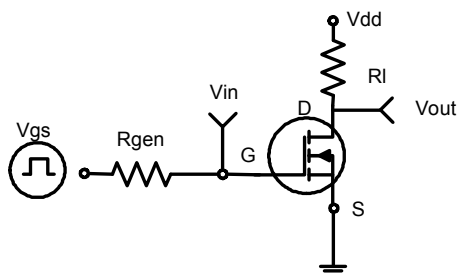


Figure 1: Switching Test Circuit

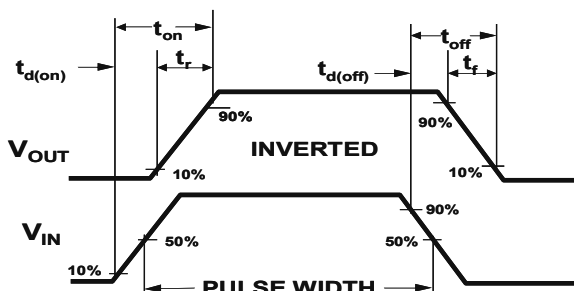


Figure 2: Switching Waveforms

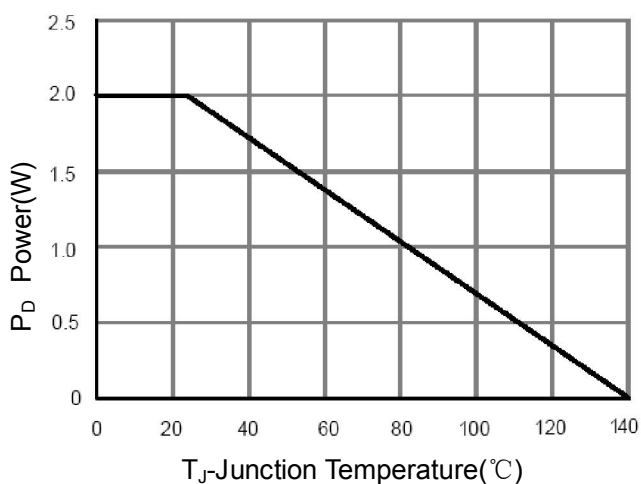


Figure 3 Power Dissipation

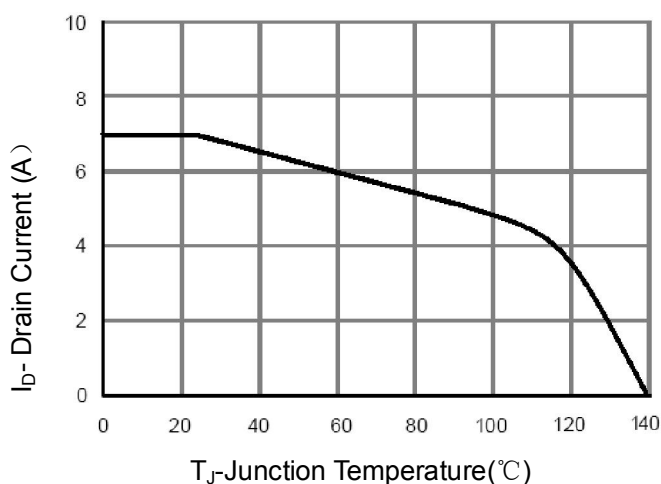


Figure 4 Drain Current

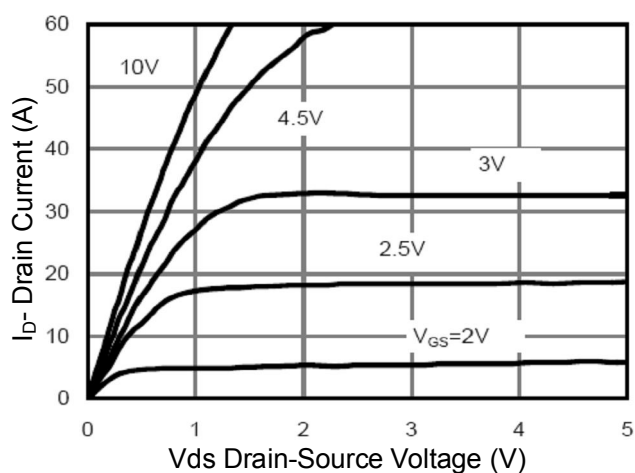


Figure 5 Output CHARACTERISTICS

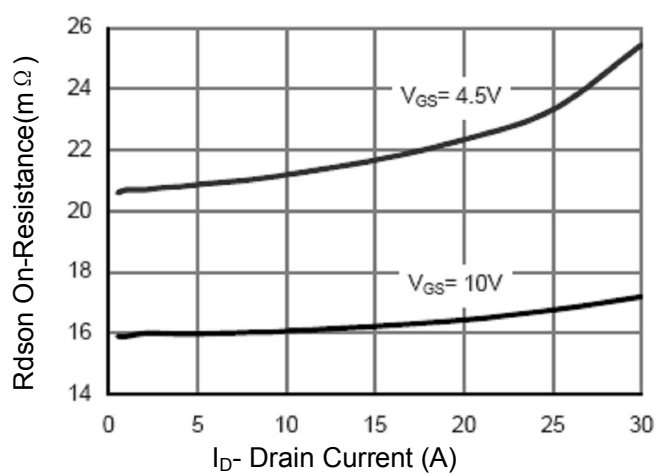


Figure 6 Drain-Source On-Resistance

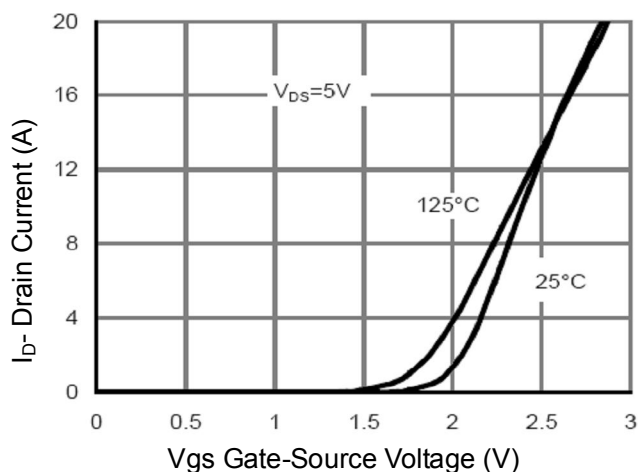


Figure 7 Transfer Characteristics

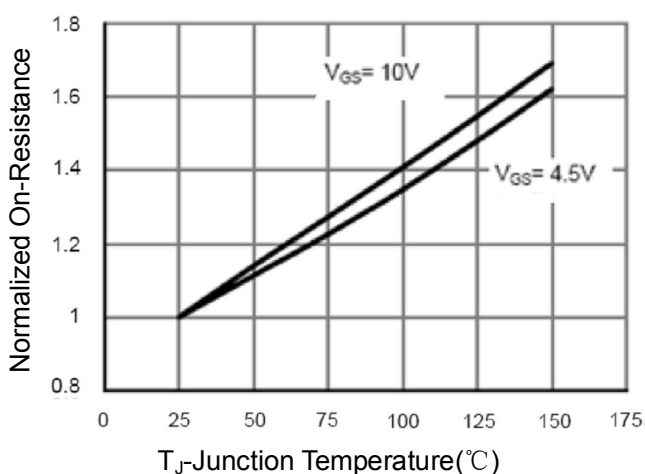


Figure 8 Drain-Source On-Resistance

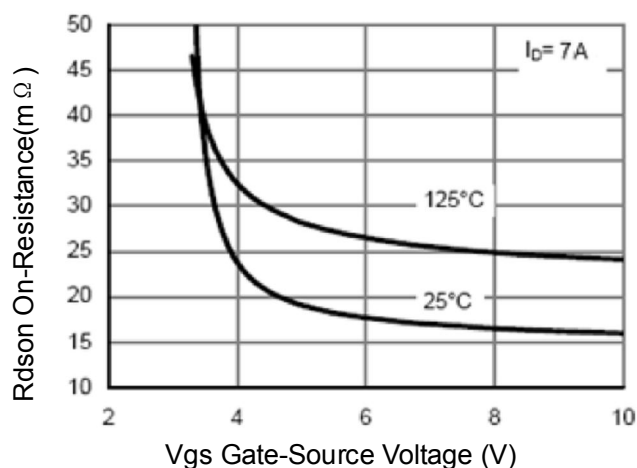


Figure 9 Rdson vs Vgs

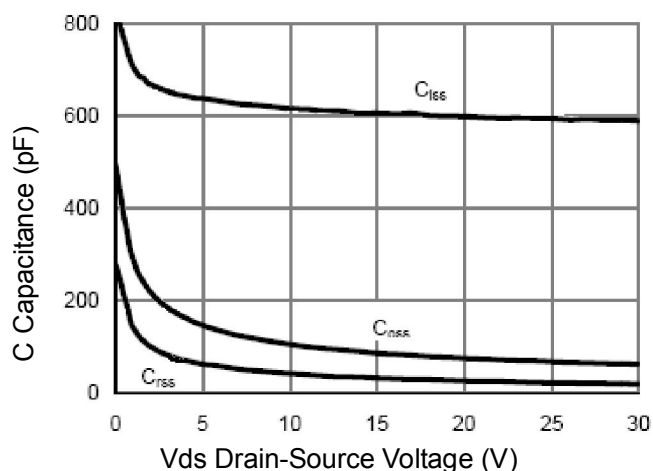


Figure 10 Capacitance vs Vds

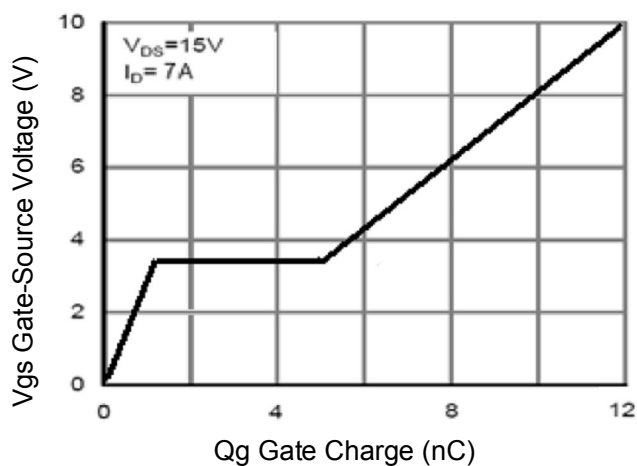


Figure 11 Gate Charge

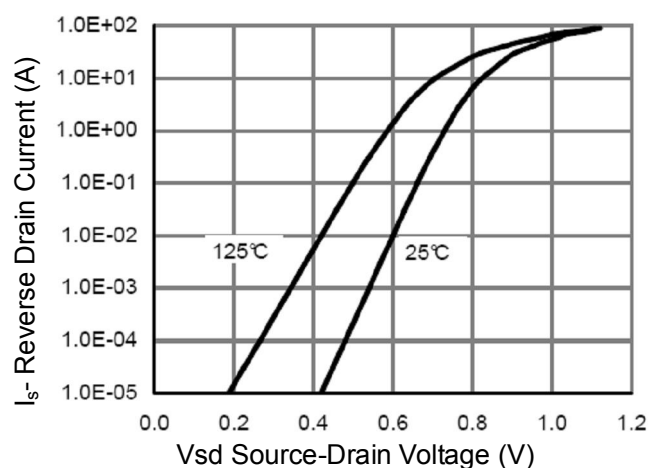


Figure 12 Source- Drain Diode Forward

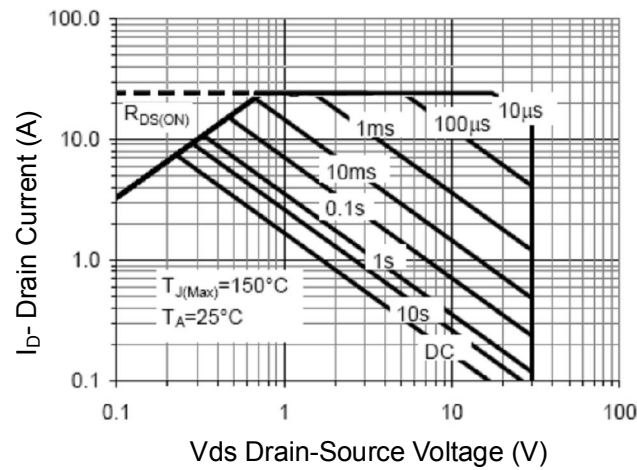


Figure 13 Safe Operation Area



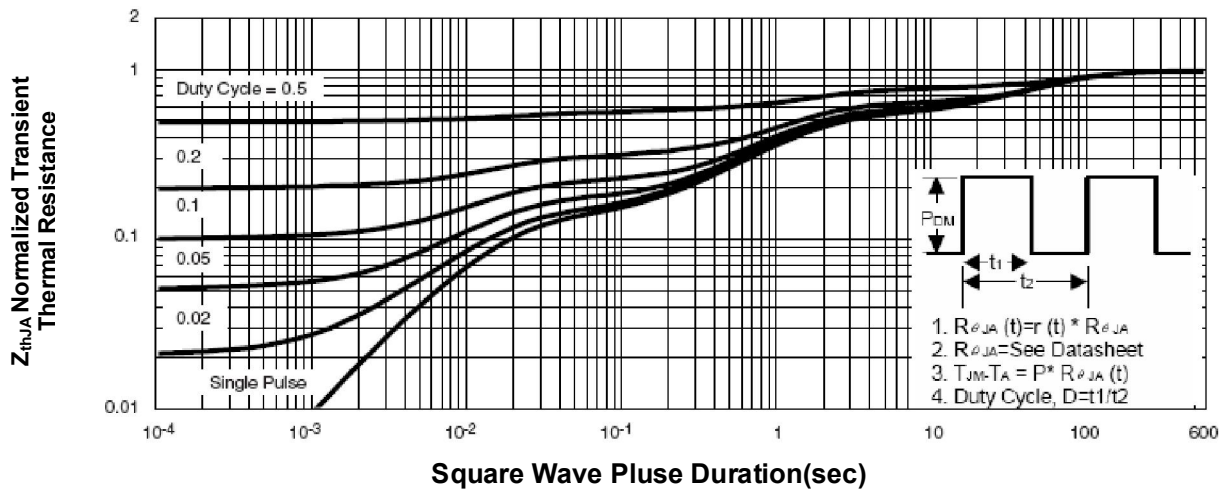


Figure 14 Normalized Maximum Transient Thermal Impedance

SOP-8 PACKAGE INFORMATION

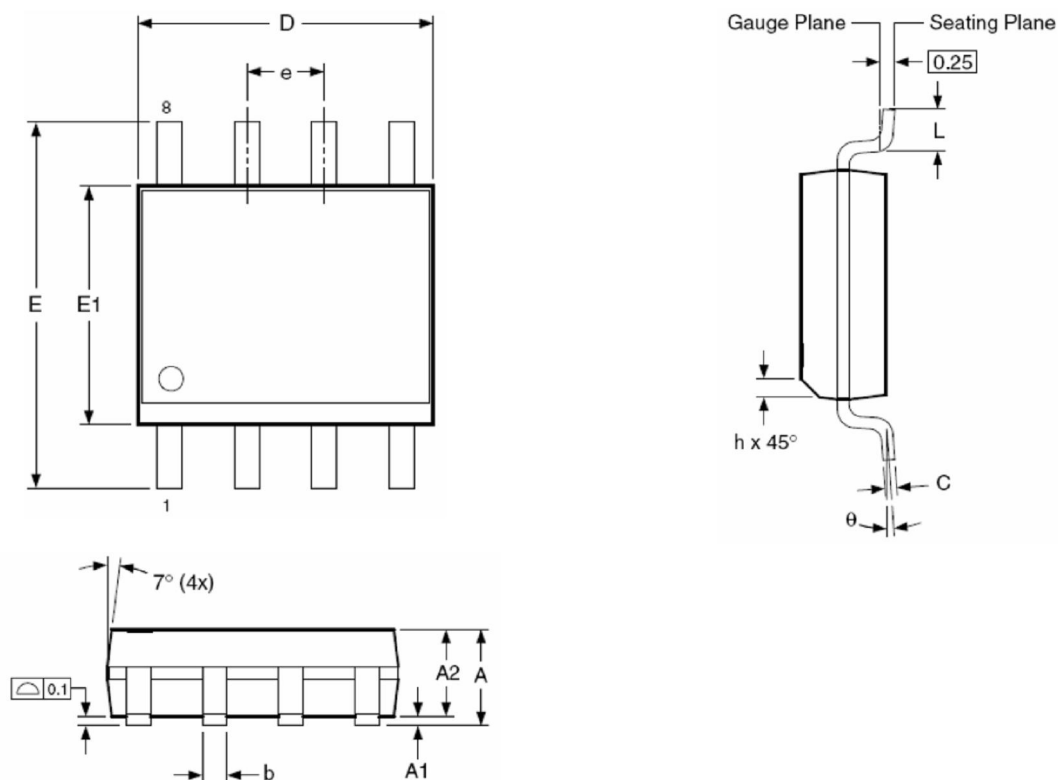

RECOMMENDED LAND PATTERN

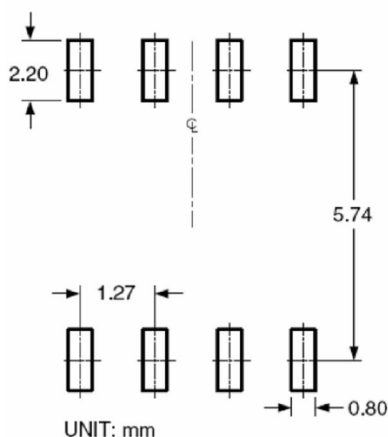

Dimensions in millimeters

Symbols	Min.	Nom.	Max.
A	1.35	1.65	1.75
A1	0.10	—	0.25
A2	1.25	1.50	1.65
b	0.31	—	0.51
c	0.17	—	0.25
D	4.80	4.90	5.00
E1	3.80	3.90	4.00
e	1.27 BSC		
E	5.80	6.00	6.20
h	0.25	—	0.50
L	0.40	—	1.27
θ	0°	—	8°

Dimensions in inches

Symbols	Min.	Nom.	Max.
A	0.053	0.065	0.069
A1	0.004	—	0.010
A2	0.049	0.059	0.065
b	0.012	—	0.020
c	0.007	—	0.010
D	0.189	0.193	0.197
E1	0.150	0.154	0.157
e	0.050 BSC		
E	0.228	0.236	0.244
h	0.010	—	0.020
L	0.016	—	0.050
θ	0°	—	8°

NOTES:

1. Dimensions are inclusive of plating
2. Package body sizes exclude mold flash and gate burrs. Mold flash at the non-lead sides should be less than 6 mils.
3. Dimension L is measured in gauge plane.
4. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.