



PD25 Single Digit 7 Segment 1.2" LED Display

Features

- *Single Digit 1.2" (30.5mm) Green Display with 10 Pins
- *Low Current Requirements
- *High Light Output
- *IC Compatible
- *High Reliability
- *Gray Face White Segments
- *RoHS Compliant


Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Power Dissipation (Segment / DP).....	156 / 78mW
Reverse Voltage (<100 μA).....	5.0V
Max Forward Current.....	30mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width).....	100mA
Operating Temperature Range	-25°C to $+85^\circ\text{C}$
Storage Temperature Range.....	-40°C to $+100^\circ\text{C}$
Soldering Temperature (1.6mm below body).....	260°C for 5 seconds

Electrical & Optical Characteristics at $T_A = 25^\circ\text{C}$

Part Number		Emitting Color	Chip Material	Dominant Wave Length	Peak Wave Length	Forward Voltage @20mA (V) Segment DP				Luminous Intensity @10mA (mcd)	
Common Anode	Common Cathode			nm	nm	Typ	Max	Typ	Max	Min	Typ
PD25-CADG13	PD25-CCDG13	Green	GaP	572	567	4.2	5.2	2.1	2.6	4.0	8.0

All Dimensions are in **Millimeters**. Tolerance is $\pm 0.25\text{mm}$ unless otherwise specified. The Slope Angle of any Pin maybe $\pm .5^\circ$ max.

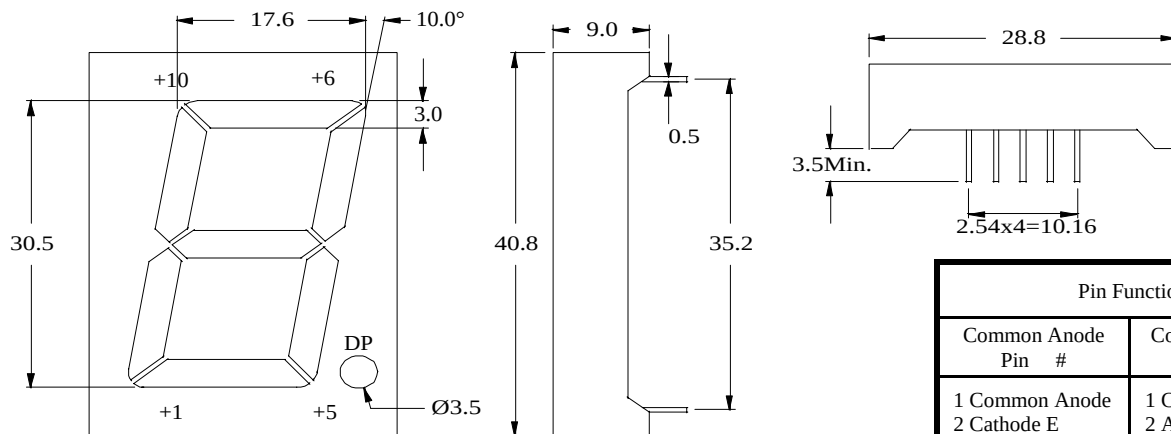

Pin Function	
Common Anode Pin #	Common Cathode Pin #
1 Common Anode	1 Common Cathode
2 Cathode E	2 Anode E
3 Cathode D	3 Anode D
4 Cathode C	4 Anode C
5 Cathode DP	5 Anode DP
6 Cathode B	6 Anode B
7 Cathode A	7 Anode A
8 Common Anode	8 Common Cathode
9 Cathode F	9 Anode F
10 Cathode G	10 Anode G