

Push Pull Transformer P/N T-1066


*40 WATTS

Turns Ratio	2CT : 1 ± 1%			
Parameter	Min.	Typ.	Max.	Units
Inductance pins (1-5)		274		μH
Leakage Inductance		0.84		μH
Interwinding Capacitance		26.0		pF
DC Resistance pins (1-5)		34		mΩ
DC Resistance pins (6-10)		8.7		mΩ
Hi-Pot Pins (1,3) to (6,4)	1100			V _{RMS}
¹ Current, pins (10-6)			2.25	A
Operating Frequency		100		kHz

¹Average Current


*Average Power Dissipation

Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C.



Physical Dimensions

inches (mm)

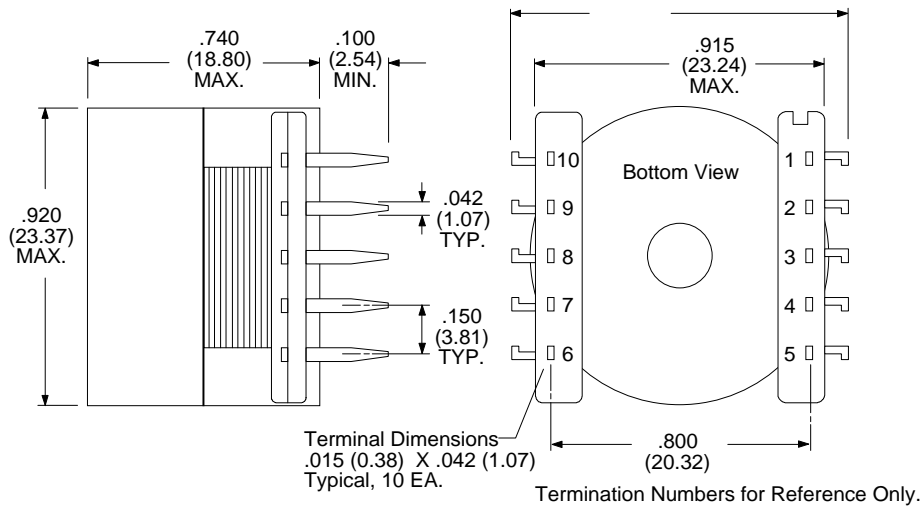

05/2/98