



SHEET 1 OF 1




CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

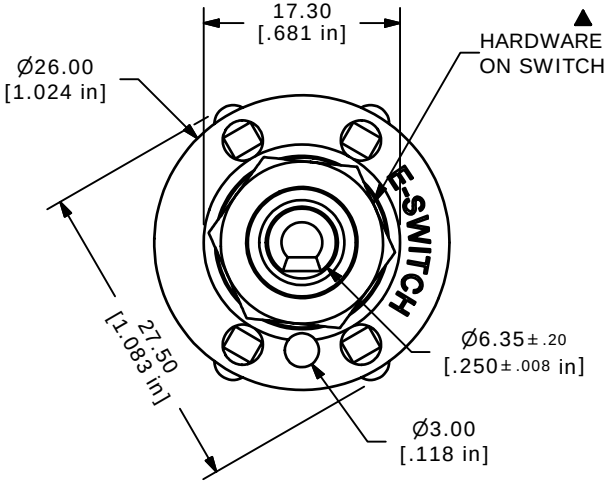

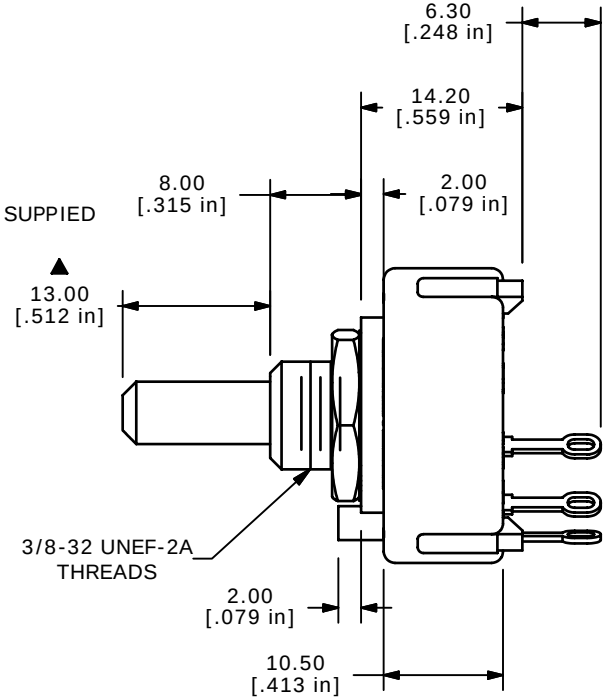

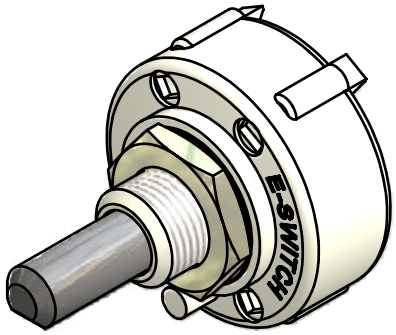

ISOMETRIC



NOTE:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
▲4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 0.3A @ 125VAC
6. CONTACT RATING: (NON-SWITCHING) 5A
7. OPERATING FORCE 800±300gm-cm
8. OPERATING TEMP: -30˚C TO 85˚C
▲9. CIRCUIT SP: DT POSITION 30˚ INDEX.
10. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
▲11. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	17211	RELEASED FOR PRODUCTION	4/24/07	TN

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH

TITLE KC12A13.001NLS

SCALE	DATE	DR	DWG	REV
1.5:1	4/24/2007	TN	G510608	A