
HAMMOND MANUFACTURING®

www.hammondmfg.com

183F10

Low Voltage P.C. Board Mounted Power Transformer

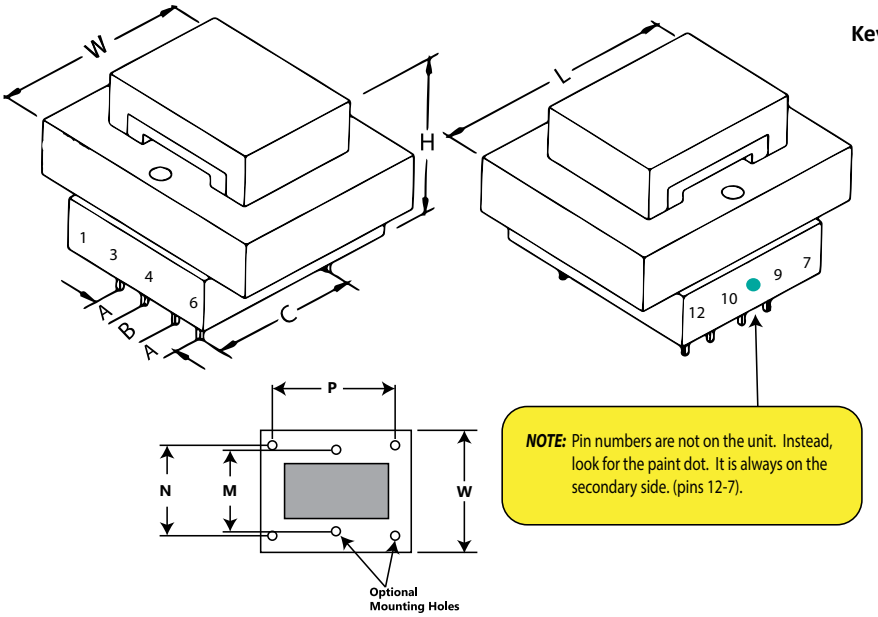

NOTE: Pin numbers are not on the unit. Instead, look for the paint dot. It is always on the secondary side. (pins 12-7).


Key Features:


- **Universal operation on 50/60Hz, 115 or 230V dual primary for worldwide use.**
- **Low Profile, split bobbin with top shroud design**
- **Dual winding secondary, non-concentrically wound.**
- **Low Primary to secondary coupling with no electro-static shield required.**
- **High Insulation - Hipot of 4,000V RMS**
- **Class F Insulation - 155 degrees C.**
- **P.C. Board mount with industry standard pin spacing.**
- **Agency listings: cURus, CE, and TUV.**

Mechanical - inches (mm)	
L	1.63 (41.4)
W	1.44 (36.6)
H	1.38 (35.1)
A	0.2 (5.1)
B	0.4 (10.2)
C	1 (25.4)
M	1.06 (26.9)
N	- (-)
P	- (-)
Pin Size	0.025 (0.6)
Screw Type	#4
Weight	0.37 lbs. / 0.17 kg
Electrical	
Size (VA)	5
Primary	115 / 230 VAC
Sec (Series)	10V C.T. @ 0.5A
Sec (Parallel)	5V @ 1A

Connection Information
183 Series Power Transformers

Primary Connections - 183 Series Transformers





Secondary Connections - 183 Series Transformers

