

SHEET OF

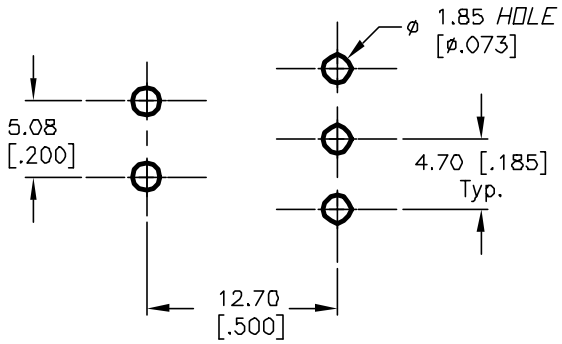



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

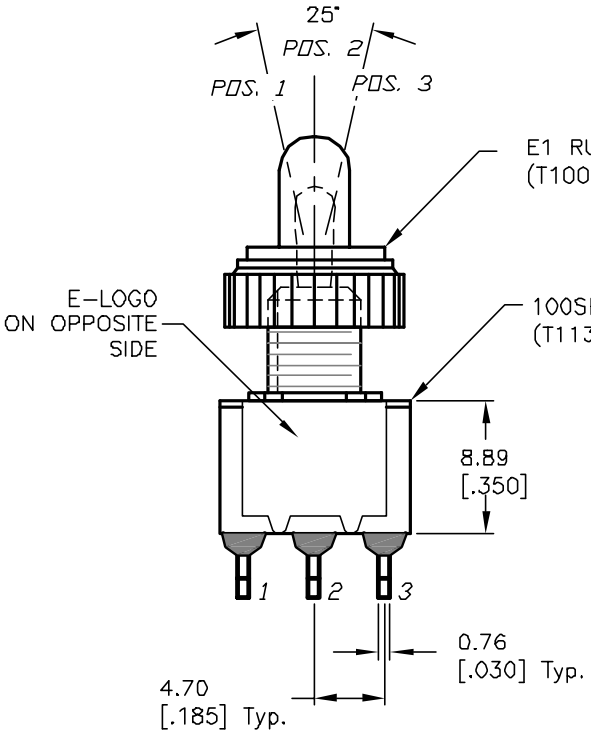

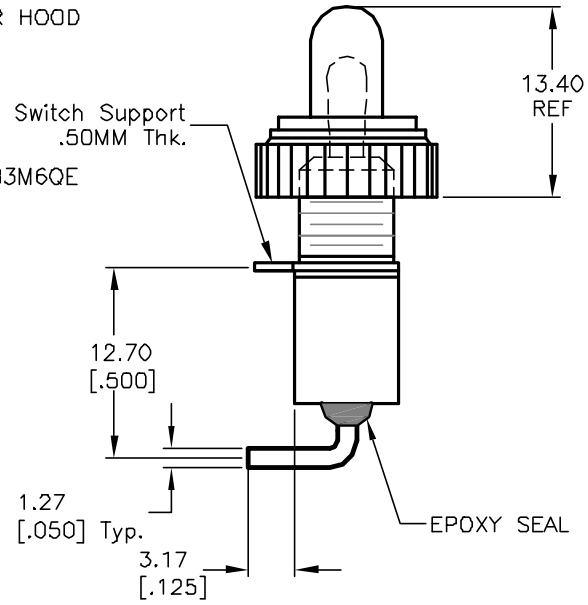

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
   2A @250VAC
5. FIXED TERM. & MOVING CONTACT:
   Copper Alloy W/SILVER plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
   at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12543	REVISED AND REDRAWN	11/7/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 100 SP-3 T2 B3 M6 Q E (w/Rubber Hood)

SCALE	DATE	DR	DWG	REV
2:1	11/7/02	CJB	XT0107P	A