

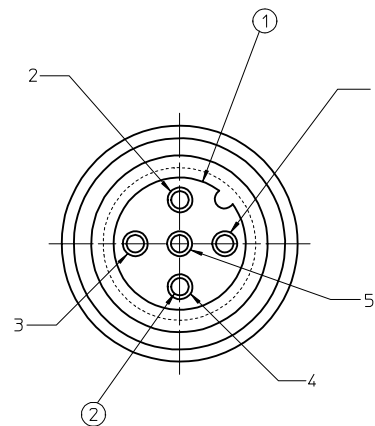


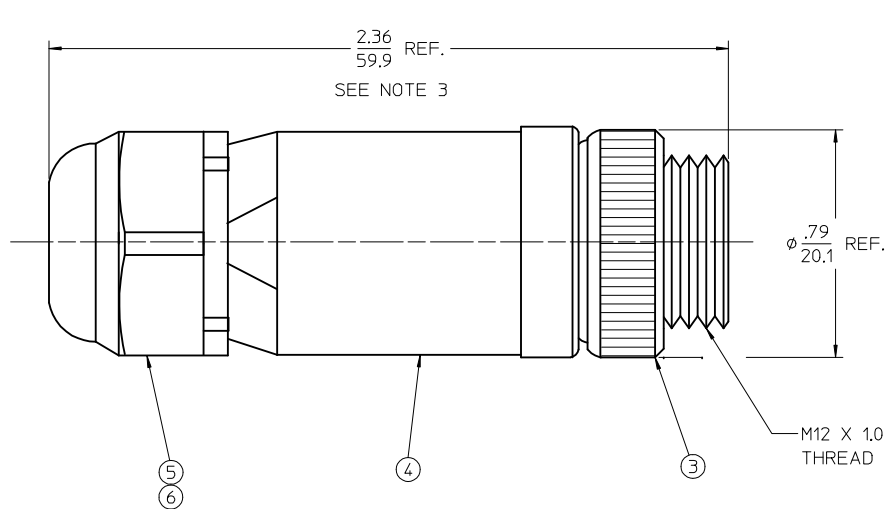

MALE FACE VIEW

NOTES:

1. CABLE RANGE: .16 to .32 DIA. (4.1mm TO 8.1mm)
2. MAX CONDUCTOR SIZE: 18 AWG
3. PART SHOWN ASSEMBLED FOR DIMENSIONAL REF. ONLY
4. COMPONENTS ARE SHIPPED AS UNASSEMBLED KIT
5. INSTRUCTION SHEET IS PACKED INSIDE BAG

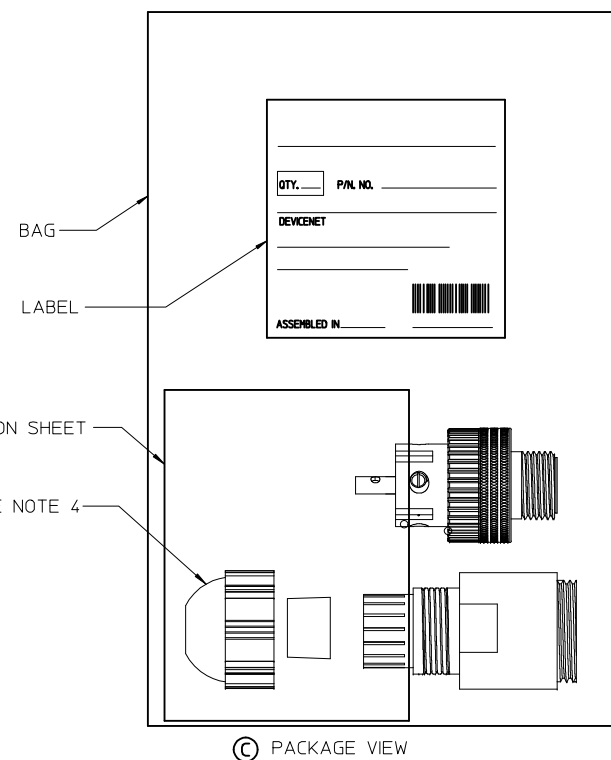

PACKAGE VIEW

7	1	INSTRUCTION SHEET		
6	1	PACKING GLAND (GROMMET)	NITRILE RUBBER	BLACK
5	1	PACKING NUT	NYLON	BLACK
4	1	OVERMOLD	POLYAMIDE	BLACK
3	1	COUPLING NUT	BRASS	NICKEL PLATED
2	5	CONTACT SOCKET	BRASS	SILVER PLATED
1	1	INSERT, 5/C, DC KEY, FEMALE	POLYAMIDE	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

REV'D PKG VIEW TO REMOVE THIS. EC NO: IPG2013-1559 DRAWN BY: DRWNRSTONE CHKD BY: JOZWIK APPR: JFURPHY	REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION		
						IN/MM						
				mm		INCH		DRAWN BY		DATE		TITLE MICRO-CHANGE 5/C FIELD ATTACHABLE MALE
				4 PLACES ± --- ± ---		R.STONE		2007/10/11				
				3 PLACES ± --- ± ---		CHECKED BY		DATE				
				2 PLACES ± 0.13 ± .01		J.MACNEIL		2007/10/16				
				1 PLACE ± 0.3 ± ---		APPROVED BY		DATE				
				ANGULAR ±1/2°		J.MACNEIL		2007/10/16		 MOLEX INCORPORATED		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.			SHEET NO. 1 OF 1	
						848549318		SD-84854-020				
SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										