


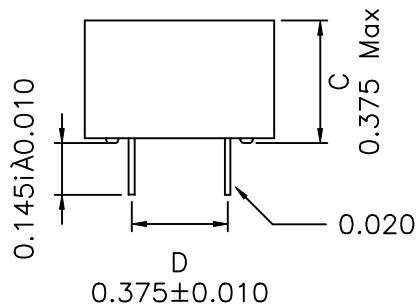


1. Mechanical Dimensions:



2. Schematic:



3. Electrical Specifications: @25°C

OCL: 375uH±15% @10KHz 0.1V 0Adc

OCL: 300uH Typical @10KHz 0.1V 0.360Adc

DC Resistance: 1.300 Ohms Typ

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV A/2

XFMRS Inc	Title: POTTED INDUCTOR		
	UNLESS OTHERWISE SPECIFIED		P/N: XF3756-HPA
TOLERANCES:		REV A	
.xxx ±0.010		DWN.	廖玉坤 Jul-17-01
Dimensions in INCH		CHK.	李清儿 Jul-17-01
SHEET 1 OF 1	APP.	Joe Huff	Jul-17-01