

CMOS NOR Gates
High-Voltage Types



SOP-14



TSSOP-14

■ DESCRIPTION

UCD4002B NOR gate provides the system designer with direct implementation of the NOR function and supplements the existing family of CMOS gates.All inputs and outputs are buffered.

■ FEATURES

* Propagation delay time=60ns at C_L=50pF,V_{DD}=10V
* Buffered inputs and outputs
* Maximum input current of 1μA at 18V
* standardized symmetrical output characteristics
* 100% tested for maximum quiescent current at 20V


■ ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
UCD4002BL-S14-T	UCD4002BG-S14-T	SOP-14	Tube
UCD4002BL-S14-R	UCD4002BG-S14-R	SOP-14	Tape Reel
UCD4002BL-P14-T	UCD4002BG-P14-T	TSSOP-14	Tube
UCD4002BL-P14-R	UCD4002BG-P14-R	TSSOP-14	Tape Reel

UCD4002BL-S14-T (1)Packing Type (2)Package Type (3)Halogen Free	(1) T: Tube, R: Tape Reel (2) S14: SOP-14, P14: TSSOP-14 (3) L: Lead Free, G: Halogen Free

Copyright © 2013 Unisonic Technologies Co., Ltd

PIN CONFIGURATION

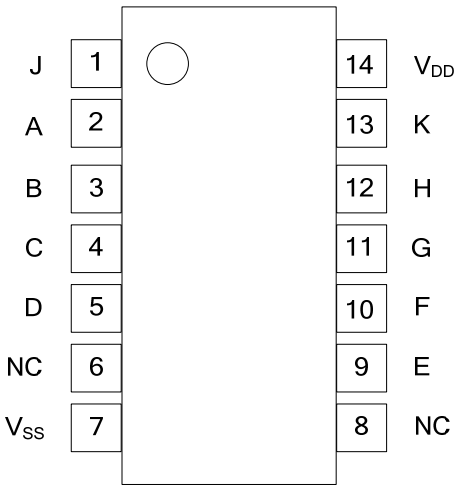


■ FUNCTION TABLE

INPUT	INPUT	INPUT	INPUT	INPUT	INPUT	INPUT	INPUT	OUTPUT	OUTPUT
A	B	C	D	E	F	G	H	K	J
L	L	L	L	L	L	L	L	H	H
H	X	X	X	H	X	X	X	L	L
X	H	X	X	X	H	X	X	L	L
X	X	H	X	X	X	H	X	L	L
X	X	X	H	X	X	X	H	L	L

NOTE: X = DON'T CARE CASE

■ LOGIC DIAGRAM

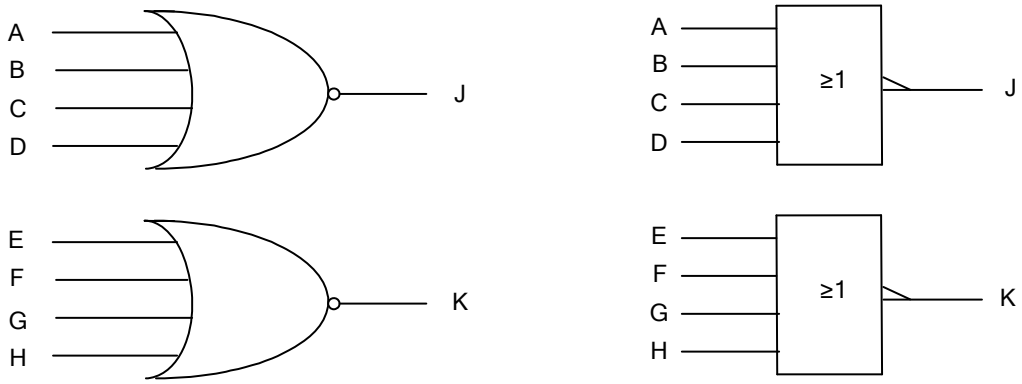

■ ABSOLUTE MAXIMUM RATING (T_A =25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{DD}	-0.5 ~ 20	V
Input Voltage	V_{IN}	-0.5 ~ VCC +0.5	V
Output Voltage	V_{OUT}	-0.5 ~ VCC +0.5	V
Power Dissipation(T_A =55°C)	P_D	500	mW
Storage Temperature	T_{STG}	-65 ~ + 150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING COMDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{DD}		3		18	V
Operating Temperature	T_{OPR}		-40		125	°C

■ ELECTRICAL CHARACTERISTICS (T_A =25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	V_{IH}	V_{DD}= 5V, V_O=0.5V	3.5			V
		V_{DD} = 10V, V_O=1.0V	7.0			
		V_{DD}= 15V, V_O=1.5V	11.0			
Low-Level Input Voltage	V_{IL}	V_{DD}= 5V, V_O=4.5V			1.5	V
		V_{DD}= 10V, V_O=9.0V			3.0	
		V_{DD}= 15V, V_O=13.5V			4.0	
High-Level Output Voltage	V_{OH}	V_{DD}= 5V, No Load	4.95	5		V
		V_{DD}= 10V, No Load	9.95	10		
		V_{DD}= 15V, No Load	14.95	15		
Low-Level Output Voltage	V_{OL}	V_{DD}= 5V, No Load		0	0.05	V
		V_{DD}= 10V, No Load		0	0.05	
		V_{DD}= 15V, No Load		0	0.05	
High-Level Output Current (Note)	I_{OH}	V_{DD}= 5V, V_O=4.6V	-0.51	-1.0		mA
		V_{DD}= 5V, V_O=2.5V	-1.6	-3.2		
		V_{DD}= 10V, V_O=9.5V	-1.3	-2.6		
		V_{DD}= 15V, V_O=13.5V	-3.4	-6.8		
Low-Level Output Current (Note)	I_{OL}	V_{DD}= 5V, V_O=0.4V	0.51	1		
		V_{DD}= 10V, V_O=0.5V	1.3	2.6		
		V_{DD}= 15V, V_O=1.5V	3.4	6.8		
Input Leakage Current	$I_{I(LEAK)}$	V_{DD}= 15V ,V_{IN} = V_{DD} or GND			±0.1	μA
Quiescent Supply Current	I_{DD}	V_{DD}= 5V, V_{IN} = V_{DD} or V_{SS}, I_{OUT} = 0		0.01	0.25	μA
		V_{DD}= 10V, V_{IN} = V_{DD} or V_{SS}, I_{OUT} = 0		0.01	0.5	
		V_{DD}= 15V, V_{IN} = V_{DD} or V_{SS}, I_{OUT} = 0		0.01	1.0	
		V_{DD}= 20V, V_{IN} = V_{DD} or V_{SS}, I_{OUT} = 0		0.02	5.0	

Note: I_{OL} and I_{OH} are tested one output at a time

■ SWITCHING CHARACTERISTICS


(T_A =25°C, Input t_r, t_f =20ns, C_L =50pf, R_L = 200kΩ, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from Input(A or B) to Output(Y)	t_{PLH}	V_{DD}=5V		125	250	ns
		V_{DD}=10V		60	120	
		V_{DD}=15V		45	90	
	t_{PHL}	V_{DD}=5V		125	250	
		V_{DD}=10V		60	120	
		V_{DD}=15V		45	90	
Transition Time	t_{TLH}/t_{THL}	V_{DD}=5V		100	200	ns
		V_{DD}=10V		50	100	
		V_{DD}=15V		40	80	


■ OPERATING CHARACTERISTICS(T_A=25°C,unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Average Input Capacitance	C_{IN}	Any Input		5	7.5	pF

■ TEST CIRCUIT AND WAVEFORMS

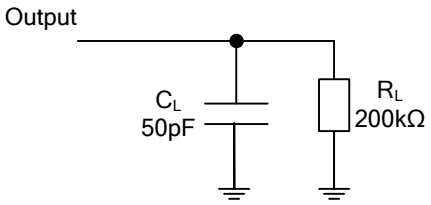

Definitions for test circuit

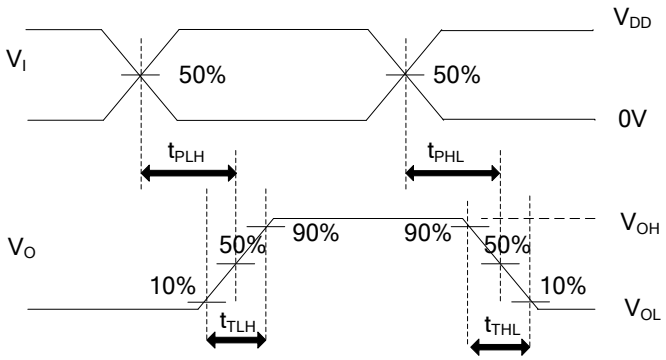

Propagation Delay Times

Note: C_L includes probe and jig capacitance.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.