




Surface Mount TRANSZORB® Transient Voltage Suppressors




DO-213AB (GL41)

Breakdown Voltage 6.8 to 200V
Peak Pulse Power 400W

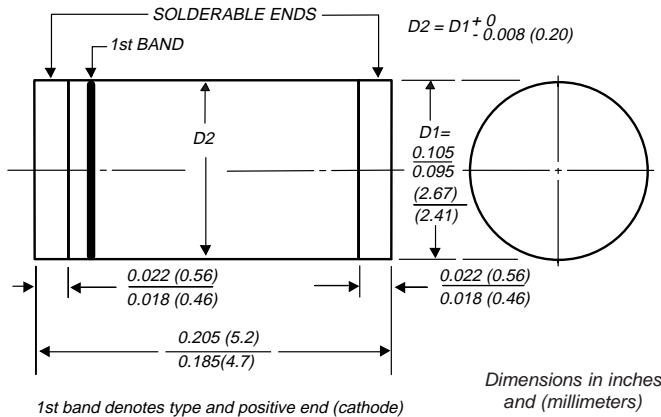

Mounting Pad Layout

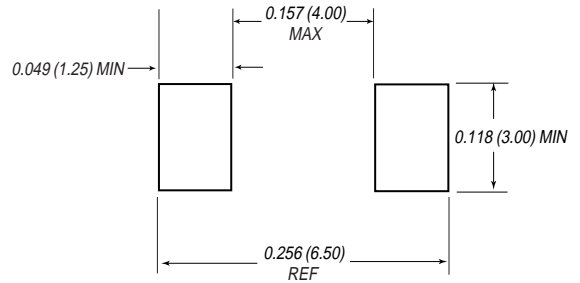

Mechanical Data

Case: JEDEC DO-213AB molded plastic body over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed:
250°C/10 seconds at terminals

Polarity: Blue bands denotes the cathode which is positive with respect to the anode under normal TVS operation

Mounting Position: Any

Weight: 0.0046 oz., 0.166 g

Packaging codes/options:

26/5K per 13" Reel (12mm tape), 60K/box
46/1.5K per 7" Reel (12mm tape), 30K/box

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Glass passivated junction
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time
- 400W peak pulse capability with a 10/1000µs waveform, repetition rate (duty cycle): 0.01% (200W above 91V)
- For devices with $V_{(BR)} \geq 10V$, I_D are typically less than 1.0µA
- High temperature soldering guaranteed: 250°C/10 seconds at terminals
- Available in unidirectional only

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Peak pulse power dissipation with a 10/1000µs waveform ⁽¹⁾ (Fig. 1)	PPPM	Minimum 400	W
Steady state power dissipation at $T_L = 75^\circ C$ ⁽²⁾	PM(AV)	1.0	W
Peak pulse current with a 10/1000µs waveform ⁽¹⁾ (Fig. 3)	I _{PPM}	See Next Table	A
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽³⁾	I _{FSM}	40	A
Maximum instantaneous forward voltage at 25A for unidirectional only	V _F	3.5	V
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Notes: (1) Non-repetitive current pulse, per Fig.3 and derated above $T_A = 25^\circ C$ per Fig. 2. Rating is 200W above 91V.

(2) Mounted on copper pads to each terminal of 0.31 in² (8.0 mm²) per Fig. 5

(3) Measured at 8.3ms single half sine-wave or equivalent square wave duty cycle = 4 pulses per minute maximum

TGL41-6.8 thru TGL41-200A



Vishay Semiconductors
formerly General Semiconductor

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Device Type	Breakdown Voltage V _{BR} (V) ⁽¹⁾		Test Current at I _T (mA)	Stand-off Voltage V _{WM} (V)	Maximum Reverse Leakage at V _{WM} I _D (μA)	Maximum Peak Pulse Current I _{PPM} (A) ⁽²⁾	Maximum Clamping Voltage at I _{PPM} V _C (V)	Maximum Temperature Coefficient of V _{BR} (% / °C)
	Min	Max						
TGL41-6.8	6.12	7.48	10	5.50	1000	37.0	10.8	0.060
TGL41-6.8A	6.45	7.14	10	5.80	1000	38.1	10.5	0.060
TGL41-7.5	6.75	8.25	10	6.05	500	34.2	11.7	0.064
TGL41-7.5A	7.13	7.88	10	6.40	500	35.4	11.3	0.064
TGL41-8.2	7.38	9.02	10	6.63	200	32.0	12.5	0.068
TGL41-8.2A	7.79	8.61	10	7.02	200	33.1	12.1	0.068
TGL41-9.1	8.19	10.0	1.0	7.37	50.0	29.0	13.8	0.071
TGL41-9.1A	8.65	9.55	1.0	7.78	50.0	29.9	13.4	0.071
TGL41 -10	9.00	11.0	1.0	8.10	10.0	26.7	15.0	0.076
TGL41 -10A	9.50	10.5	1.0	8.55	10.0	27.6	14.5	0.076
TGL41 -11	9.90	12.1	1.0	8.92	5.0	24.7	16.2	0.078
TGL41 -11A	10.5	11.6	1.0	9.40	5.0	25.6	15.6	0.078
TGL41-12	10.8	13.2	1.0	9.72	5.0	23.1	17.3	0.081
TGL41-12A	11.4	12.6	1.0	10.2	5.0	24.0	16.7	0.081
TGL41-13	11.7	14.3	1.0	10.5	5.0	21.1	19.0	0.084
TGL41-13A	12.4	13.7	1.0	11.1	5.0	22.0	18.2	0.084
TGL41-15	13.5	16.5	1.0	12.1	5.0	18.2	22.0	0.087
TGL41-15A	14.3	15.8	1.0	12.8	5.0	18.9	21.2	0.087
TGL41-16	14.4	17.6	1.0	12.9	5.0	17.0	23.5	0.089
TGL41-16A	15.2	16.8	1.0	13.6	5.0	17.8	22.5	0.089
TGL41-18	16.2	19.8	1.0	14.5	5.0	15.1	26.5	0.091
TGL41-18A	17.1	18.9	1.0	15.3	5.0	15.9	25.2	0.091
TGL41-20	18.0	22.0	1.0	16.2	5.0	13.7	29.1	0.093
TGL41-20A	19.0	21.0	1.0	17.1	5.0	14.4	27.7	0.093
TGL41-22	19.8	24.2	1.0	17.8	5.0	12.5	31.9	0.095
TGL41-22A	20.9	23.1	1.0	18.8	5.0	13.1	30.6	0.095
TGL41-24	21.6	26.4	1.0	19.4	5.0	11.5	34.7	0.097
TGL41-24A	22.8	25.2	1.0	20.5	5.0	12.0	33.2	0.097
TGL41-27	24.3	29.7	1.0	21.8	5.0	10.2	39.1	0.099
TGL41-27A	25.7	28.4	1.0	23.1	5.0	10.7	37.5	0.099
TGL41-30	27.0	33.0	1.0	24.3	5.0	9.2	43.5	0.100
TGL41-30A	28.5	31.5	1.0	25.6	5.0	9.7	41.4	0.100
TGL41-33	29.7	36.3	1.0	26.8	5.0	8.4	47.7	0.101
TGL41-33A	31.4	34.7	1.0	28.2	5.0	8.8	45.7	0.101
TGL41-36	32.4	39.6	1.0	29.1	5.0	7.7	52.0	0.102
TGL41-36A	34.2	37.8	1.0	30.8	5.0	8.0	49.9	0.102
TGL41-39	35.1	42.9	1.0	31.6	5.0	7.1	56.4	0.103
TGL41-39A	37.1	41.0	1.0	33.3	5.0	7.4	53.9	0.103
TGL41-43	38.7	47.3	1.0	34.8	5.0	6.5	61.9	0.104
TGL41-43A	40.9	45.2	1.0	36.8	5.0	6.7	59.3	0.104



Electrical Characteristics (T_A = 25°C unless otherwise noted)

Device Type	Breakdown Voltage V _{BR} (V) ⁽¹⁾		Test Current at I _T (mA)	Stand-off Voltage V _{WM} (V)	Maximum Reverse Leakage at V _{WM} I _D (μA)	Maximum Peak Pulse Current I _{PPM} (A) ⁽²⁾	Maximum Clamping Voltage at I _{PPM} V _C (V)	Maximum Temperature Coefficient of V _{BR} (% / °C)
	Min	Max						
TGL41-47	42.3	51.7	1.0	38.1	5.0	5.9	67.8	0.104
TGL41-47A	44.7	49.4	1.0	40.2	5.0	6.2	64.8	0.104
TGL41-51	45.9	56.1	1.0	41.3	5.0	5.4	73.5	0.105
TGL41-51A	48.5	53.6	1.0	43.6	5.0	5.7	70.1	0.105
TGL41-56	50.4	61.6	1.0	45.4	5.0	5.0	80.5	0.106
TGL41-56A	53.2	58.8	1.0	47.8	5.0	5.2	77.0	0.106
TGL41-62	55.8	68.2	1.0	50.2	5.0	4.5	89.0	0.107
TGL41-62A	58.9	65.1	1.0	53.0	5.0	4.7	85.0	0.107
TGL41-68	61.2	74.8	1.0	55.1	5.0	4.1	98.0	0.107
TGL41-68A	64.6	71.4	1.0	58.1	5.0	4.3	92.0	0.107
TGL41-75	67.5	82.5	1.0	60.7	5.0	3.7	108	0.108
TGL41-75A	71.3	78.8	1.0	64.1	5.0	3.9	103	0.108
TGL41-82	73.8	90.2	1.0	66.4	5.0	3.4	118	0.108
TGL41-82A	77.9	86.1	1.0	70.1	5.0	3.5	113	0.108
TGL41-91	81.9	100.0	1.0	73.7	5.0	3.1	131	0.109
TGL41-91A	86.5	95.50	1.0	77.8	5.0	3.2	125	0.109
TGL41-100	90.0	110.0	1.0	81.0	5.0	1.39	144	0.109
TGL41-100A	95.0	105.0	1.0	85.5	5.0	1.46	137	0.109
TGL41-110	99.0	121.0	1.0	89.2	5.0	1.27	158	0.110
TGL41-110A	105.0	116.0	1.0	94.0	5.0	1.32	152	0.110
TGL41-120	108.0	132.0	1.0	97.2	5.0	1.16	173	0.110
TGL41-120A	114.0	126.0	1.0	102.0	5.0	1.21	165	0.110
TGL41-130	117.0	143.0	1.0	105.0	5.0	1.07	187	0.110
TGL41-130A	124.0	137.0	1.0	111.0	5.0	1.12	179	0.110
TGL41-150	135.0	165.0	1.0	121.0	5.0	0.93	215	0.111
TGL41-150A	143.0	158.0	1.0	128.0	5.0	0.97	207	0.111
TGL41-160	144.0	176.0	1.0	130.0	5.0	0.87	230	0.111
TGL41-160A	152.0	168.0	1.0	136.0	5.0	0.91	219	0.111
TGL41-170	153.0	187.0	1.0	138.0	5.0	0.82	244	0.111
TGL41-170A	162.0	179.0	1.0	145.0	5.0	0.85	234	0.111
TGL41-180	162.0	198.0	1.0	146.0	5.0	0.78	258	0.111
TGL41-180A	171.0	189.0	1.0	154.0	5.0	0.81	246	0.111
TGL41-200	180.0	220.0	1.0	162.0	5.0	0.70	287	0.111
TGL41-200A	190.0	210.0	1.0	171.0	5.0	0.73	274	0.111







- Notes:** (1) V_{BR} measured after I_T applied for 300μs square wave pulse or equivalent
(2) Surge current waveform per Figure 3 and derate per Fig.2
(3) All terms and symbols are consistent with ANSI/IEEE C62.35

TGL41-6.8 thru TGL41-200A



Vishay Semiconductors
formerly General Semiconductor

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

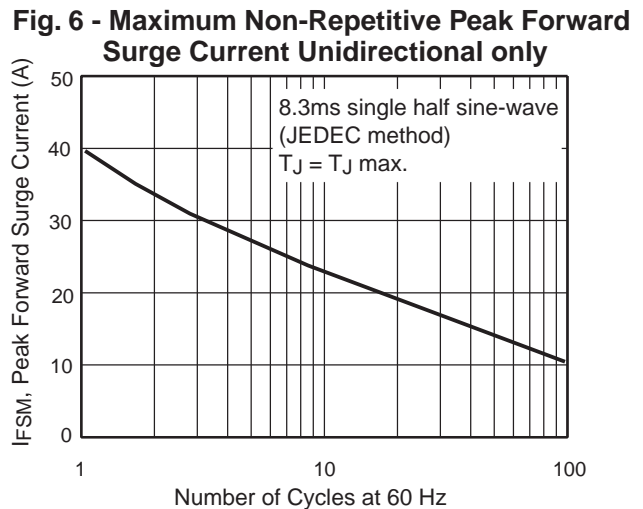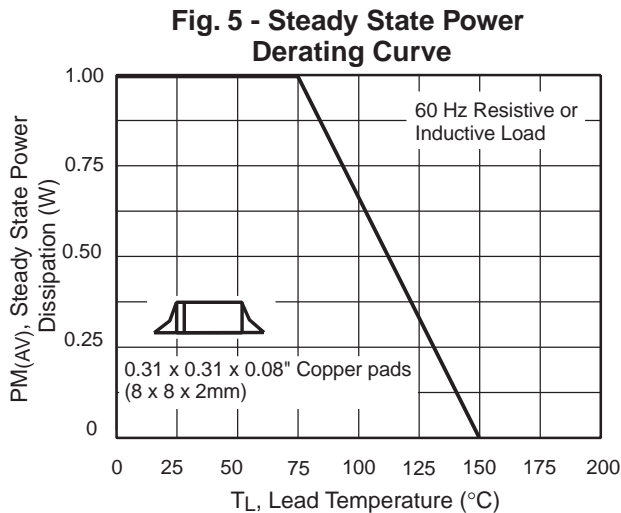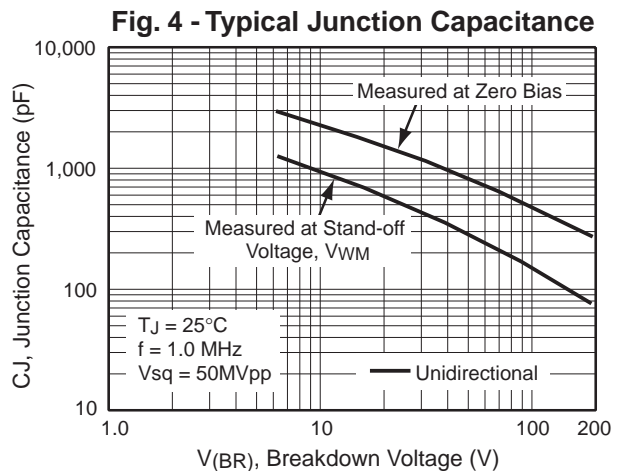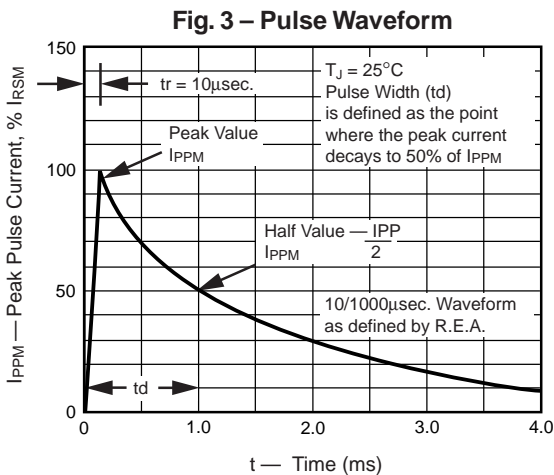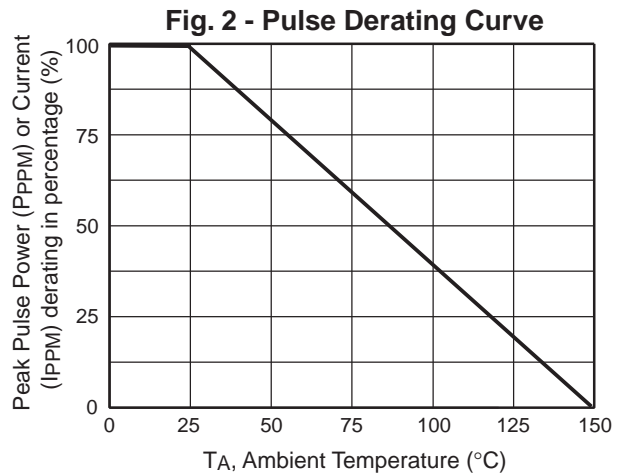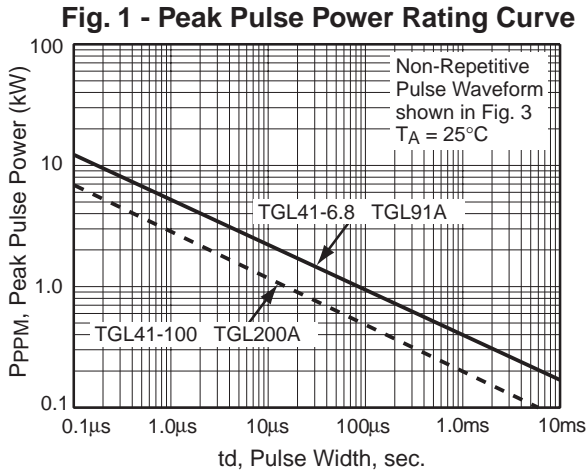



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.