ALPHA & OMEGA SEMICONDUCTOR

AOB12T60P/AOTF12T60P

600V,12A N-Channel MOSFET

General Description

- Trench Power AlphaMOS-II technology
- Low $R_{DS(ON)}$
- Low Ciss and Crss
- High Current Capability
- RoHS and Halogen Free Compliant

Applications

- General Lighting for LED and CCFL
- AC/DC Power supplies for Industrial, Consumer, and Telecom

Product Summary


V_{DS} @ $T_{j,max}$	700V
I_{DM}	48A
$R_{DS(ON),max}$	< 0.52Ω
$Q_{g,typ}$	33nC
E_{oss} @ 400V	4.4µJ

100% UIS Tested
100% R_g Tested

RoHS Compliant


Top View

TO-220F




AOTF12T60P

TO-263
D²PAK



AOB12T60P



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOB12T60PL	TO-263 Green	Tape & Reel	800
AOTF12T60P	TO-220F Pb Free	Tube	1000
AOTF12T60PL	TO-220F Green	Tube	1000

Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	AOB12T60P	AOTF12T60P	AOTF12T60PL	Units
Drain-Source Voltage		V_{DS}	600			V
Gate-Source Voltage		V_{GS}	±30			V
Continuous Drain Current	T_C=25°C	I_D	12	12*	12*	A
	T_C=100°C		9	9*	9*	
Pulsed Drain Current [C]		I_{DM}	48			
Avalanche Current [C] L=1mH		I_{AR}	12			A
Repetitive avalanche energy [C]		E_{AR}	72			mJ
Single pulsed avalanche energy [G]		E_{AS}	750			mJ
MOSFET dv/dt ruggedness		dv/dt	50			V/ns
Peak diode recovery dv/dt [J]			15			
Power Dissipation [B]	T_C=25°C	P_D	250	50	35	W
	Derate above 25°C		2	0.4	0.3	W/°C
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150			°C
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds		T_L	300			°C

Thermal Characteristics

Parameter	Symbol	AOB12T60P	AOTF12T60P	AOTF12T60PL	Units
Maximum Junction-to-Ambient [A,D]	$R_{\theta JA}$	65	65	65	°C/W
Maximum Case-to-sink [A]	$R_{\theta CS}$	0.5	--	--	°C/W
Maximum Junction-to-Case	$R_{\theta JC}$	0.5	2.5	3.6	°C/W

* Drain current limited by maximum junction temperature.

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V, T_J=25°C	600			V
		I_D=250µA, V_{GS}=0V, T_J=150°C		700		
BV_{DSS} /ΔTJ	Breakdown Voltage Temperature Coefficient	I_D=250µA, V_{GS}=0V		0.58		V/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=600V, V_{GS}=0V			1	µA
		V_{DS}=480V, T_J=125°C			10	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±30V			±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=5V, I_D=250µA	3	4.1	5	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=6A		0.44	0.52	Ω
g_{FS}	Forward Transconductance	V_{DS}=40V, I_D=6A		11		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.73	1	V
I_S	Maximum Body-Diode Continuous Current				12	A
I_{SM}	Maximum Body-Diode Pulsed Current [C]				48	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=100V, f=1MHz		2028		pF
C_{oss}	Output Capacitance			71		pF
$C_{o(er)}$	Effective output capacitance, energy related [H]	V_{GS}=0V, V_{DS}=0 to 480V, f=1MHz		52		pF
$C_{o(tr)}$	Effective output capacitance, time related [I]			94		pF
C_{rss}	Reverse Transfer Capacitance	V_{GS}=0V, V_{DS}=100V, f=1MHz		13		pF
R_g	Gate resistance	f=1MHz		2.2		Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	V_{GS}=10V, V_{DS}=480V, I_D=12A		33	50	nC
Q_{gs}	Gate Source Charge			13		nC
Q_{gd}	Gate Drain Charge			10		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=300V, I_D=12A, R_G=25Ω		52		ns
t_r	Turn-On Rise Time			72		ns
$t_{D(off)}$	Turn-Off DelayTime			66		ns
t_f	Turn-Off Fall Time			42		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=12A,dI/dt=100A/µs,V_{DS}=100V		483		ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=12A,dI/dt=100A/µs,V_{DS}=100V		7		µC

A. The value of $R_{\theta JA}$ is measured with the device in a still air environment with T_A =25° C.
B. The power dissipation P_D is based on $T_{J(MAX)}$=150° C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150° C, Ratings are based on low frequency and duty cycles to keep initial T_J =25° C.
D. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to case $R_{\theta JC}$ and case to ambient.
E. The static characteristics in Figures 1 to 6 are obtained using <300 ms pulses, duty cycle 0.5% max.
F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}$=150° C. The SOA curve provides a single pulse rating.
G. L=60mH, I_{AS}=5A, V_{DD}=150V, R_G=25Ω, Starting T_J=25° C.
H. $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 80% $V_{(BR)DSS}$.
I. $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80% $V_{(BR)DSS}$.
J. I_{SD}≤I_D, di/dt≤200A/µs, V_{DD}=400V, T_J≤$T_{J(MAX)}$.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

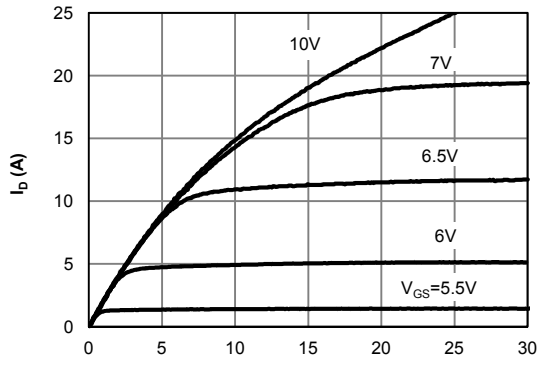


Figure 1: On-Region Characteristics

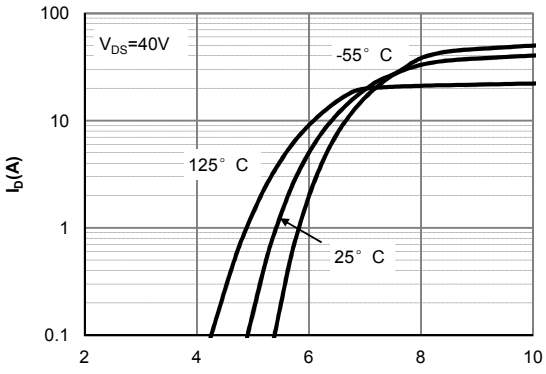


Figure 2: Transfer Characteristics

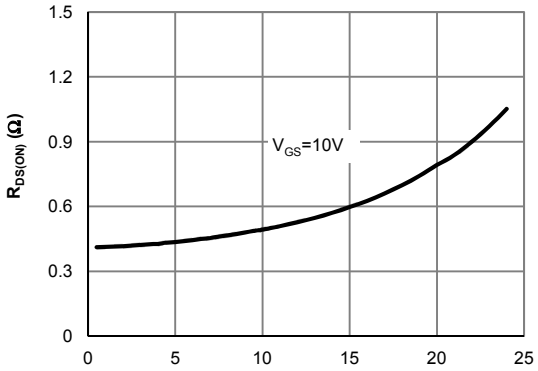


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

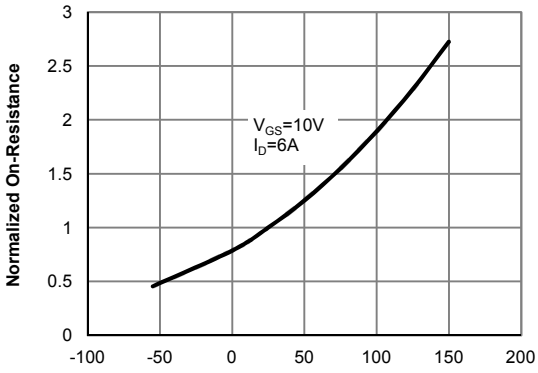


Figure 4: On-Resistance vs. Junction Temperature

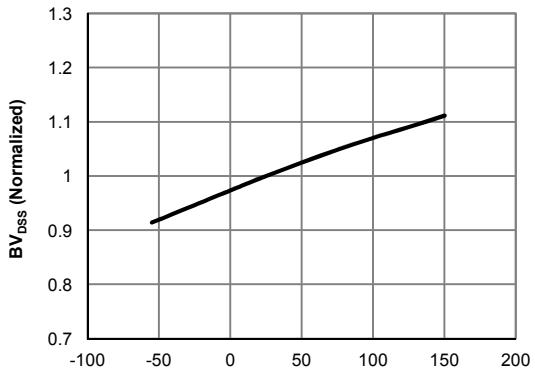


Figure 5: Break Down vs. Junction Temperature

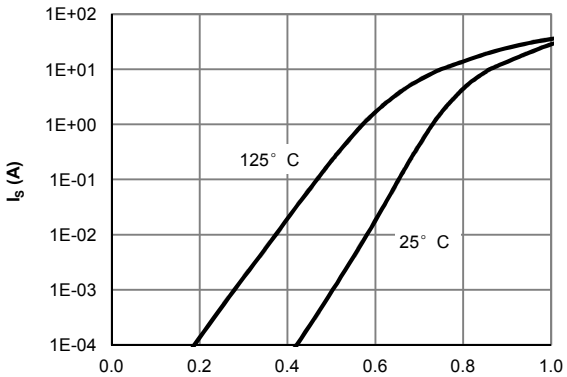


Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

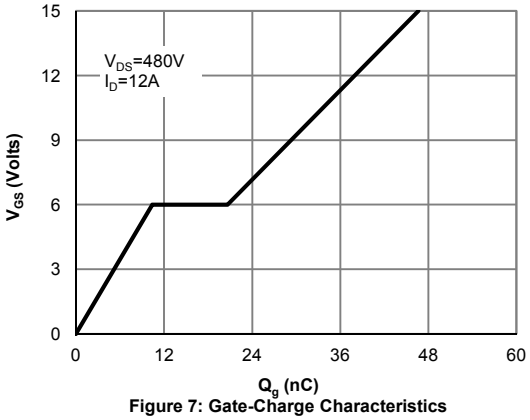


Figure 7: Gate-Charge Characteristics

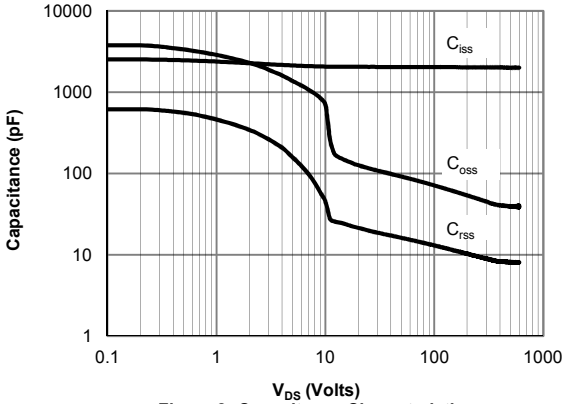


Figure 8: Capacitance Characteristics

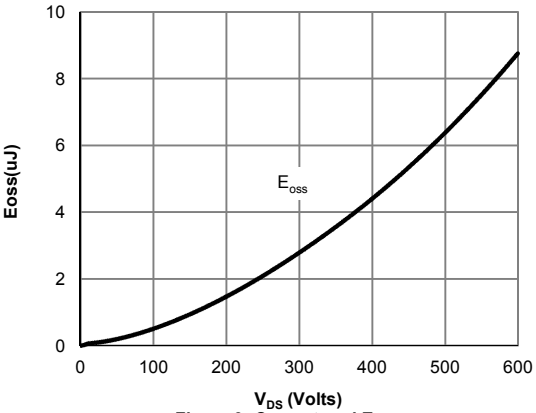


Figure 9: Coss stored Energy

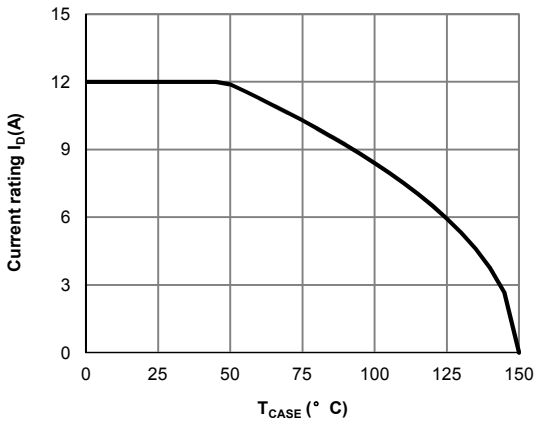


Figure 10: Current De-rating (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

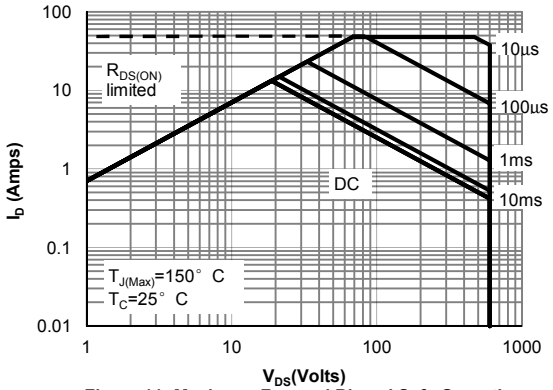


Figure 11: Maximum Forward Biased Safe Operating Area for TO-263 (Note F)

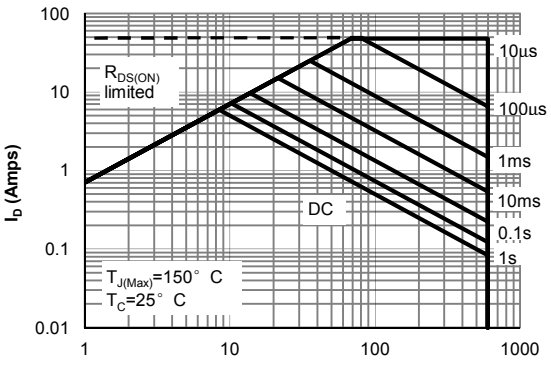


Figure 12: Maximum Forward Biased Safe Operating Area for TO-220F Pb Free (Note F)

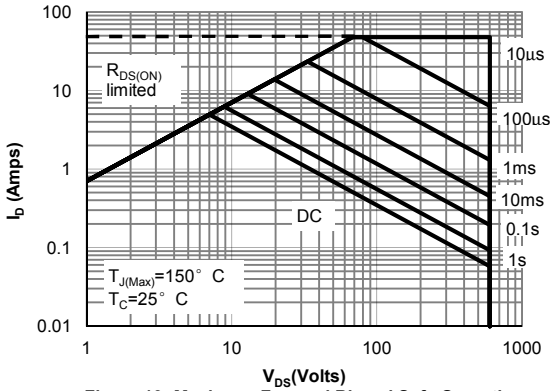


Figure 13: Maximum Forward Biased Safe Operating Area for TO-220F Green (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

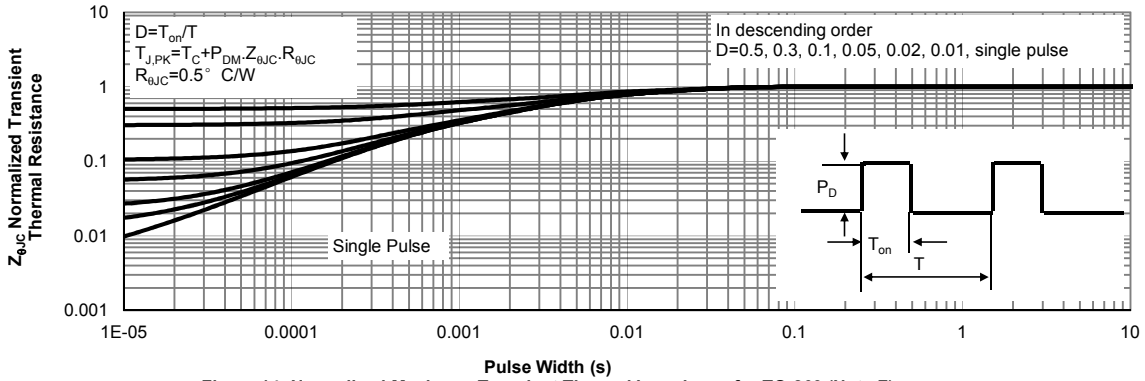


Figure 14: Normalized Maximum Transient Thermal Impedance for TO-263 (Note F)

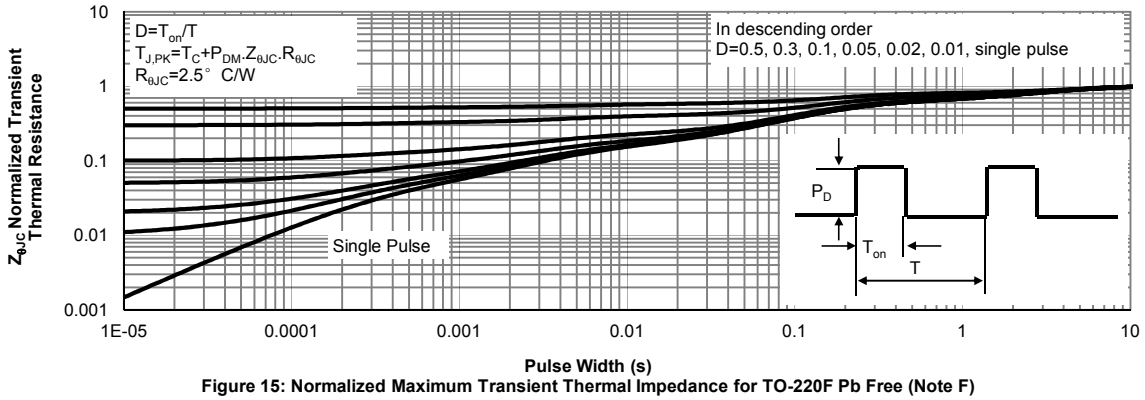


Figure 15: Normalized Maximum Transient Thermal Impedance for TO-220F Pb Free (Note F)



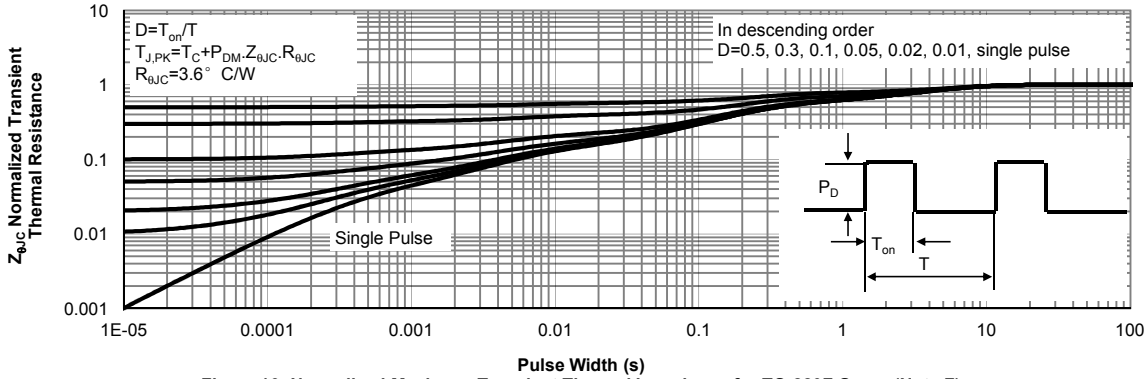


Figure 16: Normalized Maximum Transient Thermal Impedance for TO-220F Green (Note F)


Gate Charge Test Circuit & Waveform

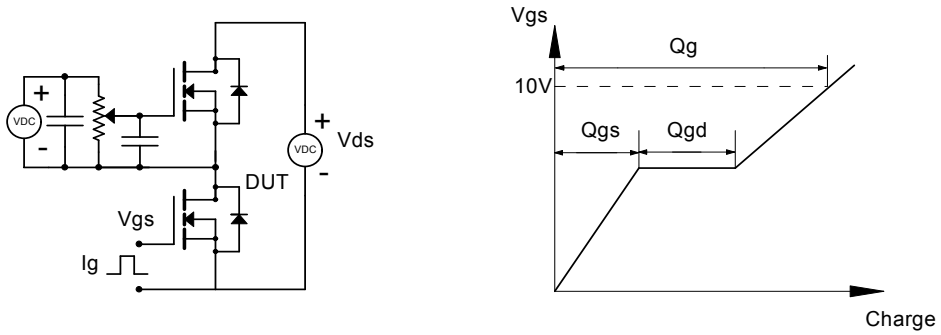

Resistive Switching Test Circuit & Waveforms

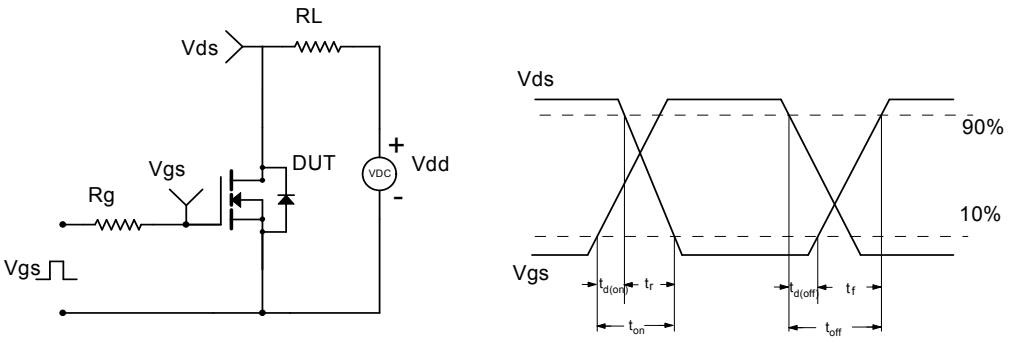

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

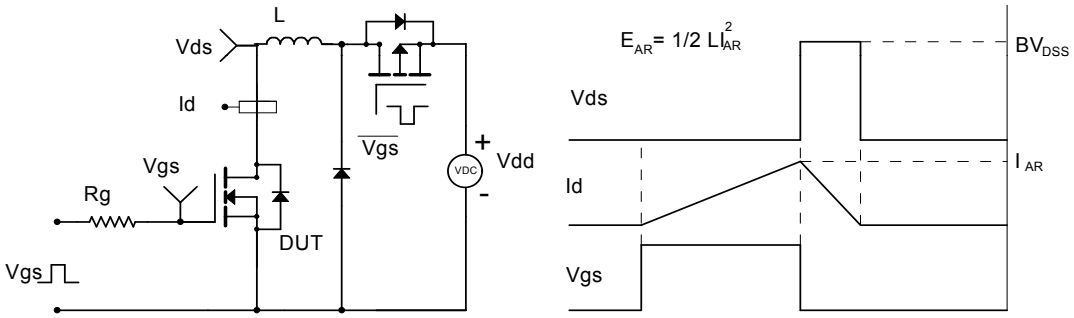

Diode Recovery Test Circuit & Waveforms

