


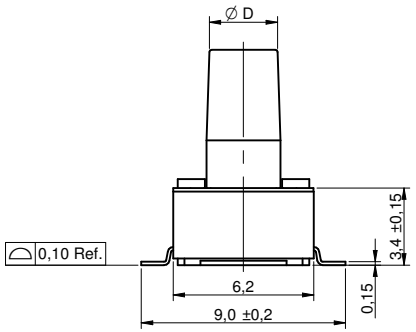








P.C.B. MOUNTING PLAN



SCHEMATIC





TECHNICAL CHARACTERISTICS

SPECIFICATION

>Rating: 50mA, 12VDC
>Contact Resistance:
Initial: 100mOHM max.
After Life Test: 2OHM max.
>Insulation Resistance: min. 100MOHM at 500VDC
>Dielectric Strength: 250VAC for 1 minute
>Stroke: 0.25 ± 0.15mm

MATERIAL

>Cover: Stainless Steel
>Stem: LCP UL 94V-0
>Frame: LCP UL 94V-0, color Black
>Contact: Stainless Steel with silver cladding
>Terminal: Brass with silver plating

SOLDERING INFORMATION

>Terminal in SMD version
>Reflow soldering according to JEDEC J-STD 020 Hot Air
>Hand soldering under 350°C for 3 sec. max

ENVIRONMENTAL

>Storage condition: -40°C ~ +85°C
>Operation condition: -40°C ~ +85°C
>Compliance: Lead Free, ROHS, Reach

PACKAGING INFORMATION

>Tape & Reel

PN	Force	Color of Stem	Life cycle	-043		-050		-070		-080		-095		-130	
				H	Ø D	H	Ø D	H	Ø D	H	Ø D	H	Ø D	H	Ø D
430 182 xxx 816	160g ± 50gf	Black	1.000.000	4.3	3.5	5.0	3.5	7.0	3.0	8.0	3.0	9.5	3.0	13.0	3.0
430 152 xxx 826	260g ± 50gf	White	200.000												
430 152 xxx 836	360g ± 50gf	Salmon	200.000												

Scale - 3:1

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

REV	FILE	DATE	BY
b	new values in chart	12-09-13	WJ
a	warning text	11-10-28	WJ

Projection

GENERAL TOLERANCE
.x = +/- 0,2
.xx = +/- 0,15

Basic material

	Date	Name
Drawn	09-09-15	Jelisarow
Checked		

Würth Elektronik eiCan

DESCRIPTION
SwTact
WS-TSS 6x6mm Tact Switch, SMD version

Scale 3:1 | Position | SIZE A4

Drawing.- No. 4301x2xxx8x6

EDV NO 4301x2xxx8x6.dft

System :Solid Edge V20