19-1997; Rev 0; 4/01

MAXIM

Dual, 256-Tap, Up/Down Interface, Digital Potentiometers

General Description

The MAX5450–MAX5455 are a family of dual digital potentiometers that perform the same function as a mechanical potentiometer or variable resistor. The MAX5451/MAX5453/MAX5455 have two 3-terminal potentiometers and the MAX5450/MAX5452/MAX5454 have two 2-terminal variable resistors. The MAX5450–MAX5455 operate from a +2.7V to +5.5V single-supply voltage and use an ultra-low supply current of 0.1µA. These devices consist of two fixed resistors each with 256 digitally-controlled wiper contacts. The convenient power-on reset (POR) sets the wiper to midscale position at power-up and the easy-to-use up/down interface allows glitchless switching between resistor taps. Six inputs control the 14-pin MAX5451/MAX5453/MAX5455 potentiometers. Four inputs control the 10-pin MAX5450/MAX5452/MAX5454 variable resistors.

The MAX5450–MAX5455 are ideal for applications requiring digitally-controlled resistors. Three resistance values are available: 10kΩ, 50kΩ, and 100kΩ. An end-to-end resistor temperature coefficient of 35ppm/°C and a ratiometric temperature coefficient of 5ppm/°C make the MAX5450–MAX5455 excellent choices for adjustable gain circuit requiring low-temperature drift

The MAX5450–MAX5455 are available in 10-pin µMAX and 14-pin TSSOP packages. Each device is guaranteed over the extended–industrial temperature range (-40°C to +85°C).

Applications

Mechanical Potentiometer Replacement

Low-Drift Programmable-Gain Amplifier (PGA)

Volume Control

LCD Screen Adjustment

Adjustable Voltage References

Adjustable Linear Regulators

Programmable Filters, Delays, Time Constants

Impedance Matching


Features

- **Small-Footprint Packages**
  10-Pin µMAX (MAX5450/MAX5452/MAX5454)
  14-Pin TSSOP (MAX5451/MAX5453/MAX5455)
- **256-Tap Positions**
- **Independent Up/Down Potentiometer Controls (MAX5451/MAX5453/MAX5455)**
- **Ultra-Low 0.1µA Supply Current**
- **+2.7V to +5.5V Single-Supply Operation**
- **Low 35ppm/°C End-to-End Temperature Coefficient**
- **Power-On Reset Sets Wiper to Midscale (Position 127)**
- **Glitchless Switching Between the Resistor Taps**
- **10kΩ, 50kΩ, 100kΩ Resistance Values**

Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE	R (kΩ)
MAX5450EUB	-40°C to +85°C	10 µMAX	10
MAX5451EUD	-40°C to +85°C	14 TSSOP	10
MAX5452EUB	-40°C to +85°C	10 µMAX	50
MAX5453EUD	-40°C to +85°C	14 TSSOP	50
MAX5454EUB	-40°C to +85°C	10 µMAX	100
MAX5455EUD	-40°C to +85°C	14 TSSOP	100

Pin Configurations

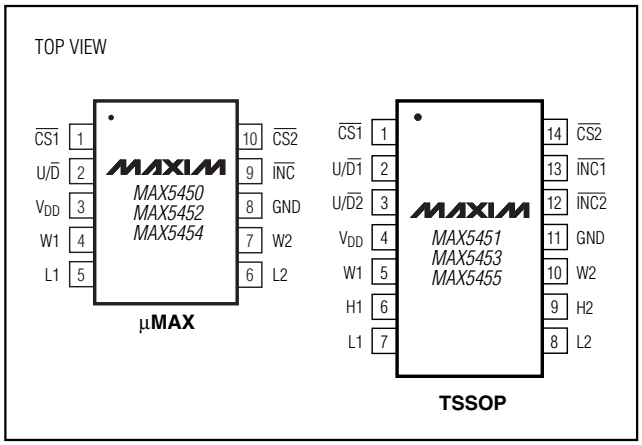

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Dual, 256-Tap, Up/Down Interface, Digital Potentiometers

ABSOLUTE MAXIMUM RATINGS

V_{DD} to GND .....-0.3V to +6V
$\overline{CS}$_, $\overline{INC}$_, and U/$\overline{D}$_ to GND .....-0.3V to +6V
H_, L_, W_ to GND .....-0.3V to (V_{DD} +0.3V)
Maximum Continuous Current into H_, L_, and W_.....±1mA
Continuous Power Dissipation (T_A = +70°C)
10-Pin µMAX (derate 6.94mW/°C above +70°C) 555mW
14-Pin TSSOP (derate 9.1mW/°C above +70°C) 727mW
Operating Temperature Range .....-40°C to +85°C
Junction Temperature.....+150°C
Storage Temperature Range .....-65°C to +150°C
Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{DD} = +2.7V to +5.5V, V_H = V_{DD}, V_L = 0; T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at V_{DD} = +5V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
DC PERFORMANCE (Voltage-Divider Mode, MAX5451/MAX5453/MAX5455 Only)							
Resolution	N			8			Bits
Integral Nonlinearity (Notes 1 and 2)	INL	V_{DD} = +5V				±1	LSB
		V_{DD} = +3V				±1	
Differential Nonlinearity (Notes 1 and 2)	DNL	V_{DD} = +5V				±1	LSB
		V_{DD} = +3V				±1	
End-to-End Resistor Tempco	TC_R				35		ppm/°C
Ratiometric Resistor Tempco					5		ppm/°C
Full-Scale Error		MAX5451			-8		LSB
		MAX5453			-1.6		
		MAX5455			-0.8		
Zero-Scale Error		MAX5451			+8		LSB
		MAX5453			+1.6		
		MAX5455			+0.8		
DC PERFORMANCE (Variable Resistor Mode)							
Resolution	N			8			Bits
Integral Nonlinearity (Notes 1 and 3)	INL	V_{DD} = +5V	MAX5450, MAX5451			±3	LSB
			MAX5452–MAX5455			±1	
		V_{DD} = +3V	MAX5450, MAX5451			±4.5	
			MAX5452–MAX5455			±2	
Differential Nonlinearity (Notes 1 and 3)	DNL	V_{DD} = +5V				±1	LSB
		V_{DD} = +3V				±1	
DC PERFORMANCE (Resistor Characteristics)							
Wiper Resistance (Note 4)	R_W	V_{DD} = +5V			225		Ω
		V_{DD} = +3V				550	
Wiper Capacitance	C_W				10		pF
End-To-End Resistance	R_{HL}	MAX5450, MAX5451		6.5	10	12.5	kΩ
		MAX5452, MAX5453		32	50	62.5	
		MAX5454, MAX5455		60	100	125	

ELECTRICAL CHARACTERISTICS (continued)

(V_{DD} = +2.7V to +5.5V, V_H = V_{DD}, V_L = 0; T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at V_{DD} = +5V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
DIGITAL INPUTS (Note 5)							
Input High Voltage	V_{IH}			0.7 x V_{DD}			V
Input Low Voltage	V_{IL}					0.3 x V_{DD}	V
Input Leakage Current						±1.0	µA
Input Capacitance					5		pF
TIMING CHARACTERISTICS (Analog)							
Wiper-Settling Time (Note 6)	t_{IW}	MAX5451			0.5		µs
		MAX5453			1.2		
		MAX5455			1.8		
TIMING CHARACTERISTICS (Digital, Note 7, Figure 1)							
Maximum $\overline{INC}$ Frequency	f_{MAX}			7			MHz
$\overline{CS}$ to $\overline{INC}$ Setup Time	t_{CI}			25			ns
$\overline{CS}$ to $\overline{INC}$ Hold Time	t_{IC}			0			ns
$\overline{INC}$ Low Period	t_{IL}			25			ns
$\overline{INC}$ High Period	t_{IH}			25			ns
U/$\overline{D}$ to $\overline{INC}$ Setup	t_{DI}			50			ns
U/$\overline{D}$ to $\overline{INC}$ Hold	t_{ID}			0			ns
POWER SUPPLIES							
Supply Voltage	V_{DD}			2.7		5.5	V
Supply Current	I_{DD}	$\overline{CS}$ = $\overline{INC}$ = U/$\overline{D}$ = V_{DD} or GND	V_{DD} = +5V		0.7	2	µA
			V_{DD} = +2.7V		0.1		

Note 1: Linearity is defined in terms of the H_ to L_ code-dependent resistance.

Note 2: The DNL and INL are measured with the potentiometer configured as a voltage divider with H_ = V_{DD} and L_ = GND. The wiper terminal is unloaded and measured with an ideal voltmeter.

Note 3: The DNL and INL are measured with the potentiometer configured as a variable resistor. For the 3-terminal potentiometers (MAX5451/MAX5453/MAX5455), H_ is unconnected and L_ = GND. For the 2-terminal potentiometers (MAX5450/MAX5452/MAX5454), L_ = GND. At V_{DD} = +5V, the wiper terminal is driven with a source current of 400µA for the 10kΩ configuration, 80µA for the 50kΩ configuration, and 40µA for the 100kΩ configuration. At V_{DD} = +3V, 200µA/40µA/20µA for 10kΩ/50kΩ/100kΩ configuration, respectively.

Note 4: The wiper resistance is the worst value measured by injecting the currents given in Note 3 into W_ with L_ = GND. $R_{W_}$ = ($V_{W_}$ - $V_{H_}$) / $I_{W_}$.

Note 5: Device draws higher supply current when digital inputs are driven with voltages between 0.3 x V_{DD} and 0.7 x V_{DD}. (See Supply Current vs. Digital Input Voltage in the *Typical Operating Characteristics*.)

Note 6: Wiper-Settling Time is the worst case 0% to 50% rise-time measured between consecutive wiper positions. H_ = V_{DD}, L_ = GND, and the wiper terminal is unloaded and measured with a 10pF oscilloscope probe (see Tap-To-Tap Switching Transient in the *Typical Operating Characteristics*).


Note 7: Digital timing is guaranteed by design.

Dual, 256-Tap, Up/Down Interface, Digital Potentiometers


Typical Operating Characteristics

(V_{DD} = +5V, T_A = +25°C, unless otherwise noted.)


WIPER RESISTANCE vs. WIPER VOLTAGE (10kΩ)

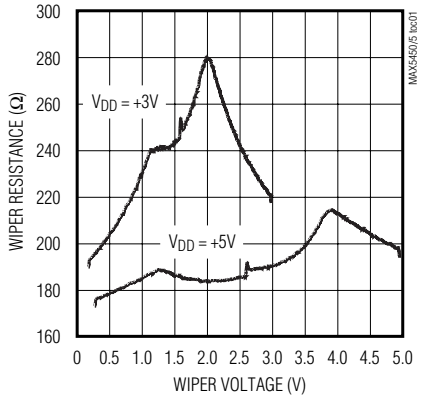


WIPER RESISTANCE vs. WIPER VOLTAGE (50kΩ)

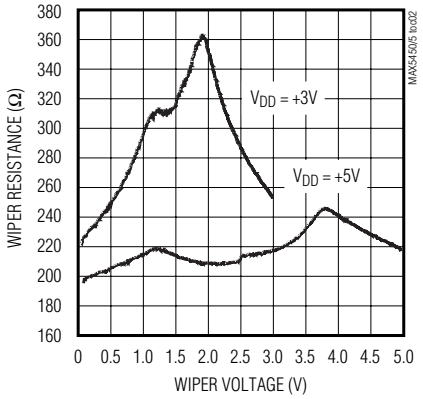


WIPER RESISTANCE vs. WIPER VOLTAGE (100kΩ)

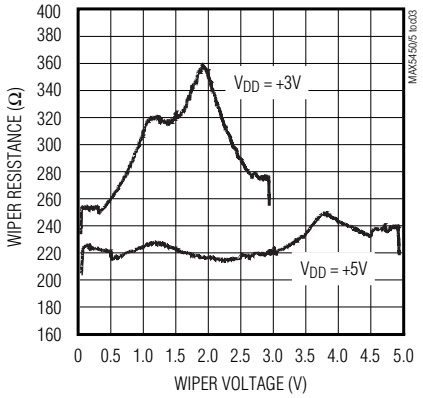


WIPER RESISTANCE vs. WIPER POSITION (10kΩ)

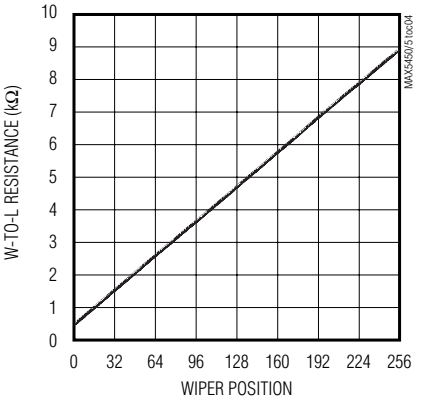


WIPER RESISTANCE vs. WIPER POSITION (50kΩ)

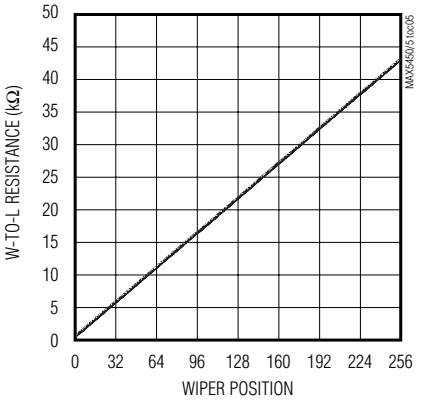


WIPER RESISTANCE vs. WIPER POSITION (100kΩ)

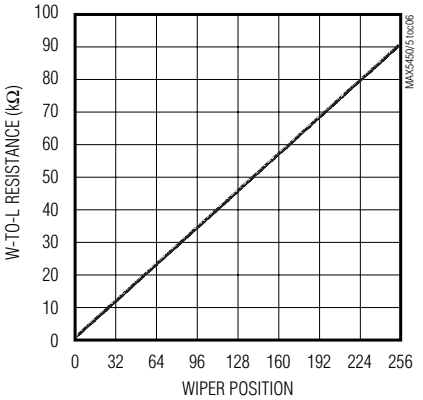


VARIABLE RESISTOR DNL vs. WIPER POSITION (10kΩ)

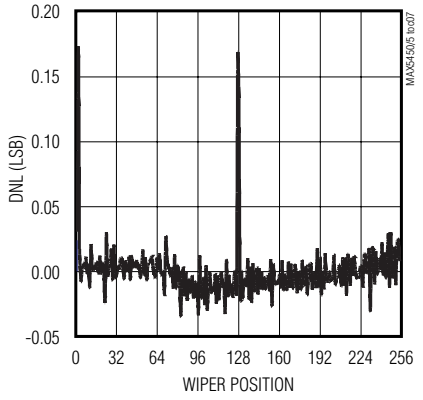

VARIABLE RESISTOR INL vs. WIPER POSITION (MAX5451)

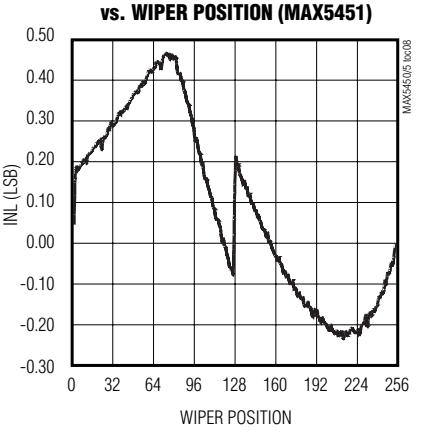


VARIABLE RESISTOR DNL vs. WIPER POSITION (50kΩ)

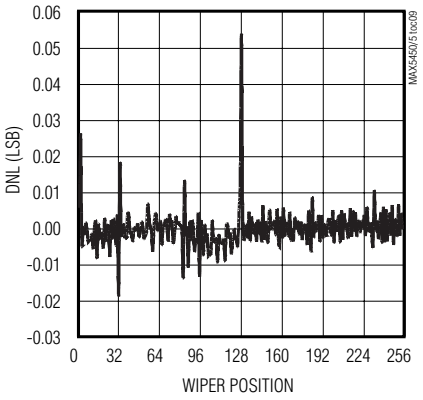


Typical Operating Characteristics (continued)

(V_{DD} = +5V, T_A = +25°C, unless otherwise noted.)


VARIABLE RESISTOR INL vs. WIPER POSITION (MAX5453)

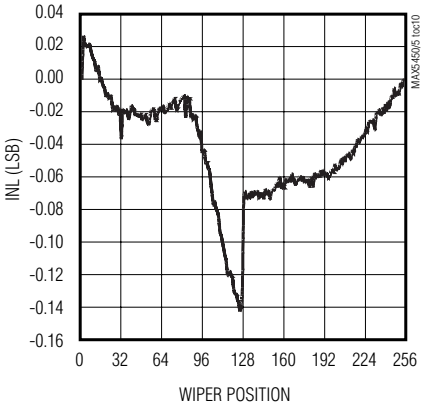


VARIABLE RESISTOR DNL vs. WIPER POSITION (100kΩ)

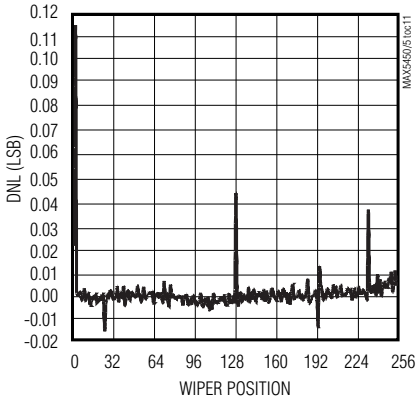


VARIABLE RESISTOR INL vs. WIPER POSITION (MAX5455)

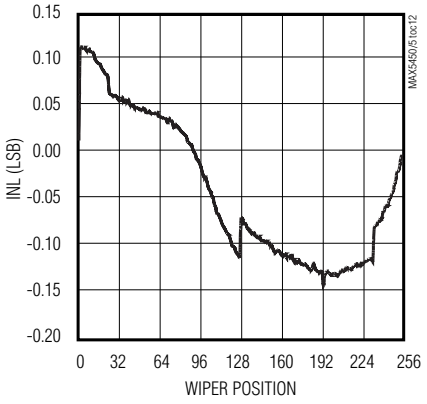


VOLTAGE-DIVIDER DNL vs. WIPER POSITION (10kΩ)

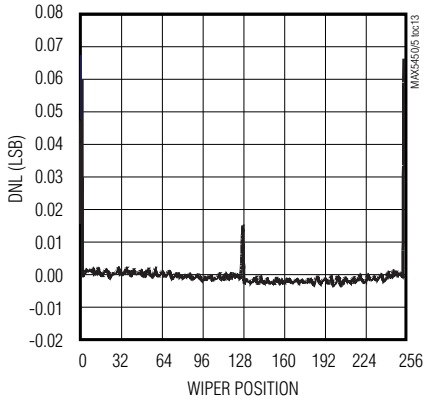


VOLTAGE-DIVIDER INL vs. WIPER POSITION (10kΩ)

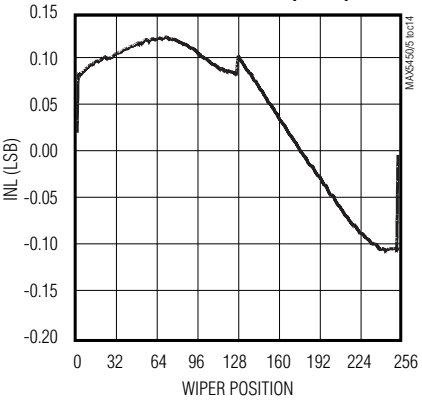


VOLTAGE-DIVIDER DNL vs. WIPER POSITION (50kΩ)

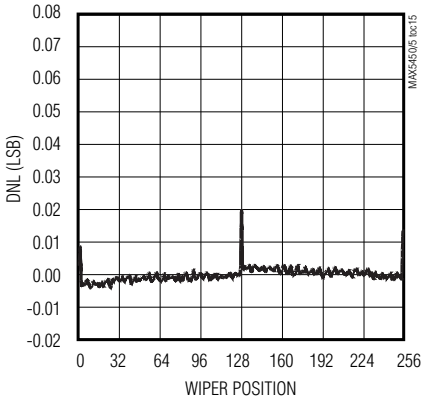


VOLTAGE-DIVIDER INL vs. WIPER POSITION (50kΩ)

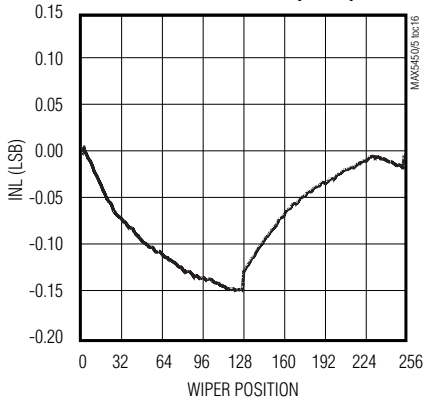

VOLTAGE-DIVIDER DNL vs. WIPER POSITION (100kΩ)

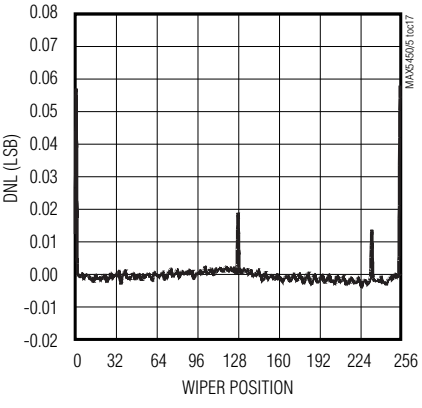

VOLTAGE-DIVIDER INL vs. WIPER POSITION (100kΩ)

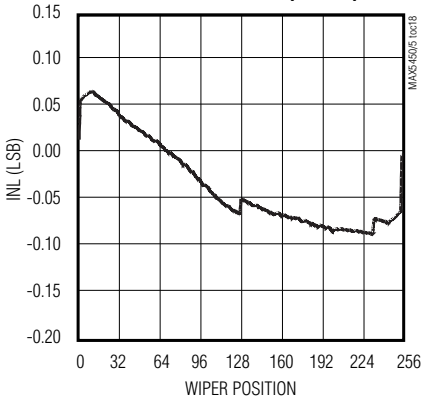


Dual, 256-Tap, Up/Down Interface, Digital Potentiometers


Typical Operating Characteristics (continued)

(V_{DD} = +5V, T_A = +25°C, unless otherwise noted.)


SUPPLY CURRENT vs. SUPPLY VOLTAGE

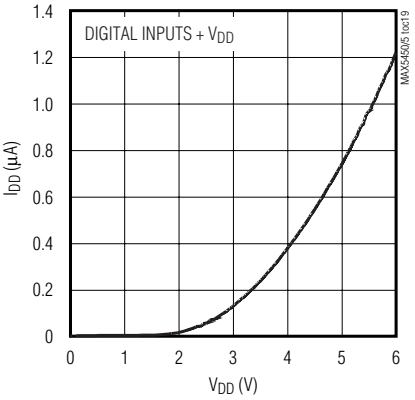


SUPPLY CURRENT vs. DIGITAL INPUT VOLTAGE

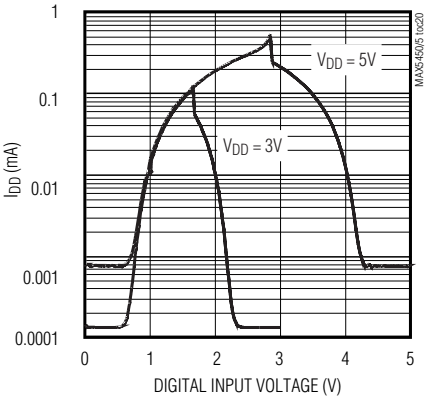


SUPPLY CURRENT vs. TEMPERATURE

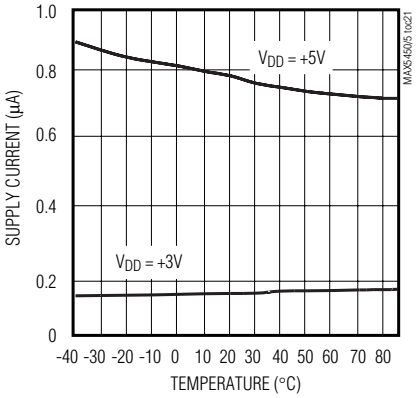

END-TO-END RESISTANCE % CHANGE vs. TEMPERATURE

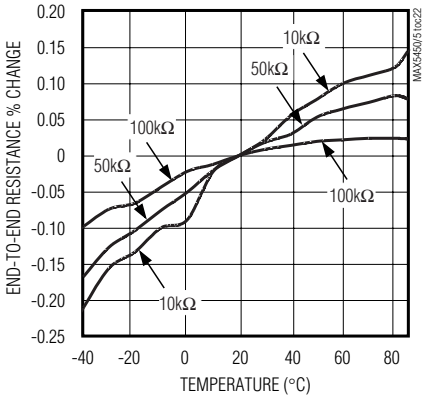

TAP-TO-TAP SWITCHING TRANSIENT

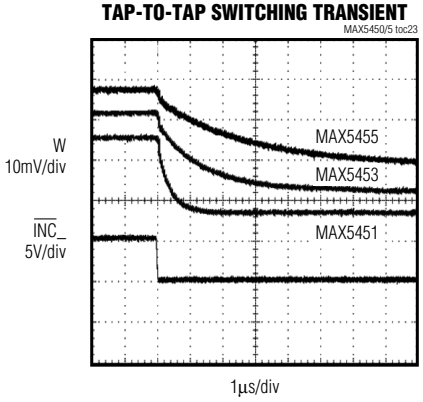

Pin Description

PIN		NAME	FUNCTION
MAX5451 MAX5453 MAX5455	MAX5450 MAX5452 MAX5454		
1	1	$\overline{CS1}$	Chip-Select Input of Resistor 1. Drive low to change wiper position W1 through $\overline{INC}$ and U/$\overline{D}$.
—	2	U/$\overline{D}$	Up/Down Control Input. With U/$\overline{D}$ low, a high-to-low $\overline{INC}$ transition decrements wiper position. With U/$\overline{D}$ high, a high-to-low $\overline{INC}$ transition increments wiper position.
2	—	U/$\overline{D1}$	Up/Down Control Input of Resistor 1. With U/$\overline{D1}$ low, a high-to-low $\overline{INC1}$ transition decrements wiper position W1. With U/$\overline{D1}$ high, a high-to-low $\overline{INC1}$ transition increments wiper position W1.
3	—	U/$\overline{D2}$	Up/Down Control Input of Resistor 2. With U/$\overline{D2}$ low, a high-to-low $\overline{INC2}$ transition decrements wiper position W2. With U/$\overline{D2}$ high, a high-to-low $\overline{INC2}$ transition increments wiper position W2.
4	3	V_{DD}	Power Supply
5	4	W1	Wiper Terminal of Resistor 1
6	—	H1	High Terminal of Resistor 1
7	5	L1	Low Terminal of Resistor 1
8	6	L2	Low Terminal of Resistor 2
9	—	H2	High Terminal of Resistor 2
10	7	W2	Wiper Terminal of Resistor 2
11	8	GND	Ground
—	9	$\overline{INC}$	Wiper Increment Control Input. With $\overline{CS1}$ low, a high-to-low transition increments (U/$\overline{D}$ high) or decrements (U/$\overline{D}$ low) wiper position W1. This applies similarly for $\overline{CS2}$ and W2.
12	—	$\overline{INC2}$	Wiper Increment Control Input. With $\overline{CS2}$ low, a high-to-low transition increments (U/$\overline{D2}$ high) or decrements (U/$\overline{D2}$ low) wiper position W2.
13	—	$\overline{INC1}$	Wiper Increment Control Input. With $\overline{CS1}$ low, a high-to-low transition increments (U/$\overline{D1}$ high) or decrements (U/$\overline{D1}$ low) wiper position W1.
14	10	$\overline{CS2}$	Chip-Select Input of Resistor 2. Drive low to change wiper position W2 through $\overline{INC}$ and U/$\overline{D}$.

Dual, 256-Tap, Up/Down Interface, Digital Potentiometers

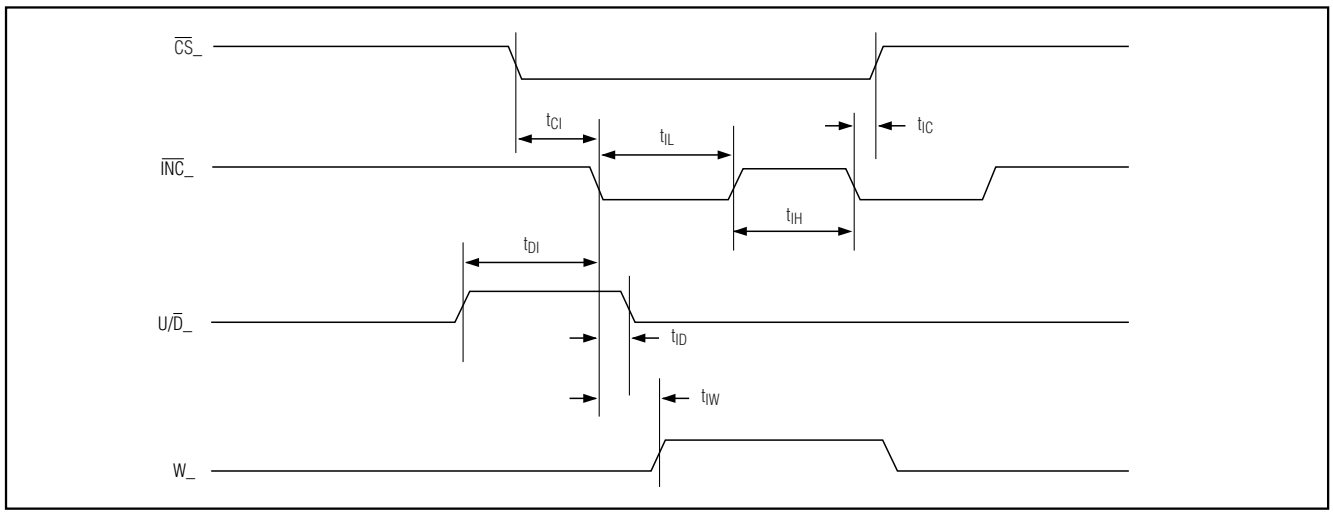


Figure 1. Digital Interface and Timing diagram

Detailed Description

The MAX5450–MAX5455 contain two independent resistor arrays each with 255-resistive elements. 256-tap points are accessible to the wiper along the resistor arrays between H and L (Figure 2). Power-on reset circuitry sets the wiper to midscale (position 127) at power-up.

Logic inputs $\overline{CS}$, U/$\overline{D}$, and $\overline{INC}$ determine the wiper position of the MAX5450–MAX5455. With $\overline{CS}$ low and U/$\overline{D}$ high, a high-to-low (falling edge) transition on $\overline{INC}$, increments the internal counter, which increases the resistance between W and L. When both $\overline{CS}$ and U/$\overline{D}$ are low, a high-to-low $\overline{INC}$ transition decrements the internal counter, decreasing the resistance between W and L (Figure 1). The wiper performs a make-before-break transition ensuring that there is never an open circuit during a transition from one resistor tap to another. When the wiper is at either end (max/min) of the resistor array, additional transitions in the direction of the endpoint will not change the counter value (the counter will not wrap around).

The MAX5450/MAX5452/MAX5454 are similar to the MAX5451/MAX5453/MAX5455 except for internal connections. The MAX5450/MAX5452/MAX5454 internally connect $\overline{INC1}$ to $\overline{INC2}$, U/$\overline{D1}$ to U/$\overline{D2}$, W1 to H1, and W2 to H2 (Figures 3 and 4). The internal connections configure the MAX5450/MAX5452/MAX5454 to be variable resistors.

Applications Information

The MAX5450–MAX5455 are ideal for adjustable voltage or adjustable gain circuits where accurate adjustable resistances are required.

Adjustable Current to Voltage Converter

Figure 5 shows the MAX5450/MAX5452/MAX5454 with a MAX4250 low-noise op amp to fine-tune a current to voltage converter. The physical sizes of both devices minimize circuit space.

Adjustable Gain Amplifier

Figures 6a and 6b shows the MAX5450–MAX5455 digitally adjusting the gain of the MAX4493 general-purpose, dual supply op amp. Figure 6a shows the MAX5450/MAX5452/MAX5454 variable resistor in series with a resistor to ground to form the adjustable gain control. Figure 6b shows the MAX5451/MAX5453/MAX5455 as a 3-terminal potentiometer. In these applications the low 5ppm/°C ratiometric tempco allows for a very stable adjustable gain over temperature.

Adjustable Linear Regulator

In Figure 7, the MAX5450/MAX5452/MAX5454 is shown digitally adjusting the output voltage of the MAX8866 dual linear regulator. In this circuit, the MAX5450/MAX5452/MAX5454 is connected in series with a resistor to ground to form the adjustable feedback stage. The 8-bit MAX5450/MAX5452/MAX5454 allows precise tuning of the output voltage.

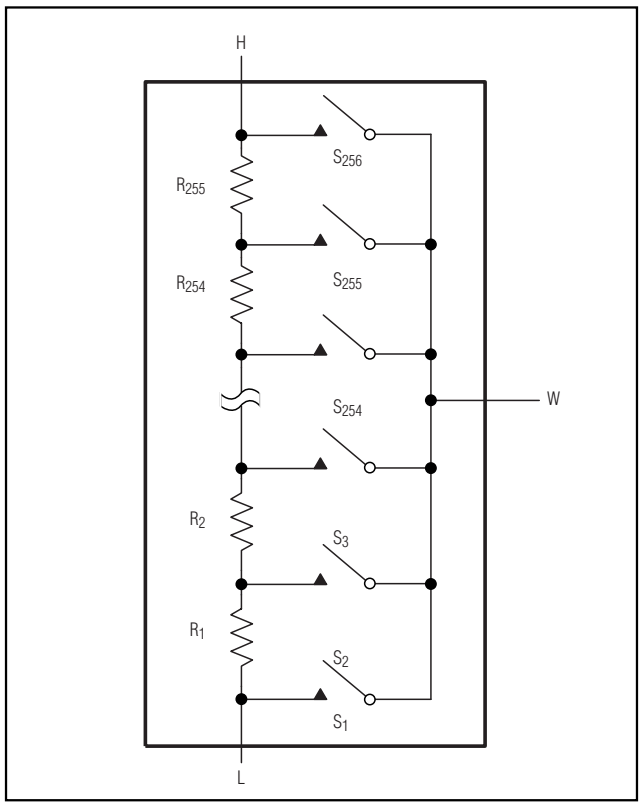


Figure 2. Simplified Digital Potentiometer Resistor Array

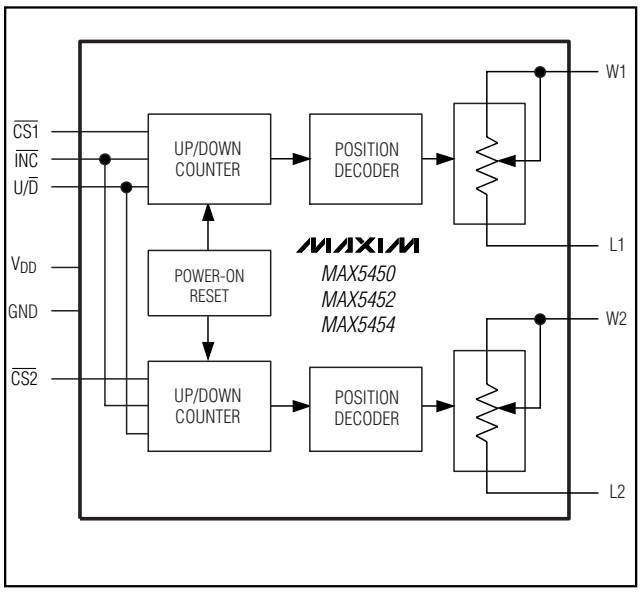


Figure 3. MAX5450/MAX5452/MAX5454 Simplified Functional Diagram

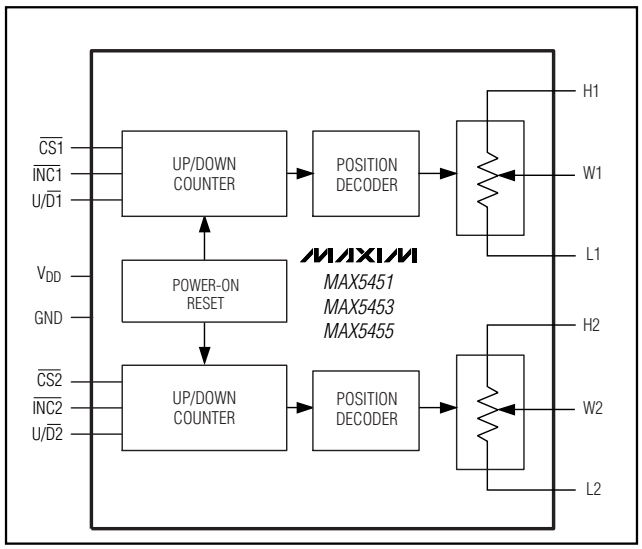


Figure 4. MAX5451/MAX5453/MAX5455 Simplified Functional Diagram

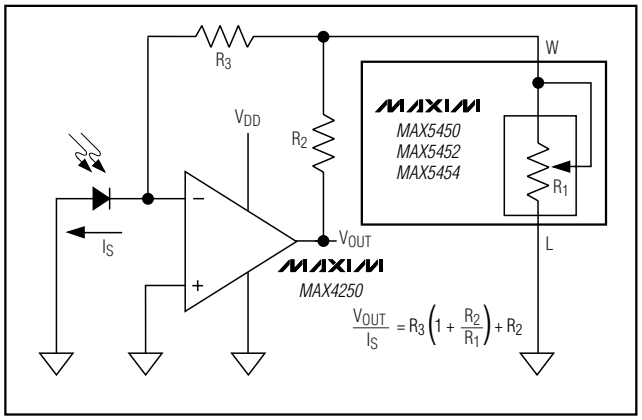


Figure 5. Adjustable Current to Voltage Converter

Dual, 256-Tap, Up/Down Interface, Digital Potentiometers

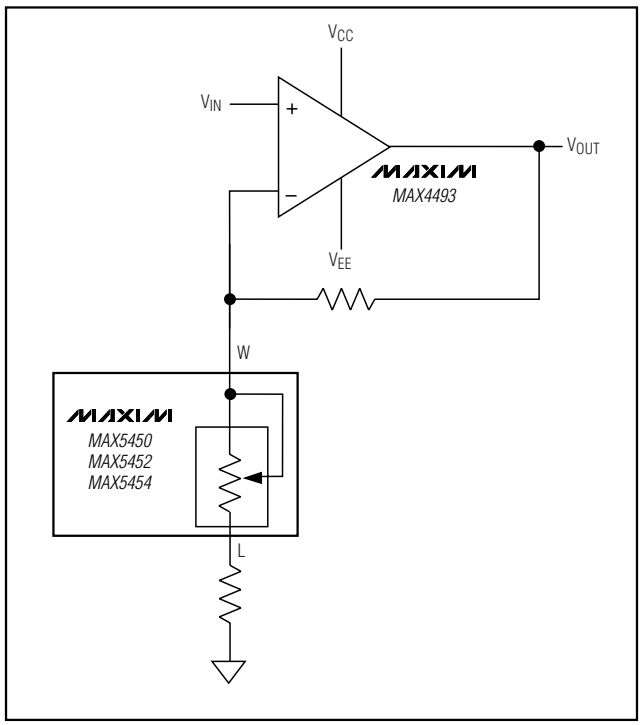


Figure 6a. Variable Resistor Adjustable-Gain Amplifier

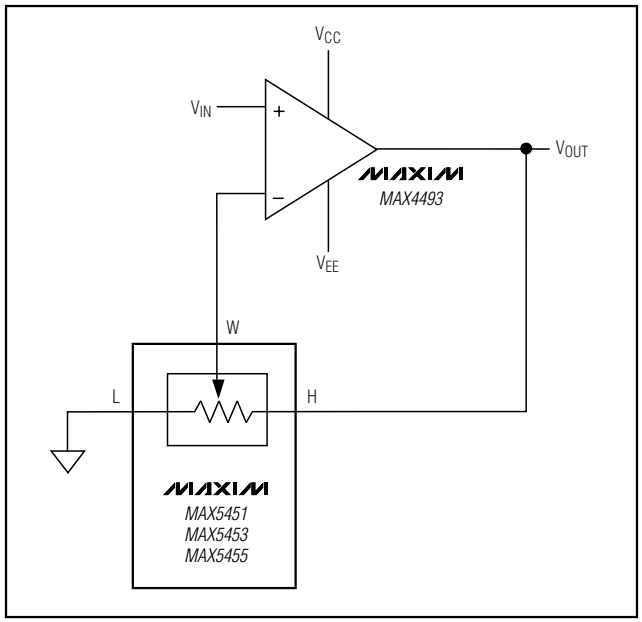


Figure 6b. Potentiometer Adjustable-Gain Amplifier

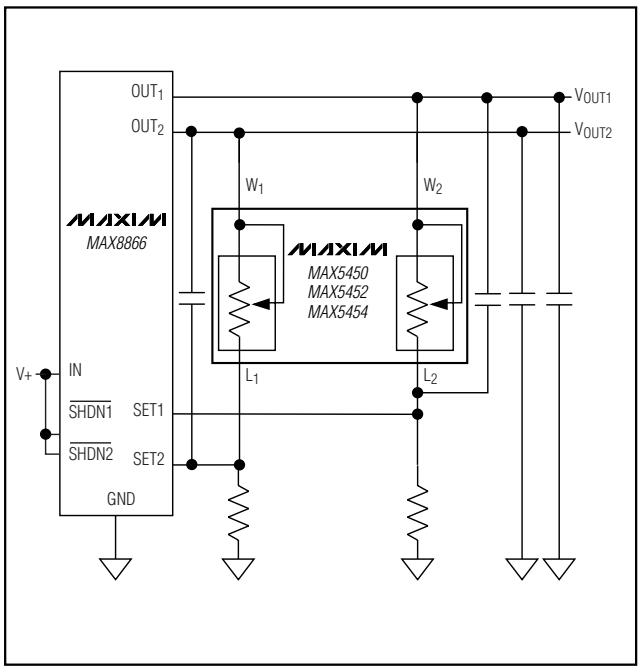


Figure 7. Adjustable Dual Linear Regulator

Truth Table

$\overline{CS}$	U/$\overline{D}$	$\overline{INC}$	W
H	X	X	O
L	L	↑	O
L	H	↑	O
L	L	↓	–
L	H	↓	+

X = Don't care
O = Previous State
↓ = High-to-Low Transition
– = Decrement
↑ = Low-to-High Transition
+ = Increment


Chip Information


TRANSISTOR COUNT: 9680

PROCESS: CMOS


Package Information


10LUMAX.EPS

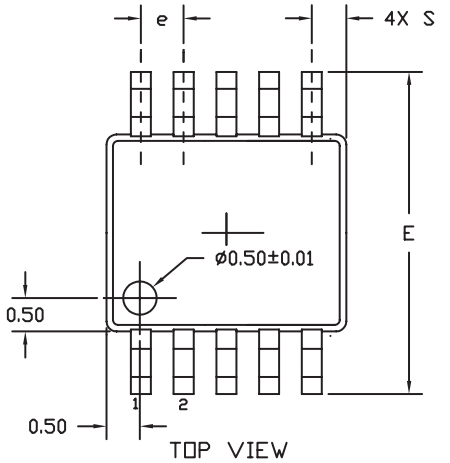

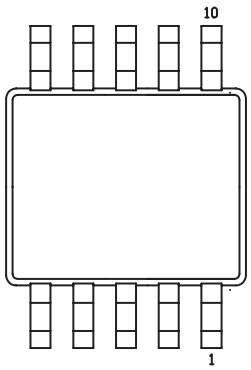

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.037	0.043	0.94	1.10
A1	0.002	0.006	0.05	0.15
D1	0.116	0.120	2.95	3.05
D2	0.114	0.118	2.89	3.00
E1	0.116	0.120	2.95	3.05
E2	0.114	0.118	2.89	3.00
E	0.187	0.199	4.75	5.05
L	0.0157	0.0275	0.40	0.70
L1	0.037 REF		0.940 REF	
b	0.007	0.0106	0.177	0.270
e	0.0197 BSC		.500 BSC	
c	0.0035	0.0078	0.090	0.200
S	0.0196 REF		.498 REF	
α	0°	6°	0°	6°

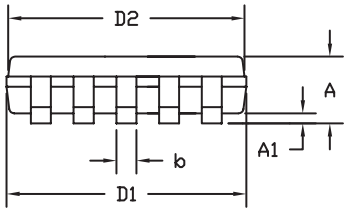

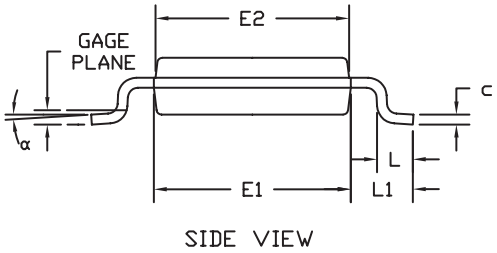

NOTES:
1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm (.006").
3. CONTROLLING DIMENSION: MILLIMETERS.
4. MEETS JEDEC MO187.

MAXIM

PROPRIETARY INFORMATION

TITLE:


PACKAGE OUTLINE, 10L uMAX

APPROVAL	DOCUMENT CONTROL NO.	REV	
	21-0061	H	1/1

Dual, 256-Tap, Up/Down Interface, Digital Potentiometers

Package Information (continued)

TSSOP,NO PADS.EPS

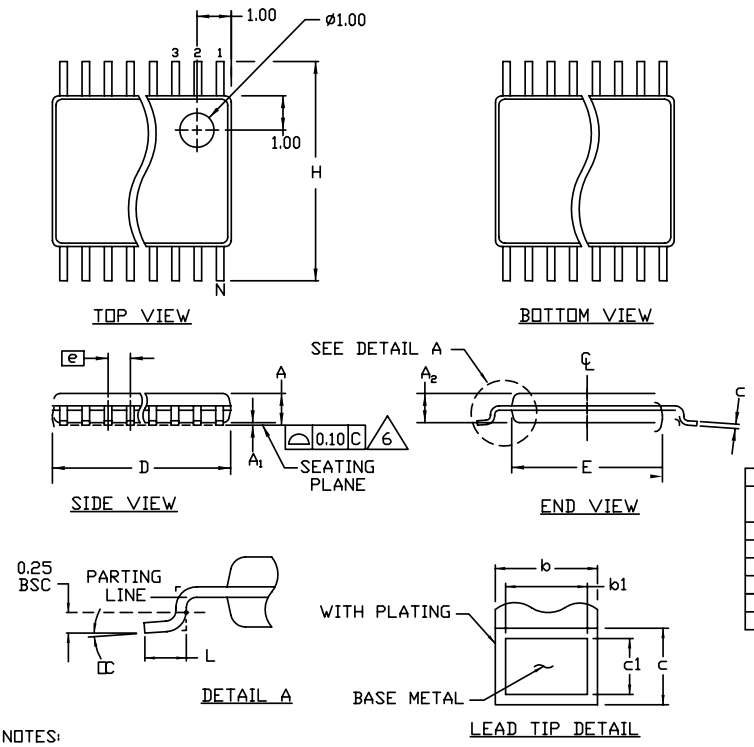

SYMBOL	COMMON DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	———	1.10		.043
A_1	0.05	0.15	.002	.006
A_2	0.85	0.95	.033	.037
b	0.19	0.30	.007	.012
b1	0.19	0.25	.007	.010
c	0.090	0.20	.0035	.008
c1	0.090	0.135	.0035	.0053
D	SEE VARIATIONS		SEE VARIATIONS	
E	4.30	4.50	.169	.177
e	0.65 BSC		.026 BSC	
H	6.25	6.50	.246	.256
L	0.50	0.70	.020	.028
N	SEE VARIATIONS		SEE VARIATIONS	
α	0°	8°	0°	8°

JEDEC			VARIATIONS			
MO-153	N		MILLIMETERS		INCHES	
			MIN.	MAX.	MIN.	MAX.
AB	14	D	4.90	5.10	.193	.201
AC	16	D	4.90	5.10	.193	.201
AD	20	D	6.40	6.60	.252	.260
AE	24	D	7.70	7.90	.303	.311
AF	28	D	9.60	9.80	.378	.386

NOTES:
1. DIMENSIONS D AND E DO NOT INCLUDE FLASH
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm PER SIDE
3. CONTROLLING DIMENSION: MILLIMETER
4. MEETS JEDEC OUTLINE MO-153 VARIATIONS- AB, AC, AD, AE, AF
5. "N" REFERS TO NUMBER OF LEADS
6. THE LEAD TIPS MUST LIE WITHIN A SPECIFIED ZONE. THIS TOLERANCE ZONE IS DEFINED BY TWO PARALLEL PLANES. ONE PLANE IS THE SEATING PLANE, DATUM [-C-]; THE OTHER PLANE IS AT THE SPECIFIED DISTANCE FROM [-C-] IN THE DIRECTION INDICATED.

MAXIM
PROPRIETARY INFORMATION

TITLE:
PACKAGE OUTLINE, TSSOP, 4.40 MM BODY

APPROVAL	DOCUMENT CONTROL NO.	REV	
	21-0066	D	1/1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2001 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.