PASTERNACK
www.pasternack.com



6 dB Fixed Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts Up To 1 GHz

TECHNICAL DATA SHEET PE7057-6

6 dB Fixed Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts Up To 1 GHz

Configuration

Design	Fixed, Bidirectional Attenuator
Connector 1	F Male
Connector 2	F Female
Body Material and Plating	Brass, Nickel

Electrical Specifications

Frequency Range, MHz	DC to 1,000
Impedance, Ohms	75
Attenuation Value, dB	6
Maximum Input Power, Watts	2
Maximum VSWR	1.3:1

Frequency 1

Range, MHz	DC to 1,000
VSWR	1.3:1
Attenuation Accuracy, dB	± 0.5

Mechanical Specifications

Size

Length, in [mm]	1.647 [41.83]
Width, in [mm]	0.438 [11.13]

Connector 1

Type	F Male
Hex Size, in.	7/16
Torque, in-lbs [Nm]	15 [1.7]

Connector 2

Type	F Female

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 6 dB Fixed Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts Up To 1 GHz PE7057-6

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2013 Pasternack Enterprises All Rights Reserved

PASTERNACK®
www.pasternack.com



6 dB Fixed Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts Up To 1 GHz

TECHNICAL DATA SHEET PE7057-6

Plotted and Other Data

Notes: Values at 25 °C, sea level

6 dB Fixed Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts Up To 1 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 6 dB Fixed Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts Up To 1 GHz PE7057-6

URL: http://www.pasternack.com/6db-fixed-f-male-f-female-2-watts-attenuator-pe7057-6-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2013 Pasternack Enterprises All Rights Reserved

© 2013 Pasternack Enterprises All Rights Reserved

PE7057-6 CAD Drawing

6 dB Fixed Attenuator, 75 F Male To 75 F Female Brass
Nickel Body Rated To 2 Watts Up To 1 GHz

P/N	ATTEN.	FIGURE
PE7057-1	1 dB	1
PE7057-2	2 dB	1
PE7057-3	3 dB	1
PE7057-6	6 dB	1
PE7057-10	10 dB	1

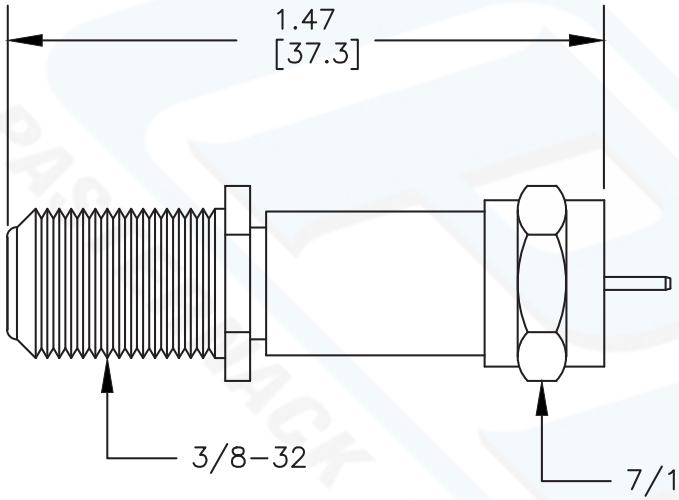


FIGURE 1

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE
PE7057

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919	CAD FILE 083002	SCALE N/A	SIZE A	XXXX